

stone concave




technical information

carrara

properties	value
DENSITY	2699 kg/mc
COMPRESSIVE STRENGTH	130 MPa
FLEXURAL STRENGTH	22 MPa
OPEN POROSITY	0.7 %
WATER ABSORPTION	0.2 %
FROST RESISTANCE	Partly
IMPORTANT	STONE CONCAVE is a decorative design element for vertical surfaces only and should be handled with care. The product should be supported on both ends, preferably carried vertically when once removed from the box. Installation should be completed on a non-moisture sensitive substrate, using a fast setting adhesive, stone friendly grout and silicones. Upon installation, the stone should be sealed with appropriate stone sealer, prior and after grouting.

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

stone concave

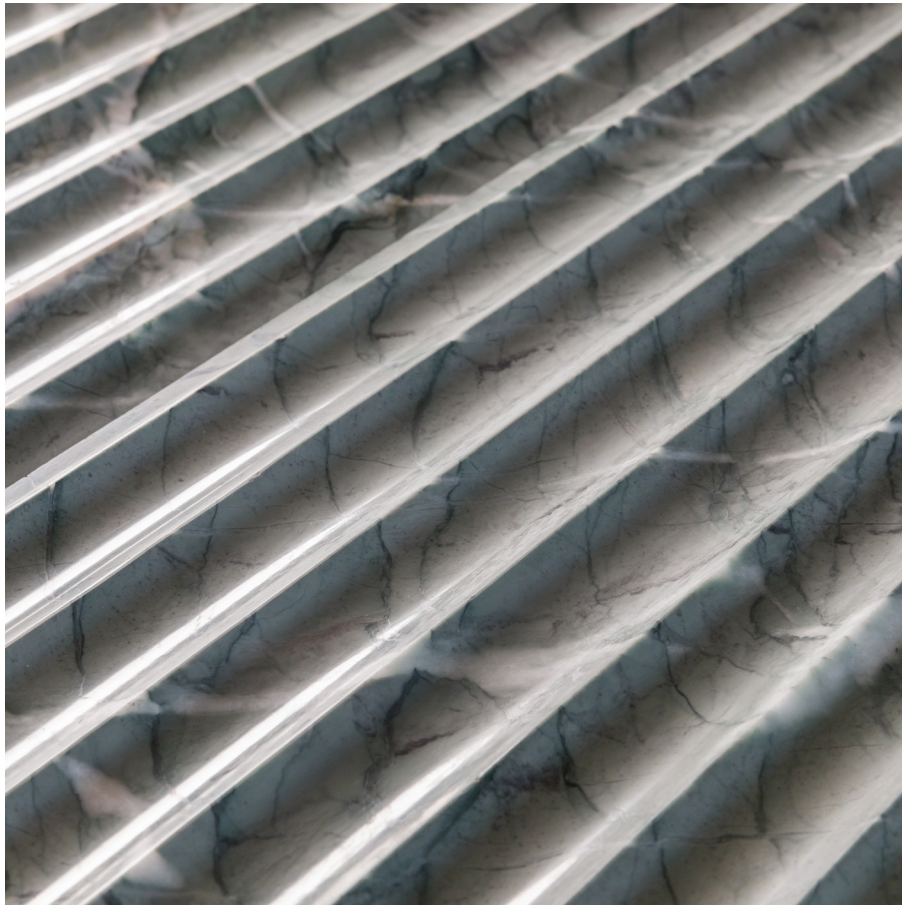

technical information

laurel

properties	value
COMPRESSIVE TENSILE STRENGTH	1480 kg/ cm ²
BENDING UNIT TENSILE STRENGTH	145 kg/cm ²
COEFFICIENT OF LINEAR THERMAL EXPANSION	0.0058 mm/m°C
WATER IMBIBITION COEFFICIENT	0.18%
IMPACT RESISTANCE, MINIMUM DROP HEIGHT	49 cm
WEIGHT PER UNIT VOLUME	2700 kg/m ³
IMPORTANT	STONE CONCAVE is a decorative design element for vertical surfaces only and should be handled with care. The product should be supported on both ends, preferably carried vertically when once removed from the box. Installation should be completed on a non-moisture sensitive substrate, using a fast setting adhesive, stone friendly grout and silicones. Upon installation, the stone should be sealed with appropriate stone sealer, prior and after grouting.

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

stone concave




technical information

levanto

properties	value
DENSITY	2750 kg/mc
COMPRESSIVE STRENGTH	218 MPa
FLEXURAL STRENGTH	8.6 MPa
WATER ABSORPTION	0.4 %
IMPORTANT	STONE CONCAVE is a decorative design element for vertical surfaces only and should be handled with care. The product should be supported on both ends, preferably carried vertically when once removed from the box. Installation should be completed on a non-moisture sensitive substrate, using a fast setting adhesive, stone friendly grout and silicones. Upon installation, the stone should be sealed with appropriate stone sealer, prior and after grouting.

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

stone concave

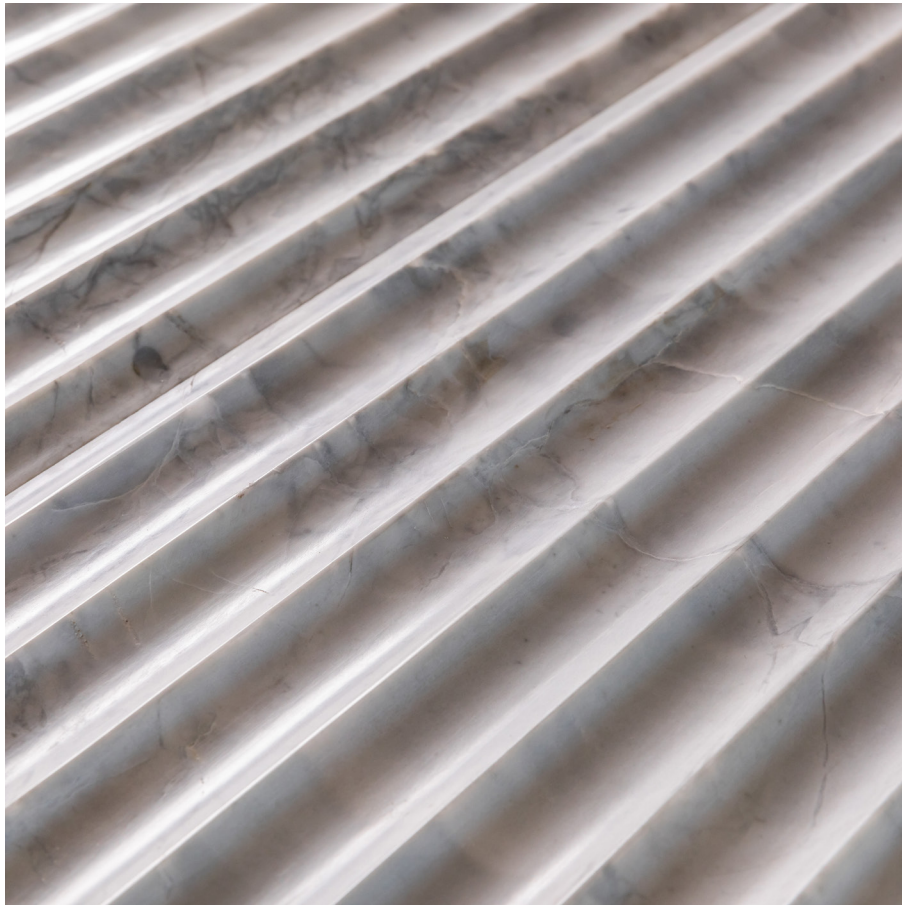

technical information

super white

properties	value
DENSITY	2839 kg/mc
COMPRESSIVE STRENGTH	121 MPa
FLEXURAL STRENGTH	15.3 MPa
OPEN POROSITY	0.69%
WATER ABSORPTION	0.2%
FROST RESISTANCE	Partly
IMPORTANT	STONE CONCAVE is a decorative design element for vertical surfaces only and should be handled with care. The product should be supported on both ends, preferably carried vertically when once removed from the box. Installation should be completed on a non-moisture sensitive substrate, using a fast setting adhesive, stone friendly grout and silicones. Upon installation, the stone should be sealed with appropriate stone sealer, prior and after grouting.

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.