




terra

technical data - tiles

properties	test method	value
WATER ABSORPTION	ISO 10545-3	7.09%
BENDING STRENGTH	ISO 10545-4	20.7 MPa
IMPACT RESISTANCE	ISO 10545-5	0.80
ABRASION RESISTANCE	ISO 10545-6	215 mm ³
RESISTANCE TO FROST	ISO 10545-12	>100
MOISTURE EXPANSION	ISO 10545-10	0.228 mm/m
SURFACE SCRATCH HARDNESS	-	0.67 dry 0.58 wet

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

- Sealing is required prior and post grouting for all sizes.
- Dark grout colours are not recommended.
- Minimum 10mm grout joints are recommended

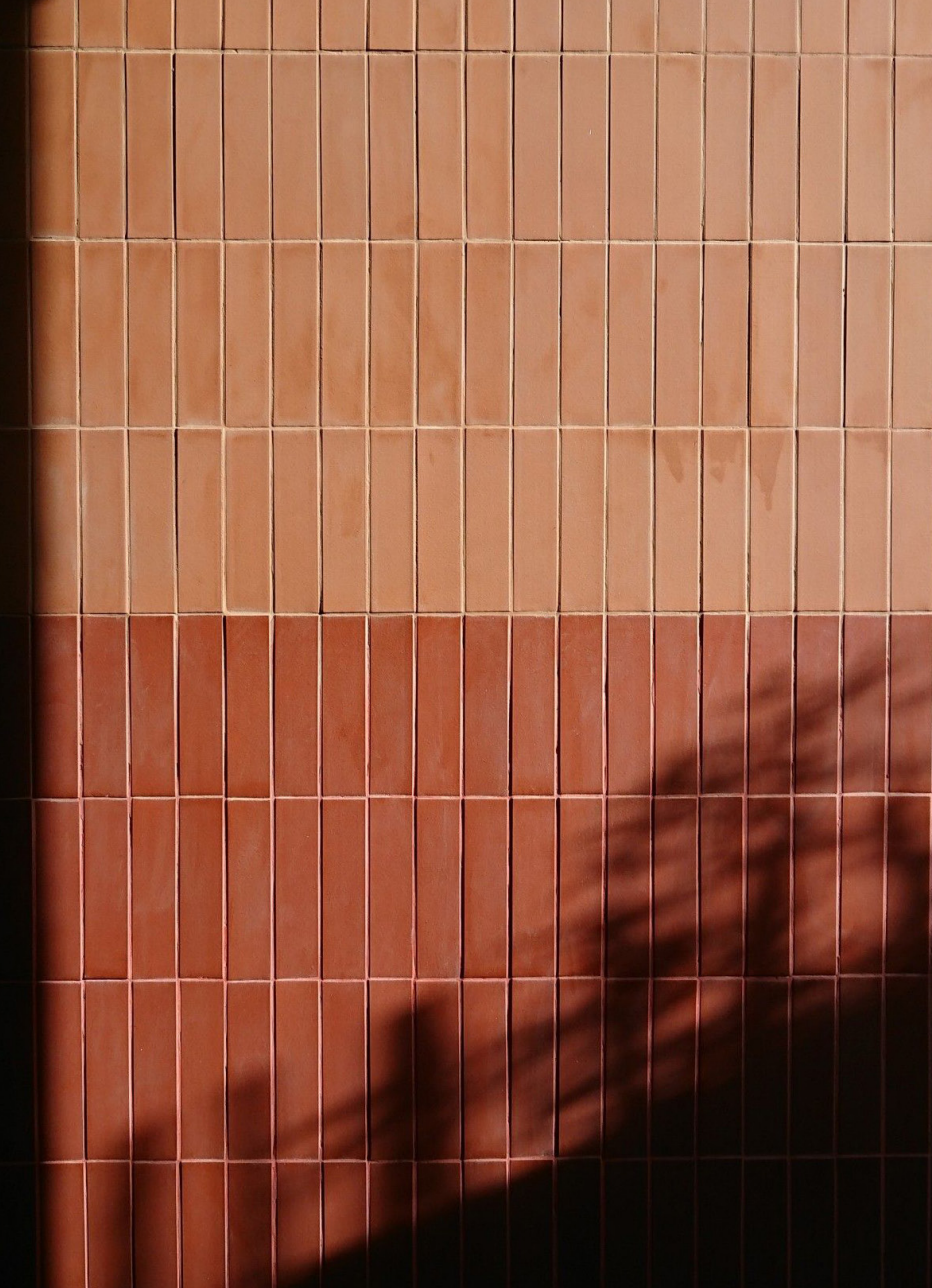

terra

technical data - bricks

properties	test method	value
WATER ABSORPTION	ISO 10545-3	5.75%
BENDING STRENGTH	ISO 10545-4	27.78 MPa
IMPACT RESISTANCE	ISO 10545-5	0.80
ABRASION RESISTANCE	ISO 10545-6	275 mm ³
RESISTANCE TO FROST	ISO 10545-12	>100
MOISTURE EXPANSION	ISO 10545-10	0.22 mm/m
SURFACE SCRATCH HARDNESS	-	6 Mohs

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

- Sealing is required prior and post grouting for all sizes.
- Dark grout colours are not recommended.
- Minimum 10mm grout joints are recommended