



skheme®

aeris

# aeris



white




pearl



tawn



argent

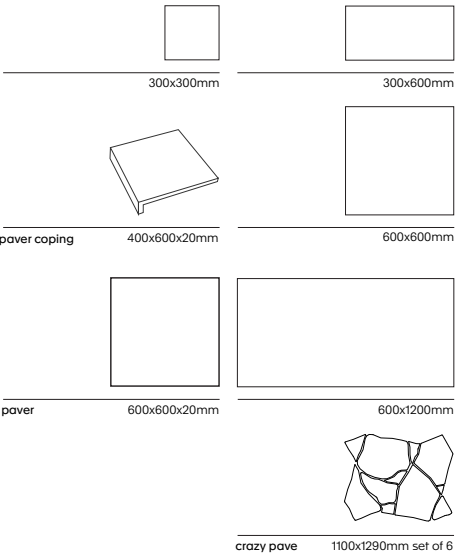

sustainable



crazy pave



paver



pool safe



outdoor



P3 slip rating



P5 slip rating



V2

| PRODUCT SPECIFICATIONS | format           | size        | finish      | thickness | slip rating | colour                |
|------------------------|------------------|-------------|-------------|-----------|-------------|-----------------------|
|                        | tile             | 300x300mm   | matt        | 9mm       | P3          | all colours           |
|                        | tile             | 300x600mm   | matt        | 9mm       | P3          | all colours           |
|                        | tile             | 600x600mm   | matt   grip | 9mm       | P3   P5     | all colours           |
|                        | tile             | 600x1200mm  | matt        | 9mm       | P3          | all colours           |
|                        | paver            | 600x600mm   | grip        | 20mm      | P5          | pearl   tawn   argent |
|                        | paver coping     | 400x600mm   | grip        | 20mm      | P5          | pearl   tawn   argent |
|                        | crazy pave       | 1100x1290mm | matt   grip | 9mm       | P3   P5     | pearl   tawn   argent |
| MATERIAL               | glazed porcelain |             |             |           |             |                       |
| VARIATION              | V2               |             |             |           |             |                       |
| TILE EDGE              | rectified        |             |             |           |             |                       |

Colours shown in images may differ due to variations in photographic conditions and screen displays. Samples provided may not accurately reflect the exact shade or batch supplied, as variation is an inherent property of tiles and stone. Listed sizes and thicknesses are nominal and may vary slightly from actual working dimensions.

left pictured: pearl  
right pictured: pearl



left pictured: tawn crazy pave  
right pictured: white





left pictured: argent crazy pave  
right pictured: argent





monolithic paver coping  
400x600x20mm

One-piece monolithic seamless  
drop edge porcelain paver



pearl coping



tawn coping




argent coping

pictured: pearl paver coping



The Crazy Pave is supplied in a set of six interlocking sheets. Each sheet is approximately sized at around 480x590mm. Together they cover a surface area 1.42 m<sup>2</sup> (overall set size is 1100x1290mm).

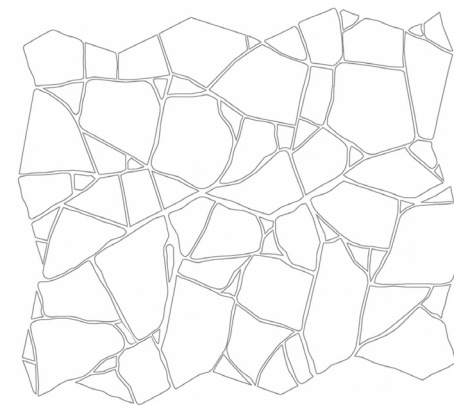

---

crazy pave

1100x1290mm set

# technical data - tile

| properties              | test method  | prescribed value                          | value     |
|-------------------------|--------------|-------------------------------------------|-----------|
| WATER ABSORPTION        | ISO 10545-3  | E<0.5%                                    | 0.08%     |
| BENDING STRENGTH        | ISO 10545-4  | ≥12 MPa                                   | ≥33.5 MPa |
| BREAKING STRENGTH       | ISO 10545-4  | ≥1300 N                                   | 2573 N    |
| ABRASION RESISTANCE     | ISO 10545-7  | Report abrasion class                     | Pass      |
| RESISTANCE TO CHEMICALS | ISO 10545-13 | Household chemicals & swimming pool salts | GA        |
|                         |              | Low concentration of acids & alkalis      | GLA       |
| RESISTANCE TO STAINING  | ISO 10545-14 | Minimum class 3                           | Class 5   |

**IMPORTANT** The installer shall ensure that all porcelain pavers and coping are installed in accordance with the applicable Australian Standards and the adhesive manufacturer's instructions.

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



ISO 14001:2015 specifies the requirements for an environmental management system that an organization can use to enhance its environmental performance. It intended for use by an organization seeking to manage its environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability.



Global GreenTag is an internationally recognised certification program that independently assesses building products for their environmental, health and sustainability performance. It provides assurance that products meet rigorous standards and supports informed, environmentally responsible product selection.




The information provided in this Technical Data Sheet is given in good faith and reflects current knowledge and experience. It is intended as a general guide and may be updated without notice. Users are responsible for ensuring the product's suitability for their specific application and for compliance with all relevant local building codes, Australian Standards, and regulations. This information is offered for guidance purposes only and does not constitute any representation or warranty, express or implied. Any applicable warranties are governed solely by the terms and conditions of sale and relevant statutory requirements under Australian Consumer Law.

**IMPORTANT NOTE:** When installing Aeris Paver Coping tile, the underside and 16mm drop edge must be adhered to the substrate.

When applying full adhesion to paver coping drop edge, it is essential to ensure proper surface preparation, including cleaning and drying the surfaces to be bonded. The installer shall ensure that all porcelain pavers and coping are installed in accordance with the applicable Australian Standards and the adhesive manufacturer's instructions. The adhesive used should be appropriate for the materials being bonded and should be applied according to the manufacturer's instructions. Full adhesion can provide a strong and durable bond between the coping pavers and the substrate.

Paver coping is not suggested for fiberglass pools due to potential issues with flexibility, weight, compatibility, and installation challenges.

Monolithic Paver Coping Drop Edge

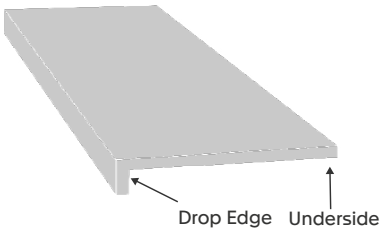

## technical data - paver

| properties              | test method                                                                                                                                                                        | prescribed value                          | value   |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|---------|
| WATER ABSORPTION        | ISO 10545-3                                                                                                                                                                        | E<0.5%                                    | 0.04%   |
| BENDING STRENGTH        | ISO 10545-4                                                                                                                                                                        | Minimum 35                                | 45.60   |
| BREAKING STRENGTH       | ISO 10545-4                                                                                                                                                                        | ≥1300 N                                   | 11427   |
| ABRASION RESISTANCE     | ISO 10545-7                                                                                                                                                                        | Report abrasion class                     | Pass    |
| RESISTANCE TO CHEMICALS | ISO 10545-13                                                                                                                                                                       | Household chemicals & swimming pool salts | GA      |
|                         |                                                                                                                                                                                    | Low concentration of acids & alkalis      | GLA     |
| RESISTANCE TO STAINING  | ISO 10545-14                                                                                                                                                                       | Minimum class 3                           | Class 5 |
| IMPORTANT               | The installer shall ensure that all porcelain pavers and coping are installed in accordance with the applicable Australian Standards and the adhesive manufacturer's instructions. |                                           |         |

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



ISO 14001:2015 specifies the requirements for an environmental management system that an organization can use to enhance its environmental performance. It intended for use by an organization seeking to manage its environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability.



Global GreenTag is an internationally recognised certification program that independently assesses building products for their environmental, health and sustainability performance. It provides assurance that products meet rigorous standards and supports informed, environmentally responsible product selection.



The information provided in this Technical Data Sheet is given in good faith and reflects current knowledge and experience. It is intended as a general guide and may be updated without notice. Users are responsible for ensuring the product's suitability for their specific application and for compliance with all relevant local building codes, Australian Standards, and regulations. This information is offered for guidance purposes only and does not constitute any representation or warranty, express or implied. Any applicable warranties are governed solely by the terms and conditions of sale and relevant statutory requirements under Australian Consumer Law.