

skheme®



flute

flute



carrara orb




carrara slat



*lloret slat - special order only



carrara pitch

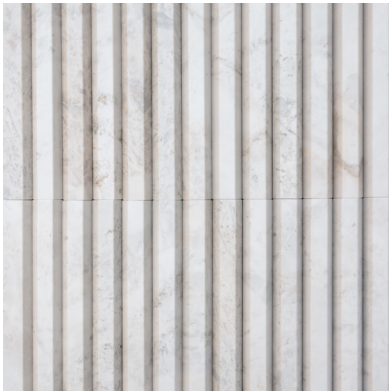

epoca pitch



40x450mm



natural stone



3D format



wall only



V4

PRODUCT SPECIFICATIONS						
format	size	finish	thickness	slip rating	colour	
orb	40x450mm	honed	35mm	N/A	carrara	
pitch	40x450mm	honed	32mm	N/A	carrara epoca	
slat	40x450mm	honed	30mm	N/A	carrara lloret*	
MATERIAL					natural stone	
VARIATION					N/A	
TILE EDGE					rectified	

* lloret – special order only, allow 10-14 weeks lead-time

Colours shown in images may differ due to variations in photographic conditions and screen displays. Samples provided may not accurately reflect the exact shade or batch supplied, as variation is an inherent property of tiles and stone. Listed sizes and thicknesses are nominal and may vary slightly from actual working dimensions.

left pictured: epoca pitch
right pictured: carrara orb



flute



technical information

carrara

properties	value
DENSITY	2699 kg/mc
COMPRESSIVE STRENGTH	130 MPa
FLEXURAL STRENGTH	22 MPa
OPEN POROSITY	0.7%
WATER ABSORPTION	0.2%
FROST RESISTANCE	Partly
IMPORTANT	FLUTE is a decorative design element for vertical surfaces only and should be handled with care. The product should be supported on both ends, preferably carried vertically once removed from the box. Installation should be completed on a non-moisture sensitive substrate, using a fast setting adhesive, stone friendly grout and silicones. Upon installation, the stone should be sealed with appropriate stone sealer, prior and after grouting.

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

flute



technical information

lloret

properties	value
DENSITY	2770 kg/mc
COMPRESSIVE STRENGTH	161 MPa
FLEXURAL STRENGTH	7.5 MPa
WATER ABSORPTION	1%
FROST RESISTANCE	Partly
IMPORTANT	FLUTE is a decorative design element for vertical surfaces only and should be handled with care. The product should be supported on both ends, preferably carried vertically once removed from the box. Installation should be completed on a non-moisture sensitive substrate, using a fast setting adhesive, stone friendly grout and silicones. Upon installation, the stone should be sealed with appropriate stone sealer, prior and after grouting.

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

flute



technical information

epoca

properties	value
DENSITY	2871 kg/mc
COMPRESSIVE STRENGTH	237 MPa
FLEXURAL STRENGTH	15.75 MPa
OPEN POROSITY	0.62%
WATER ABSORPTION	0.24%
IMPORTANT	FLUTE is a decorative design element for vertical surfaces only and should be handled with care. The product should be supported on both ends, preferably carried vertically once removed from the box. Installation should be completed on a non-moisture sensitive substrate, using a fast setting adhesive, stone friendly grout and silicones. Upon installation, the stone should be sealed with appropriate stone sealer, prior and after grouting.

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.