

skheme®

new york



new york



white




taupe



pale grey



charcoal

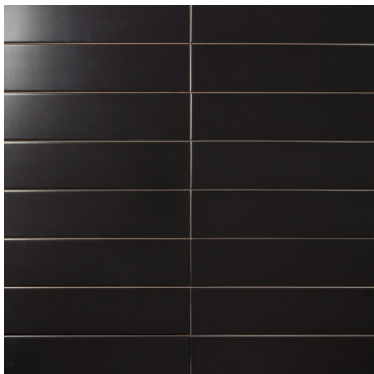

black



75x300mm



indoor



wall only



V1

PRODUCT SPECIFICATIONS	format	size	finish	thickness	slip rating	colour
	brick	75x300mm	matt	7mm	N/A	all colours
	brick	75x300mm	gloss	7mm	N/A	white taupe pale grey black
MATERIAL	ceramic					
VARIATION	V1					
TILE EDGE	non-rectified					

Colours shown in images may differ due to variations in photographic conditions and screen displays. Samples provided may not accurately reflect the exact shade or batch supplied, as variation is an inherent property of tiles and stone. Listed sizes and thicknesses are nominal and may vary slightly from actual working dimensions.

left pictured: white
right pictured: charcoal





left pictured: charcoal
right pictured: white

Barrys Bootcamp
designed: Schiavello



technical data

properties	test method	value
WATER ABSORPTION	ISO 10545-3	≤10%
MODULAS OF RUPTURE	ISO 10545-4	≥12 N/mm ²
BREAKING STRENGTH	ISO 10545-4	600 N
ABRASION RESISTANCE	ISO 10545-7	Class 3
RESISTANCE TO CHEMICALS	ISO 10545-13	GA/GLA
RESISTANCE TO STAINING	ISO 10545-14	Class 5

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



The information provided in this Technical Data Sheet is given in good faith and reflects current knowledge and experience. It is intended as a general guide and may be updated without notice. Users are responsible for ensuring the product's suitability for their specific application and for compliance with all relevant local building codes, Australian Standards, and regulations. This information is offered for guidance purposes only and does not constitute any representation or warranty, express or implied. Any applicable warranties are governed solely by the terms and conditions of sale and relevant statutory requirements under Australian Consumer Law.