


skheme®


piccolo




piccolo

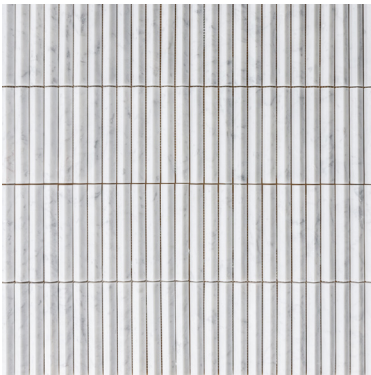

carrara

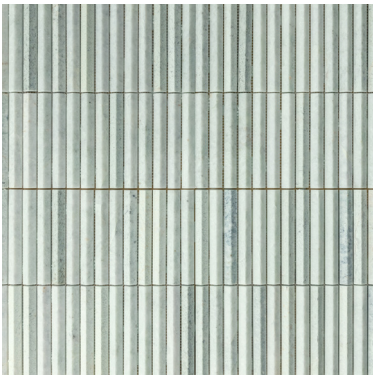


pearl jade

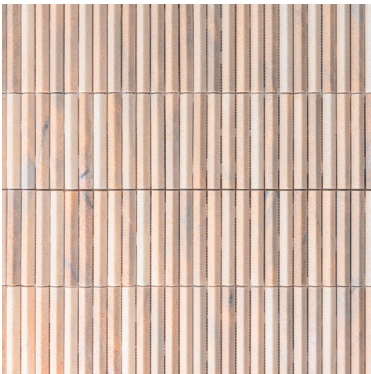

crystal pink



bluestone



mosaic

20x145mm



crazy pave



mosaic



3D format



indoor only



wall only

PRODUCT SPECIFICATIONS					
format	size	finish	thickness	slip rating	colour
mosaic	20x145mm*	honed	13mm	N/A	all colours
MATERIAL					natural stone
VARIATION					N/A
TILE EDGE					rectified

* 20x145mm mosaics are available in a sheet size of 292x306mm

Colours shown in images may differ due to variations in photographic conditions and screen displays. Samples provided may not accurately reflect the exact shade or batch supplied, as variation is an inherent property of tiles and stone. Listed sizes and thicknesses are nominal and may vary slightly from actual working dimensions.

left pictured: crystal pink
right pictured: carrara



Milsons Point Residence
designed: Zoe Phillips Residential
photography: Pablo Veiga



pictured: carrara



piccolo



technical information

carrara

properties	value
DENSITY	2699 kg/mc
COMPRESSIVE STRENGTH	130 MPa
FLEXURAL STRENGTH	22 MPa
OPEN POROSITY	0.7%
WATER ABSORPTION	0.2%
FROST RESISTANCE	Partly
IMPORTANT	PICCOLO is a decorative design element for vertical surfaces only and should be handled with care. Installation should be completed on a non-moisture sensitive substrate, using a fast setting adhesive, stone friendly grout and silicones. Upon installation, the stone should be sealed with appropriate stone sealer, prior and after grouting.

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

piccolo



technical information

pearl jade

properties	test method	value
WATER ABSORPTION	UNE EN 13755	0.40%
FLEXURAL STRENGTH	UNE EN 12372	14 MPa
IMPACT RESISTANCE	UNE EN 14158	49 cm
BULK DENSITY	UNE EN 1936	2.68 g/cm ³
COMPRESSIVE STRENGTH	UNE EN 1926	142.7 MPa
IMPORTANT	PICCOLO is a decorative design element for vertical surfaces only and should be handled with care. Installation should be completed on a non-moisture sensitive substrate, using a fast setting adhesive, stone friendly grout and silicones. Upon installation, the stone should be sealed with appropriate stone sealer, prior and after grouting.	

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

piccolo




technical information

crystal pink

properties	value
COMPRESSIVE TENSILE STRENGTH	974 kg/cm ²
UNIT BENDING TENSILE STRENGTH	134 kg/cm ²
WATER IMBIBITION COEFFICIENT	0.05%
IMPACT RESISTANCE MINIMUM DROP HEIGHT	50 cm
WEIGHT PER UNIT VOLUME	2730 kg/m ³
IMPORTANT	PICCOLO is a decorative design element for vertical surfaces only and should be handled with care. Installation should be completed on a non-moisture sensitive substrate, using a fast setting adhesive, stone friendly grout and silicones. Upon installation, the stone should be sealed with appropriate stone sealer, prior and after grouting.

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

piccolo

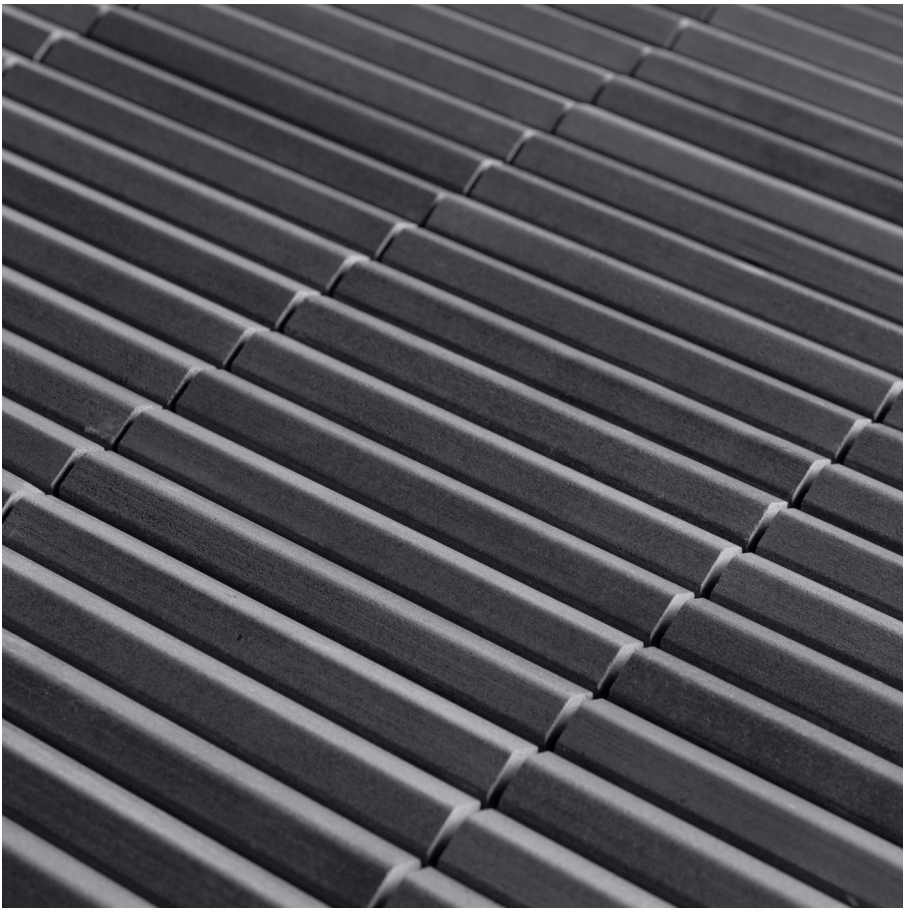

technical information

bluestone

properties	test method	value
ABRASION STRENGTH (CM ³ /50CM ²)	EN 1341	15.71
BULK DENSITY (KG/M ³)	EN 1936	2593
COMPRESSIVE STRENGTH	EN 1926	107
FLEXURAL STRENGTH UNDER LOAD	EN 12372	9.8
OPEN POROSITY	EN 1936	3.15%
IMPORTANT	PICCOLO is a decorative design element for vertical surfaces only and should be handled with care. Installation should be completed on a non-moisture sensitive substrate, using a fast setting adhesive, stone friendly grout and silicones. Upon installation, the stone should be sealed with appropriate stone sealer, prior and after grouting.	

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.