

skheme®


t2



t2



vintage

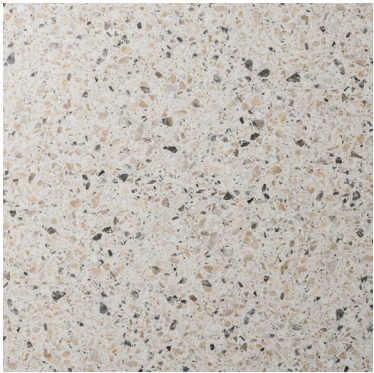

parchment




shale




steel



flint

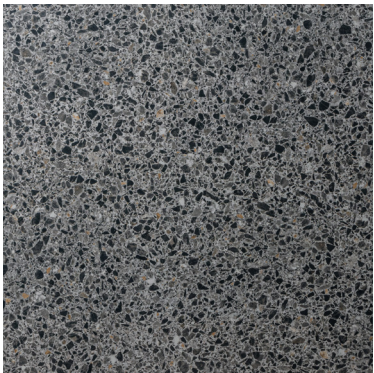

shadow

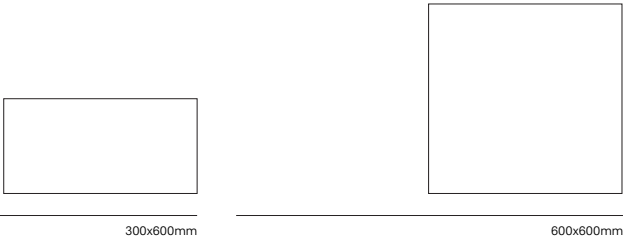

sustainable



outdoor



P3 slip rating



P5 slip rating



V2

PRODUCT SPECIFICATIONS	format	size	finish	thickness	slip rating	colour
	tile	300x600mm	matt	10mm	P3	all colours
	tile	600x600mm	matt	10mm	P3	all colours
	tile	300x600mm	grip	10mm	P5	parchment flint shadow
	tile	600x600mm	grip	10mm	P5	shale steel
MATERIAL	glazed porcelain					
VARIATION	V2					
TILE EDGE	rectified					

Colours shown in images may differ due to variations in photographic conditions and screen displays. Samples provided may not accurately reflect the exact shade or batch supplied, as variation is an inherent property of tiles and stone. Listed sizes and thicknesses are nominal and may vary slightly from actual working dimensions.

left pictured: steel
right pictured: parchment



Marcel Restaurant, Pullman Hotel Penrith Sydney
designed: Turner Studio
photography: Tom Ferguson



JJ's Waste and Recycling
designed: Crest Interiors

left pictured: vintage
right pictured: flint



technical data

properties	test method	prescribed value	value
WATER ABSORPTION	ISO 10545-3	≤0.5%	≤0.21%
BENDING STRENGTH	ISO 10545-4	≥12 MPa	≥33.5 MPa
BREAKING STRENGTH	ISO 10545-4	≥350 N	780 N
ABRASION RESISTANCE	ISO 10545-7	Max. 175 mm ³ PEI 1-5	Class 3
RESISTANCE TO CHEMICALS	ISO 10545-13	Household chemicals & swimming pool salts	GA
		Low concentration of acids & alkalis	GLA
RESISTANCE TO STAINING	ISO 10545-14	Minimum class 3	Class 5

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



Western Sydney Convention Centre
designed: Turner Architects
photography: Tom Ferguson