

skheme®



tiber

tibet



pearl




gris



greige



grafito

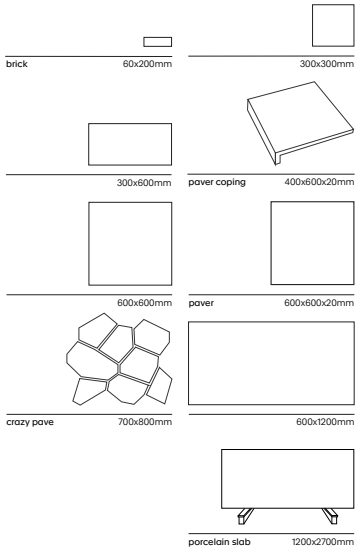

sustainable



paver



slab available



P3 slip rating



P4 slip rating



P5 slip rating



V3

PRODUCT SPECIFICATIONS	format	size	finish	thickness	slip rating	colour
	brick	60x200mm	matt	10mm	P3	all colours
	tile	300x300mm	matt	10mm	P3	all colours
	tile	300x600mm	matt grip	10mm	P3 P5	all colours
	tile	600x600mm	matt grip	10mm	P3 P5	all colours
	tile	600x1200mm	matt	10mm	P2	pearl gris
	paver	600x600mm	grip	20mm	P5	all colours
	paver coping	400x600mm	grip	20mm	P5	all colours
	crazy pave	700x800mm	matt grip	10mm	P3 P5	pearl greige
	slab	1200x2700mm	matt	6mm	N/A	pearl
MATERIAL	glazed porcelain					
VARIATION	V3					
TILE EDGE	rectified					

Colours shown in images may differ due to variations in photographic conditions and screen displays. Samples provided may not accurately reflect the exact shade or batch supplied, as variation is an inherent property of tiles and stone. Listed sizes and thicknesses are nominal and may vary slightly from actual working dimensions.

pictured: grafito

Haco Restaurant
designed: 24/7 Interiors & Construction





Kyah Hotel Blue Mountains
designed: mkd architects

left pictured: greige crazy pave
right pictured: greige



pictured: pearl

Albert St Leichhardt
photography: Studio Hill Photography



technical data - tiles

properties	test method	prescribed value	value
WATER ABSORPTION	ISO 10545-3	≤0.5%	≤0.1%
BENDING STRENGTH	ISO 10545-4	≥12 MPa	≥33.5 MPa
BREAKING STRENGTH	ISO 10545-4	≥350 N	1785 N
ABRASION RESISTANCE	ISO 10545-7	Max. 175 mm ³ PEI 1-5	Class 3
RESISTANCE TO CHEMICALS	ISO 10545-13	Household chemicals & swimming pool salts	GA
		Low concentration of acids & alkalis	GLA
RESISTANCE TO STAINING	ISO 10545-14	Minimum class 3	Class 5

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



ISO 14001:2015 specifies the requirements for an environmental management system that an organization can use to enhance its environmental performance. It is intended for use by an organization seeking to manage its environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability.



AN ENVIRONMENTAL PRODUCT DECLARATION (EPD) is a globally recognised certification that outlines the environmental impact of a product across its entire life cycle. It supports sustainable decision-making and green procurement by assessing factors such as material sourcing, emissions, installation, use, and end-of-life disposal.




The information provided in this Technical Data Sheet is given in good faith and reflects current knowledge and experience. It is intended as a general guide and may be updated without notice. Users are responsible for ensuring the product's suitability for their specific application and for compliance with all relevant local building codes, Australian Standards, and regulations. This information is offered for guidance purposes only and does not constitute any representation or warranty, express or implied. Any applicable warranties are governed solely by the terms and conditions of sale and relevant statutory requirements under Australian Consumer Law.

IMPORTANT: When installing Tibet Paver Coping Drop Edge tile, the underside and 20mm drop edge must be adhered to the substrate.

When applying full adhesion to paver coping drop edge, it is essential to ensure proper surface preparation, including cleaning and drying the surfaces to be bonded. The installer shall ensure that all porcelain pavers and coping are installed in accordance with the applicable Australian Standards and the adhesive manufacturer's instructions. The adhesive used should be appropriate for the materials being bonded and should be applied according to the manufacturer's instructions. Full adhesion can provide a strong and durable bond between the coping pavers and the substrate.

Paver coping is not suggested for fiberglass pools due to potential issues with flexibility, weight, compatibility, and installation challenges.

Tibet Paver Coping Drop Edge

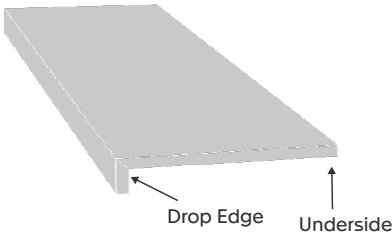

technical data - paver

properties	test method	prescribed value	value
WATER ABSORPTION	ISO 10545-3	≤0.5%	≤0.1%
BENDING STRENGTH	ISO 10545-4	≥12 MPa	≥33.5 MPa
BREAKING STRENGTH	ISO 10545-4	≥1300 N	11427
ABRASION RESISTANCE	ISO 10545-7	Max. 175 mm³ PEI 1-5	Pass
RESISTANCE TO CHEMICALS	ISO 10545-13	Household chemicals & swimming pool salts	GA
		Low concentration of acids & alkalis	GLA
RESISTANCE TO STAINING	ISO 10545-14	Minimum class 3	Class 5
IMPORTANT	The installer shall ensure that all porcelain pavers and coping are installed in accordance with the applicable Australian Standards and the adhesive manufacturer's instructions.		

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



ISO 14001:2015 specifies the requirements for an environmental management system that an organization can use to enhance its environmental performance. It is intended for use by an organization seeking to manage its environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability.



AN ENVIRONMENTAL PRODUCT DECLARATION (EPD) is a globally recognised certification that outlines the environmental impact of a product across its entire life cycle. It supports sustainable decision-making and green procurement by assessing factors such as material sourcing, emissions, installation, use, and end-of-life disposal.



The information provided in this Technical Data Sheet is given in good faith and reflects current knowledge and experience. It is intended as a general guide and may be updated without notice. Users are responsible for ensuring the product's suitability for their specific application and for compliance with all relevant local building codes, Australian Standards, and regulations. This information is offered for guidance purposes only and does not constitute any representation or warranty, express or implied. Any applicable warranties are governed solely by the terms and conditions of sale and relevant statutory requirements under Australian Consumer Law.

skheme®

technical data - 6mm porcelain

properties	test method	prescribed value	value
WATER ABSORPTION	ISO 10545-3	≤0.5%	0.05
MODULUS OF RUPTURE	ISO 10545-4	Individual min. 45 MPa	53 MPa
BREAKING STRENGTH	ISO 10545-4	≥800	12010 N
ABRASION RESISTANCE	ISO 10545-7	Min. class 3 &750 cycles)	Class 4
RESISTANCE TO CHEMICALS	ISO 10545-13	Household chemicals & swimming pool salts	GA
		Low concentration of acids & alkalis	GLA
RESISTANCE TO STAINING	ISO 10545-14	Minimum class 3	Class 5
CRAZING RESISTANCE	ISO 10545-13	No cracking or peeling	Pass

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



ISO 14001:2015 specifies the requirements for an environmental management system that an organization can use to enhance its environmental performance. It intended for use by an organization seeking to manage its environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability.

