

skheme®

travestone vein



travestone vein




pearl



cream



argent

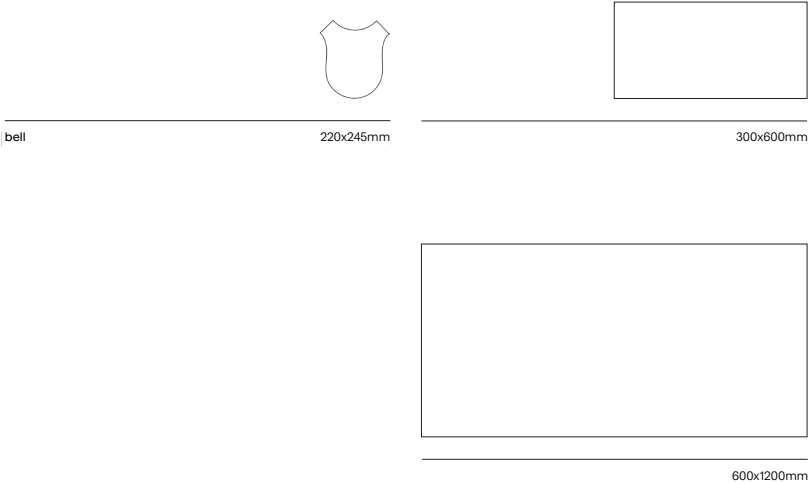

sustainable



outdoor



P3 slip rating



P5 slip rating



V2

PRODUCT SPECIFICATIONS	format	size	finish	thickness	slip rating	colour
	bell	220x245mm	matt	10mm	P3	all colours
	tile	300x600mm	matt	10mm	P3	all colours
	tile	600x1200mm	matt grip	10mm	P3 P5	all colours
MATERIAL	glazed porcelain					
VARIATION	V2					
TILE EDGE	rectified					

Colours shown in images may differ due to variations in photographic conditions and screen displays. Samples provided may not accurately reflect the exact shade or batch supplied, as variation is an inherent property of tiles and stone. Listed sizes and thicknesses are nominal and may vary slightly from actual working dimensions.



pictured: argent

CapitaLand
designed: Lane Studio
photography: The Photo Republic




pictured: pearl

Virgin Active Bondi Junction
designed: Quattro Architecture
photography: Simon Whitbread





left pictured: cream
right pictured: argent

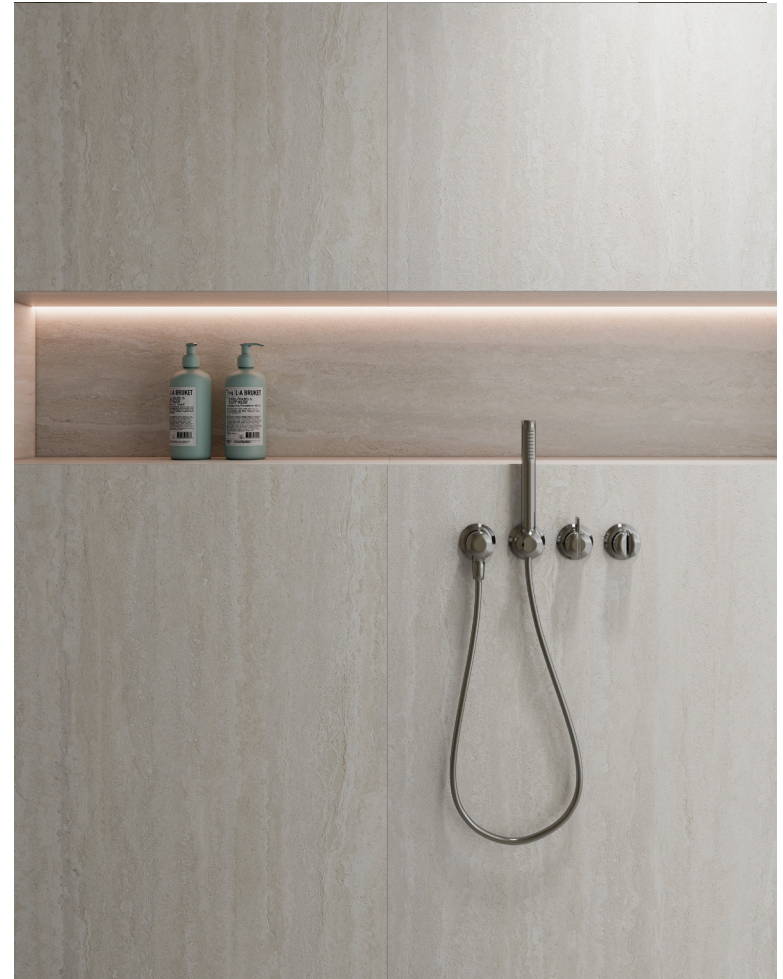

technical data

properties	test method	prescribed value	value
WATER ABSORPTION	ISO 10545-3	≤0.5%	≤0.1%
BENDING STRENGTH	ISO 10545-4	≥12 MPa	≥33.5 MPa
BREAKING STRENGTH	ISO 10545-4	≥350 N	780 N
ABRASION RESISTANCE	ISO 10545-7	Max. 175 mm³ PEI 1-5	Class 3
RESISTANCE TO CHEMICALS	ISO 10545-13	Household chemicals & swimming pool salts	GA
		Low concentration of acids & alkalis	GLA
RESISTANCE TO STAINING	ISO 10545-14	Minimum class 3	Class 5

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



ISO 14001:2015 specifies the requirements for an environmental management system that an organization can use to enhance its environmental performance. It is intended for use by an organization seeking to manage its environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability.



AN ENVIRONMENTAL PRODUCT DECLARATION (EPD) is a globally recognised certification that outlines the environmental impact of a product across its entire life cycle. It supports sustainable decision-making and green procurement by assessing factors such as material sourcing, emissions, installation, use, and end-of-life disposal.

