skheme®



aspley


aspley



pearl




tawn

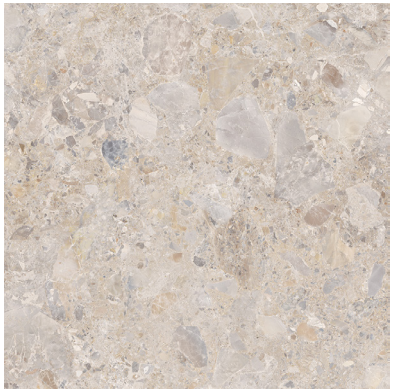

greige




gris

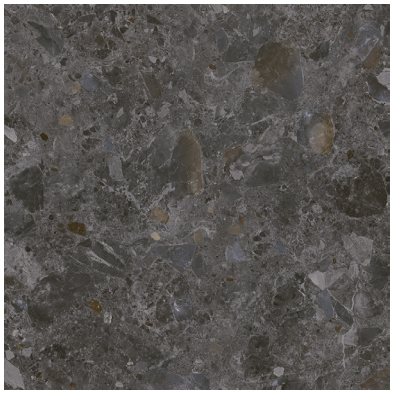


grafito




300x300mm



300x600mm




600x600mm



paver 600x600x20mm



600x1200mm



porcelain slab 1200x2700mm

sustainable | slab available | outdoor only | paver | P2 slip rating | P3 slip rating | P5 slip rating | V2

PRODUCT SPECIFICATIONS	format	size	finish	thickness	slip rating	colour
	tile	300x300mm	matt	10mm	P3	all colours
	tile	300x600mm	matt | grip	10mm	P3 | P5	all colours
	tile	600x600mm	matt | grip	10mm	P3 | P5	all colours
	paver	600x600mm	grip	20mm	P5	all colours
	tile	600x1200mm	matt	10mm	P2	all colours
	slab	1200x2700mm	matt	6mm	P2	pearl | greige | gris

MATERIAL	glazed porcelain
VARIATION	V2
TILE EDGE	rectified

Colours shown in images may differ due to variations in photographic conditions and screen displays. Samples provided may not accurately reflect the exact shade or batch supplied, as variation is an inherent property of tiles and stone. Listed sizes and thicknesses are nominal and may vary slightly from actual working dimensions.

pictured: gris

Kogi Korean BBQ
designed: Studio Hiyaku
photography: Studio Hiyaku








Aje Head Office
designed: Wool & Hay
photography: Richard Whitbread

left pictured: **greige**
right pictured: **greige**

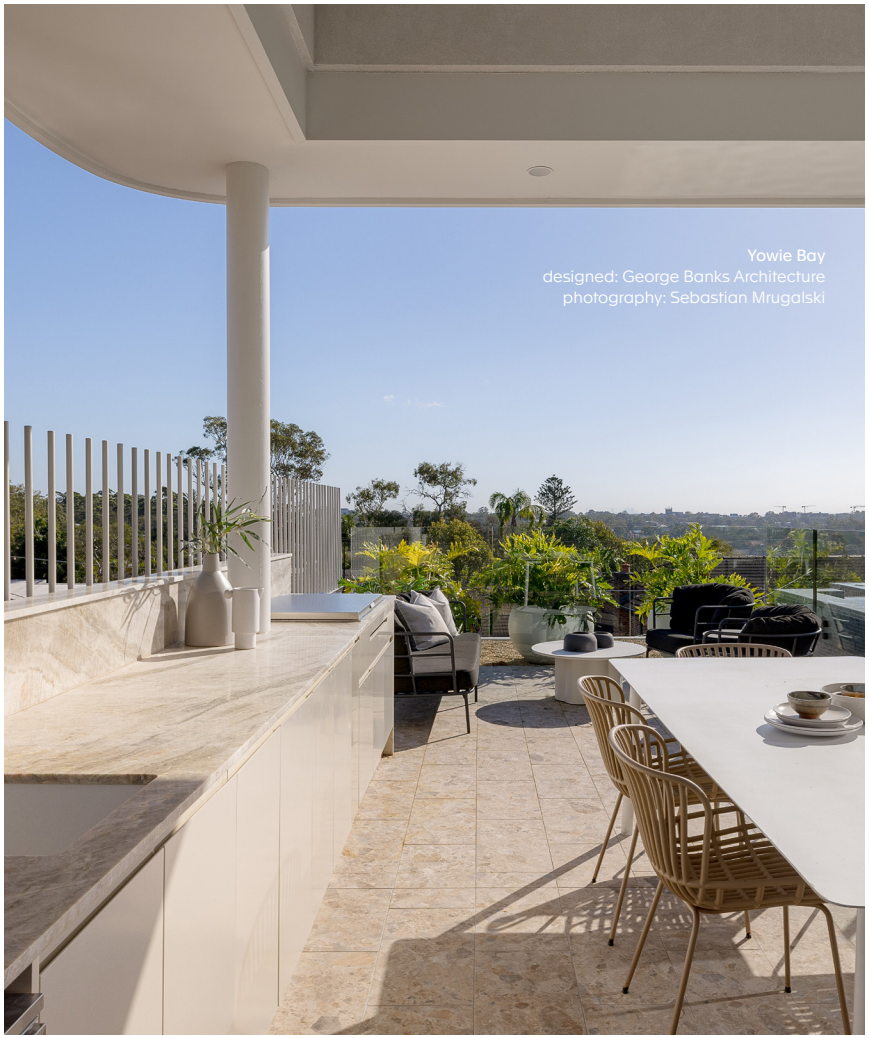

Yowie Bay
designed: George Banks Architecture
photography: Sebastian Mrugalski

Highforest Display
designed: Mirvac

pictured: pearl

Level 40 One International Towers Barangaroo
designed: Alkimi Studio
photography: Pixel Collective



technical data - tile

properties	test method	prescribed value	value
WATER ABSORPTION	ISO 10545-3	E<0.5%	0.08%
BENDING STRENGTH	ISO 10545-4	≥12 MPa	≥33.5 MPa
BREAKING STRENGTH	ISO 10545-4	≥1300 N	2573 N
ABRASION RESISTANCE	ISO 10545-7	Report abrasion class	Pass
RESISTANCE TO CHEMICALS	ISO 10545-13	Household chemicals & swimming pool salts	GA
		Low concentration of acids & alkalis	GLA
RESISTANCE TO STAINING	ISO 10545-14	Minimum class 3	Class 5

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

ISO 14001:2015 specifies the requirements for an environmental management system that an organization can use to enhance its environmental performance. It intended for use by an organization seeking to manage its environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability.

AN ENVIRONMENTAL PRODUCT DECLARATION (EPD) is a globally recognised certification that outlines the environmental impact of a product across its entire life cycle. It supports sustainable decision-making and green procurement by assessing factors such as material sourcing, emissions, installation, use, and end-of-life disposal.



Kogi Korean BBQ
designed: Studio Hiyaku
photography: Studio Hiyaku

The information provided in this Technical Data Sheet is given in good faith and reflects current knowledge and experience. It is intended as a general guide and may be updated without notice. Users are responsible for ensuring the product's suitability for their specific application and for compliance with all relevant local building codes, Australian Standards, and regulations. This information is offered for guidance purposes only and does not constitute any representation or warranty, express or implied. Any applicable warranties are governed solely by the terms and conditions of sale and relevant statutory requirements under Australian Consumer Law.

skheme®

technical data - paver

properties	test method	prescribed value	value
WATER ABSORPTION	ISO 10545-3	E<0.5%	0.04%
BENDING STRENGTH	ISO 10545-4	Minimum 35	45.60
BREAKING STRENGTH	ISO 10545-4	≥1300 N	11427
ABRASION RESISTANCE	ISO 10545-7	Report abrasion class	Pass
RESISTANCE TO CHEMICALS	ISO 10545-13	Household chemicals & swimming pool salts	GA
		Low concentration of acids & alkalis	GLA
RESISTANCE TO STAINING	ISO 10545-14	Minimum class 3	Class 5
IMPORTANT	The installer shall ensure that all porcelain pavers and coping are installed in accordance with the applicable Australian Standards and the adhesive manufacturer's instructions.		

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

ISO 14001:2015 specifies the requirements for an environmental management system that an organization can use to enhance its environmental performance. It intended for use by an organization seeking to manage its environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability.

AN ENVIRONMENTAL PRODUCT DECLARATION (EPD) is a globally recognised certification that outlines the environmental impact of a product across its entire life cycle. It supports sustainable decision-making and green procurement by assessing factors such as material sourcing, emissions, installation, use, and end-of-life disposal.



The information provided in this Technical Data Sheet is given in good faith and reflects current knowledge and experience. It is intended as a general guide and may be updated without notice. Users are responsible for ensuring the product's suitability for their specific application and for compliance with all relevant local building codes, Australian Standards, and regulations. This information is offered for guidance purposes only and does not constitute any representation or warranty, express or implied. Any applicable warranties are governed solely by the terms and conditions of sale and relevant statutory requirements under Australian Consumer Law.

skheme®

technical data - 6mm porcelain

properties	test method	prescribed value	value
WATER ABSORPTION	ISO 10545-3	≤0.5%	0.05
MODULUS OF RUPTURE	ISO 10545-4	Individual min. 45 MPa	53 MPa
BREAKING STRENGTH	ISO 10545-4	≥800	12010 N
ABRASION RESISTANCE	ISO 10545-7	Min. class 3 (750 cycles)	Class 4
RESISTANCE TO CHEMICALS	ISO 10545-13	Household chemicals & swimming pool salts	GA
		Low concentration of acids & alkalis	GLA
RESISTANCE TO STAINING	ISO 10545-14	Minimum class 3	Class 5
CRAZING RESISTANCE	ISO 10545-13	No cracking or peeling	Pass

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

ISO 14001:2015 specifies the requirements for an environmental management system that an organization can use to enhance its environmental performance. It intended for use by an organization seeking to manage its environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability.



The information provided in this Technical Data Sheet is given in good faith and reflects current knowledge and experience. It is intended as a general guide and may be updated without notice. Users are responsible for ensuring the product's suitability for their specific application and for compliance with all relevant local building codes, Australian Standards, and regulations. This information is offered for guidance purposes only and does not constitute any representation or warranty, express or implied. Any applicable warranties are governed solely by the terms and conditions of sale and relevant statutory requirements under Australian Consumer Law.

skheme®