# **Alpes Max**



Made in Italy, ALPES MAX Series combines stone, marble and metal textures to create a crossover style ideal for most designs. Their large slab formats allow it to be used in residential and commercial spaces. Available in four colours and two versatile sizes.

PRODUCT TYPE:	Porcelain Slab
COLOURS:	Ivory, Sand, Grey and Lead
SIZES:	1200x1200x7mm and 1200x2400x7mm Rectified edges
FINISHES/USAGE:	Natural/Wall and Floor
AESTHETIC QUALITIES:	Metal and Natural Stone look slabs
TECHNICAL DATA:	The 1200x2400mm format has 6 different faces More information on last page
	Italy

ORIGIN: Italy

VARIATION:




CERTIFICATIONS:





### TECHNICAL QUALITIES

Slim porcelain slabs allowing endless custom design opportunities such as joinery cladding, internal and external facades.

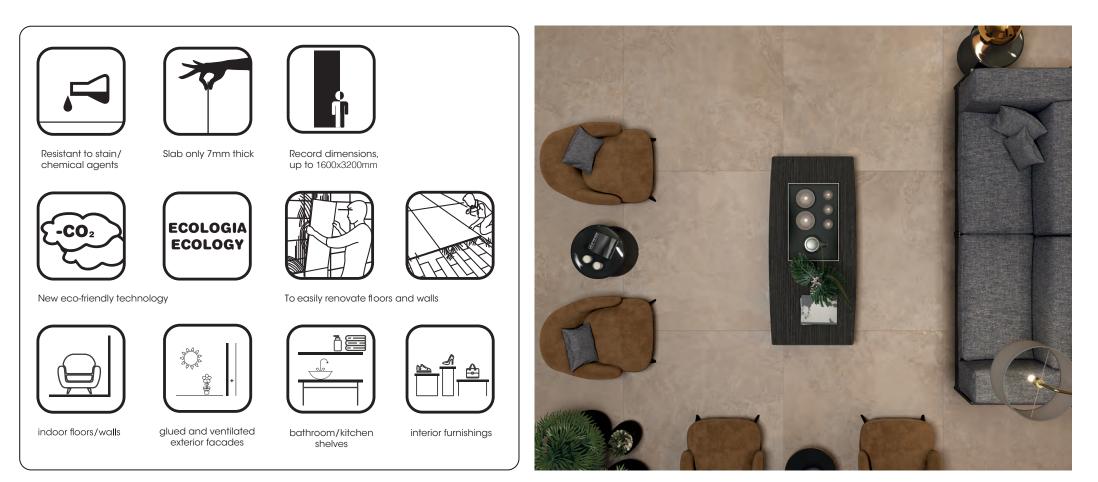


# **Alpes Max**

### PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
1200x1200mm* 1200x2400mm	NATURAL	-	RECTIFIED

\*Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.

### FORMATS



1200x2400x7mm 1200x1200x7mm



LEAD


# **Alpes Max**

### PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
1200x1200mm*	NATURAL	-	RECTIFIED
1200x2400mm*	NATURAL		RECTIFIED

\*Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.

### FORMATS





1200x2400x7mm 1200x1200x7mm



GREY



#### VARIATION - IVORY AND LEAD





#### VARIATION - SAND AND GREY









Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



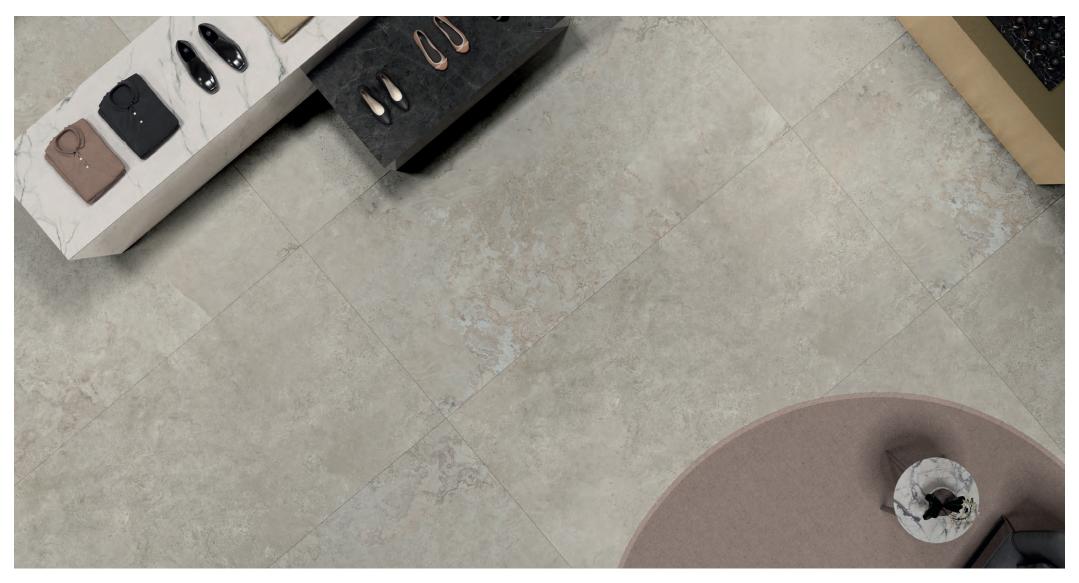



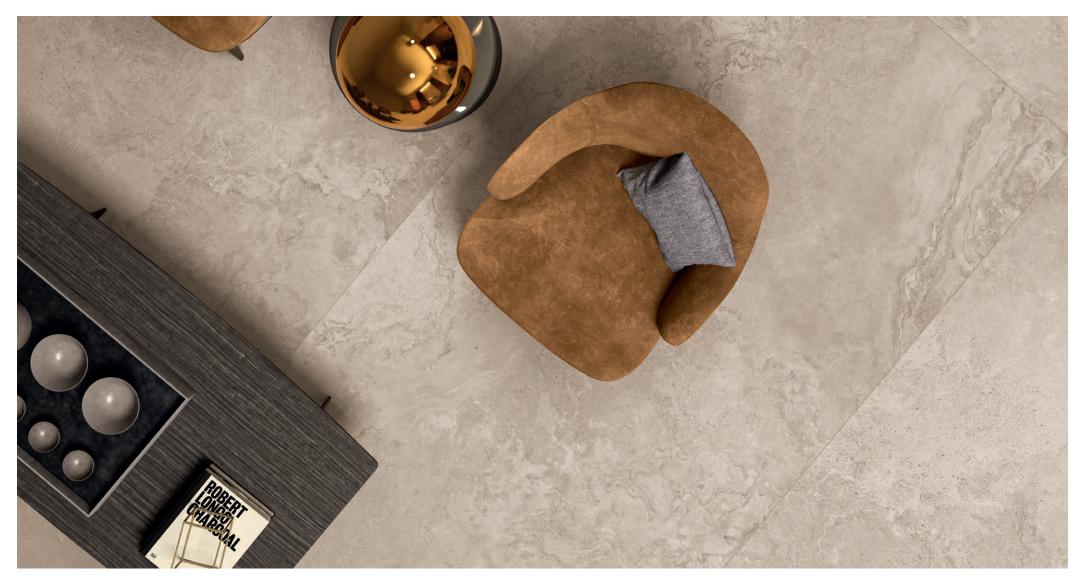

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

# **Alpes Max**

### TECHNICAL DATA

Technical Characteristis	Test Standard	Product Standard	Result
Length and Width	ISO 10545-2+	/-0,6% (+/-2mm)	Complies
Thickness	ISO 10545-2	+/-0,5% (+/-5mm)	Complies
Straightness of sides	ISO 10545-2	+/-0,5% (+/-1,5mm)	Complies
Rectangularity	ISO 10545-2	+/-0,5% (+/-2mm)	Complies
Water Absorption	ISO 10545-3	Eb 0,5%	Eb 0,3%
Breaking Strength	ISO 10545-4	min 1300	>1500
Modulus of Rupture	ISO 10545-4	min 35	45
Warp	ISO 10545-2	Deviation % Max ‡ 0,5	Complies
Thermal Shock	ISO 10545-9	Test method available	Resistant
Frost Resistance	ISO 10545-12	Required	Resistant
Resistance to household chemicals	ISO 10545-13	min GB	min GA

### CERTIFICATIONS



Italian GREEN BUILDING COUNCIL, the association of top players working to transform the building market towards sustainability and to build liveable communities. GBC Italian members promote environmental, economic and social responsibility, innovating buildings in terms of engineering, design, manufacturing and use.



THIS PRODUCT IS

LEED ACCORDANT

LEED (Leadership in Energy and Environmental Design) is an internationally recognized green building certification system, providing third-party verification that a building or community was designed and built using strategies aimed at improving performance across all the metrics that matter most: energy savings, water efficiency, CO2 emissions reduction, improved indoor environmental quality, and stewardship of resources and sensitivity to their impacts.