




Made in Italy, ZOKU MAX is the latest series to offer a metallic surface finish in large format slabs. Available in four colours and three versatile sizes, ZOKU MAX can be used as a decorative solution for floors and walls in commercial and residential spaces, including the exterior facades of buildings.

PRODUCT TYPE:	Porcelain Slab	
COLOURS:	Pale Silver, Silver, Corten and Iron	
SIZES:	1200x1200x7mm,1200x2400x7mm and 1600x3200x6mm Rectified edges	
FINISHES/USAGE:	Natural/Wall and Floor	
STHETIC QUALITIES:	Metal look slabs	
TECHNICAL DATA:	The 1200x2400mm format has 9 different faces. More information on last page	
ORIGIN:	Italy	
VARIATION:	V2	
CERTIFICATIONS:		



TECHNICAL QUALITIES

Slim porcelain slabs allowing endless custom design opportunities such as joinery cladding, internal and external facades.

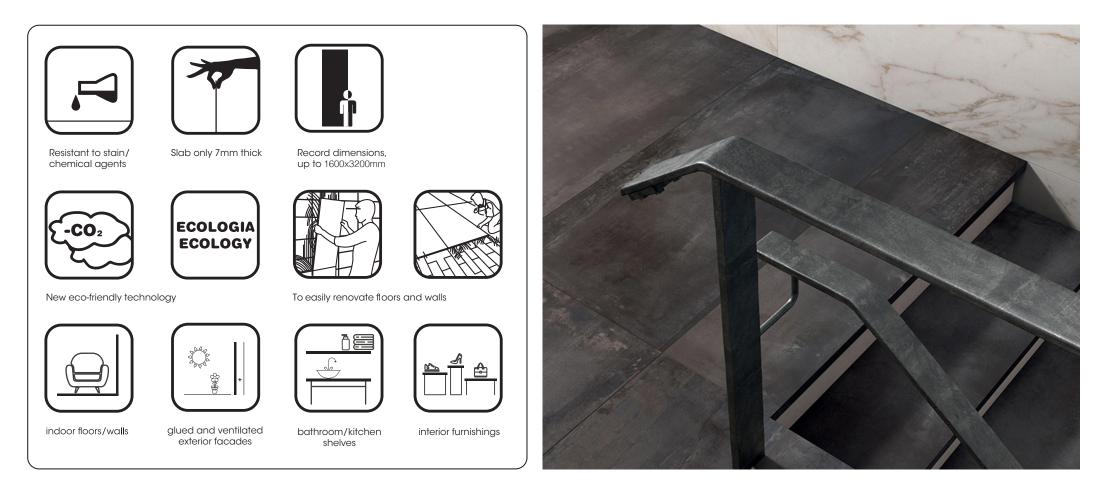

skheme®


Zoku Max

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
1200x1200mm*	NATURAL	-	RECTIFIED
1200x2400mm	NATURAL	-	RECTIFIED
1600x3200mm*	NATURAL	-	RECTIFIED

*Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.

FORMATS

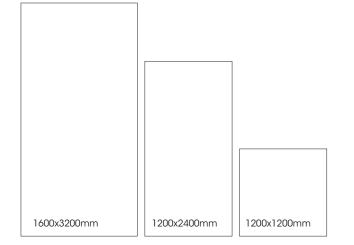



PALE SILVER NATURAL

IRON NATURAL

skheme®


Zoku Max

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
1200x1200mm*	NATURAL	-	RECTIFIED
1200x2400mm*	NATURAL	-	RECTIFIED
1600x3200mm*	NATURAL	-	RECTIFIED

*Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.

FORMATS

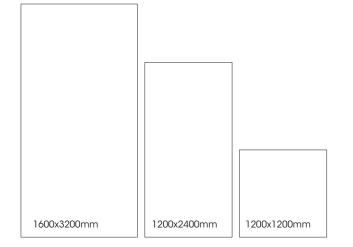



SILVER NATURAL

CORTEN NATURAL

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.





Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.





skheme®

Zoku Max

TECHNICAL DATA

Technica	l Characteristis	Test Standard	Product Standard	Result
Length a	nd Width	ISO 10545-2+	/-0,6% (+/-2mm)	Complies
Thicknes	S	ISO 10545-2	+/-0,5% (+/-5mm)	Complies
Straightn	ess of sides	ISO 10545-2	+/-0,5% (+/-1,5mm)	Complies
Rectang	Ilarity	ISO 10545-2	+/-0,5% (+/-2mm)	Complies
Water Ab	sorption	ISO 10545-3	Eb 0,5%	Eb 0,3%
Breaking	Strength	ISO 10545-4	min 1300	>1500
Modulus	of Rupture	ISO 10545-4	min 35	45
Warp		ISO 10545-2	Deviation % Max \$0,5	Complies
Thermal	Shock	ISO 10545-9	Test method available	Resistant
Frost Res	istance	ISO 10545-12	Required	Resistant
Resistan	ce to household	ISO 10545-13	min GB	min GA

CERTIFICATIONS



Italian GREEN BUILDING COUNCIL, the association of top players working to transform the building market towards sustainability and to build liveable communities. GBC Italian members promote environmental, economic and social responsibility, innovating buildings in terms of engineering, design, manufacturing and use.



THIS PRODUCT IS

LEED ACCORDANT

LEED (Leadership in Energy and Environmental Design) is an internationally recognized green building certification system, providing third-party verification that a building or community was designed and built using strategies aimed at improving performance across all the metrics that matter most: energy savings, water efficiency, CO2 emissions reduction, improved indoor environmental quality, and stewardship of resources and sensitivity to their impacts.