

# Byronstone



**PRODUCT TYPE:** Glazed porcelain

**COLOURS:** Cotton, Almond and Taupe


**SIZES:** 300x300mm, 300x600mm, 600x600mm  
and 600x1200mm  
Rectified edges

**FINISHES/USAGE:** Matt and Grip/Wall and Floor

**AESTHETIC QUALITIES:** Crosscut stone look

**TECHNICAL INFO** P3 Pendulum Slip Rating (Matt)  
P4 Pendulum Slip Rating (Grip)  
More information on last page

**VARIATION:**



V2



BYRONSTONE is produced using hi-definition inkjet technology to recreate a crosscut stone look. Available in three colours and both a matt and grip finish.

# Byronstone

## PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
300x300mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	MATT	P3 Pendulum	RECTIFIED
600x600mm	MATT	P3 Pendulum	RECTIFIED
600x1200mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	GRIP	P4 Pendulum	RECTIFIED

## FORMATS

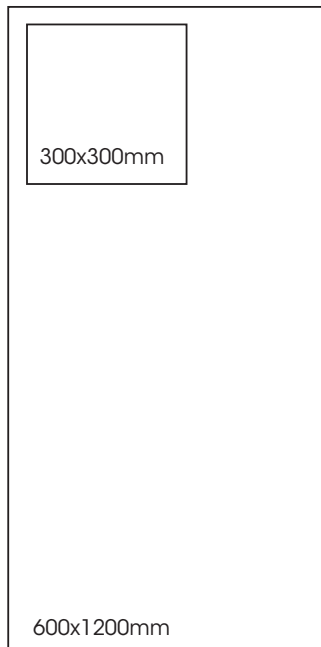

COTTON



ALMOND



MINK

# Byronstone

## COTTON VARIATION



600x1200mm | 12 faces

600x600mm | 24 faces



# Byronstone

## ALMOND VARIATION



600x1200mm | 12 faces

600x600mm | 24 faces

# Byronstone

## MINK VARIATION











600x1200mm | 12 faces

600x600mm | 24 faces

# Byronstone

## TECHNICAL DATA

	technical characteristics	test method	required values	result
	water absorption	ISO 10545-3	≤0.5%	≤0.4%
	modulus of rupture	ISO 10545-4	≥ 35 N/mm <sup>2</sup>	compliant
	surface quality	ISO 10545-2	Complies with the standards	≥95%
	thermal shock resistance	ISO 10545-9	No sample must show visible defects	compliant
	deep abrasion resistance	ISO 10545-6	≤ 175 mm <sup>3</sup>	compliant
	chemical resistance	ISO 10545-13	Declared value	compliant
	resistance to frost	ISO 10545-12	Resistant	compliant
	staining resistance	ISO 10545-14	Minimum Class 3	compliant