

Aria



ARIA is a contemporary series that displays subtle movement and colour variation for a soft limestone look. Available in four colours and three finishes including a feature chevron tile. ARIA is able to add extra design elements to any environment.

PRODUCT TYPE: Glazed Porcelain

COLOURS: Ivory, Ash, Taupe and Deep Taupe

SIZES: 300x300mm 300x600mm and
600x600mm
Rectified edges


FINISHES/USAGE: Matt/Wall and Floor
Grip/Floor Only
Chevron/ Wall Only

AESTHETIC QUALITIES: Subtle movement and colour variation

TECHINICAL INFO: P3 Pendulum Slip rating/Matt
P5 Pendulum Slip rating/Grip

There is inherent variation in colour and calibration between Aria base tiles and Aria Chevron tiles due to the different production process. Please inspect the tiles carefully prior to installation.
More technical data on last page

VARIATION:



V2



Aria

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
300x300mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	MATT	P3 Pendulum	RECTIFIED
600x600mm	MATT	P3 Pendulum	RECTIFIED
300x600mm*	GRIP	P5 Pendulum	RECTIFIED
300x600mm	CHEVRON	-	RECTIFIED

*Please note - Ivory is not available in the Grip finish

FORMATS

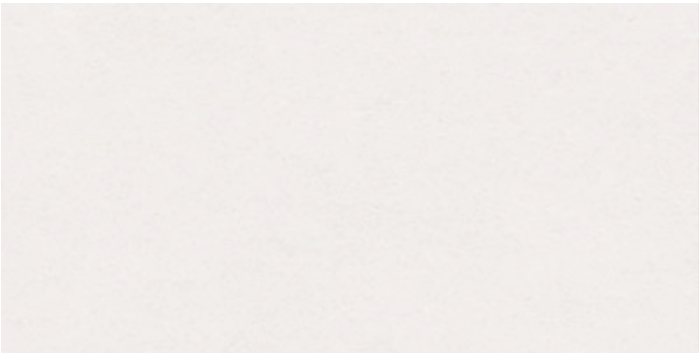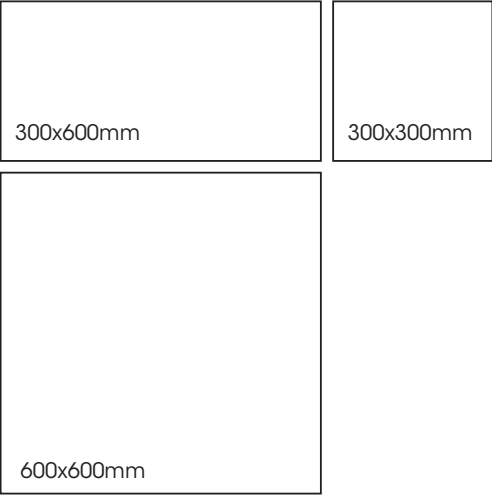

IVORY



IVORY CHEVRON



ASH




ASH CHEVRON

Aria

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
300x300mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	MATT	P3 Pendulum	RECTIFIED
600x600mm	MATT	P3 Pendulum	RECTIFIED
300x600mm*	GRIP	P5 Pendulum	RECTIFIED

FORMATS

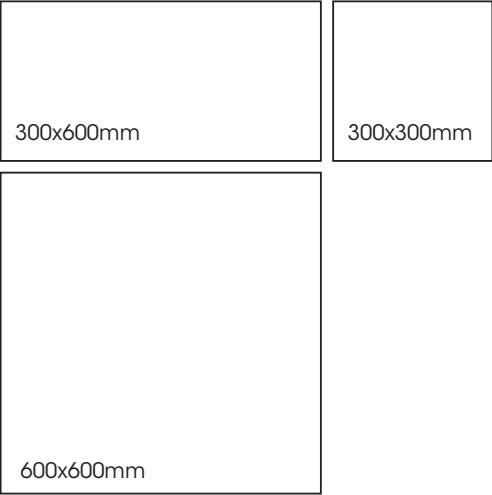


TAUPE



DEEP TAUPE


Aria

IVORY VARIATION

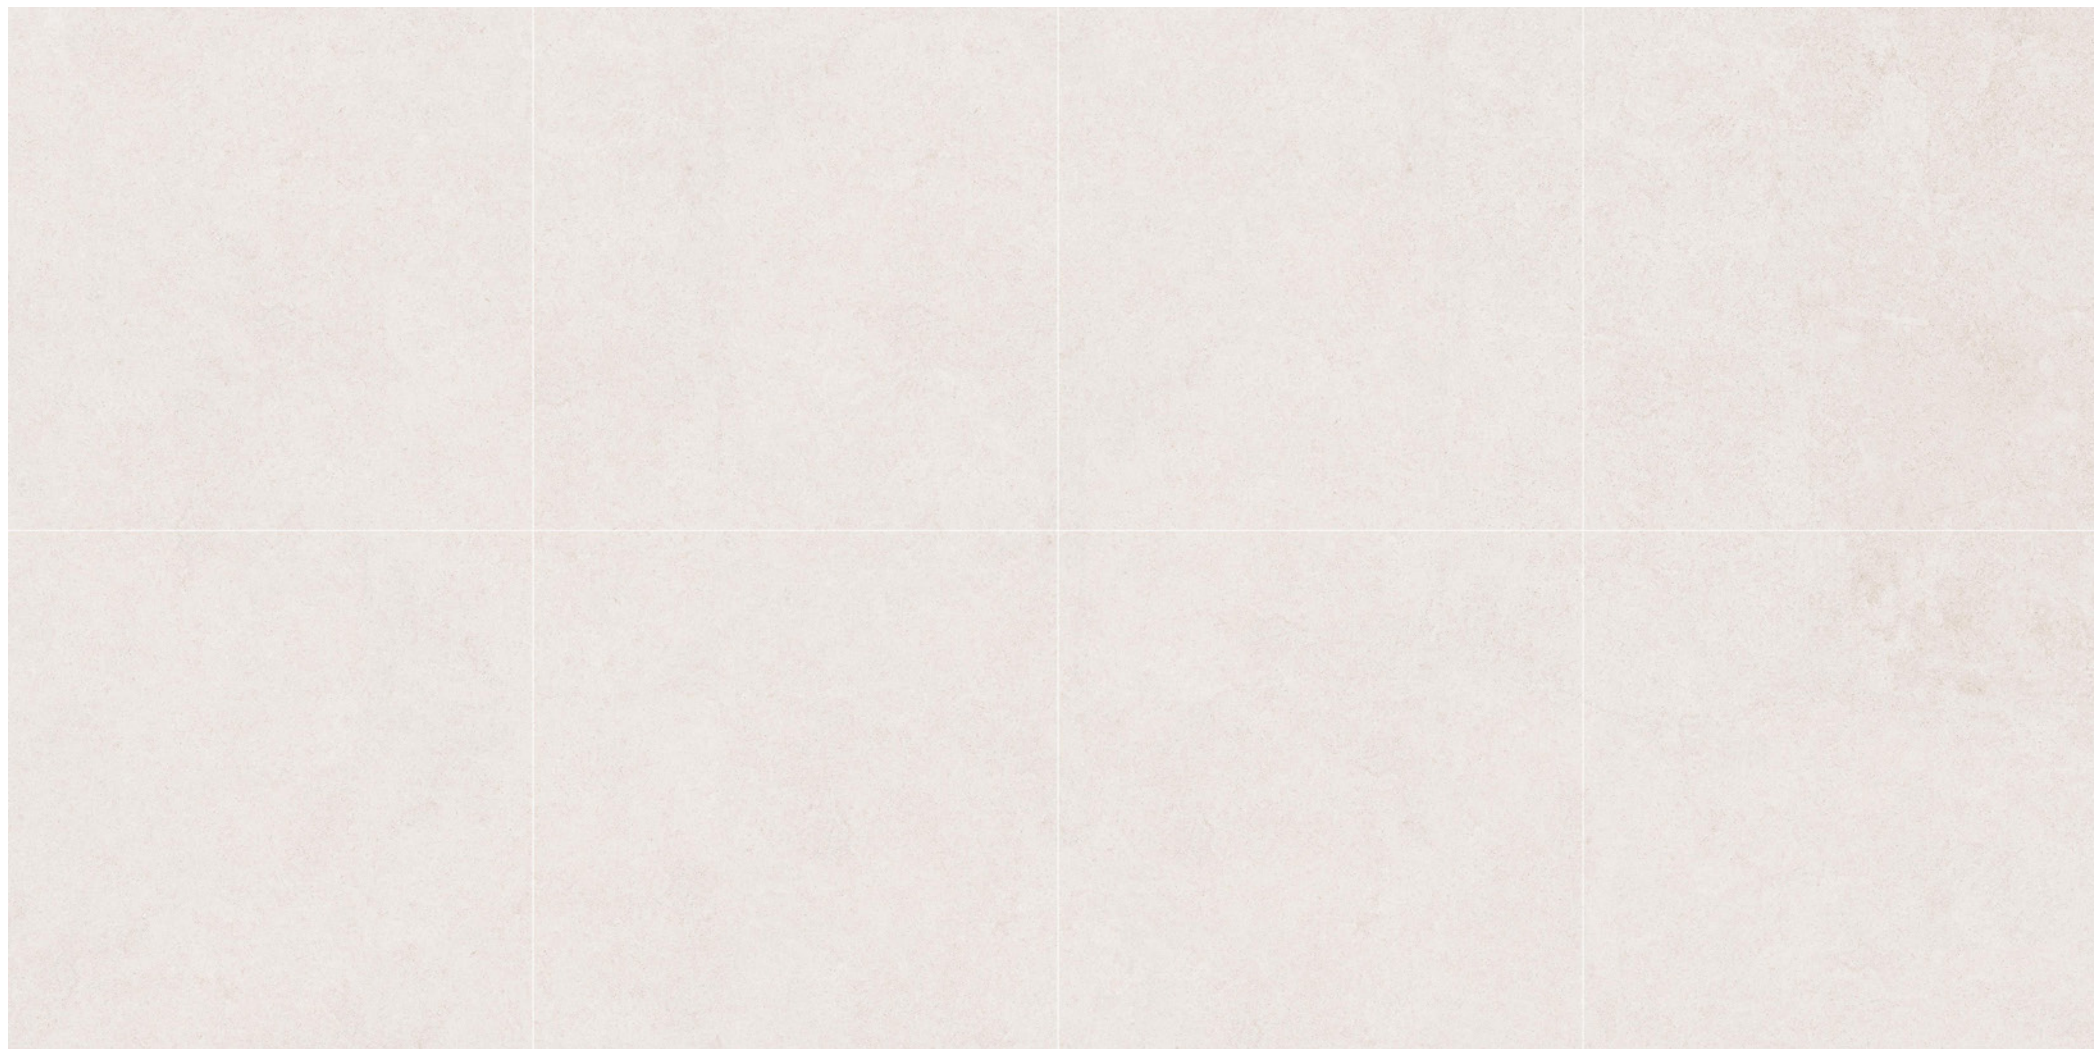


Aria

ASH VARIATION

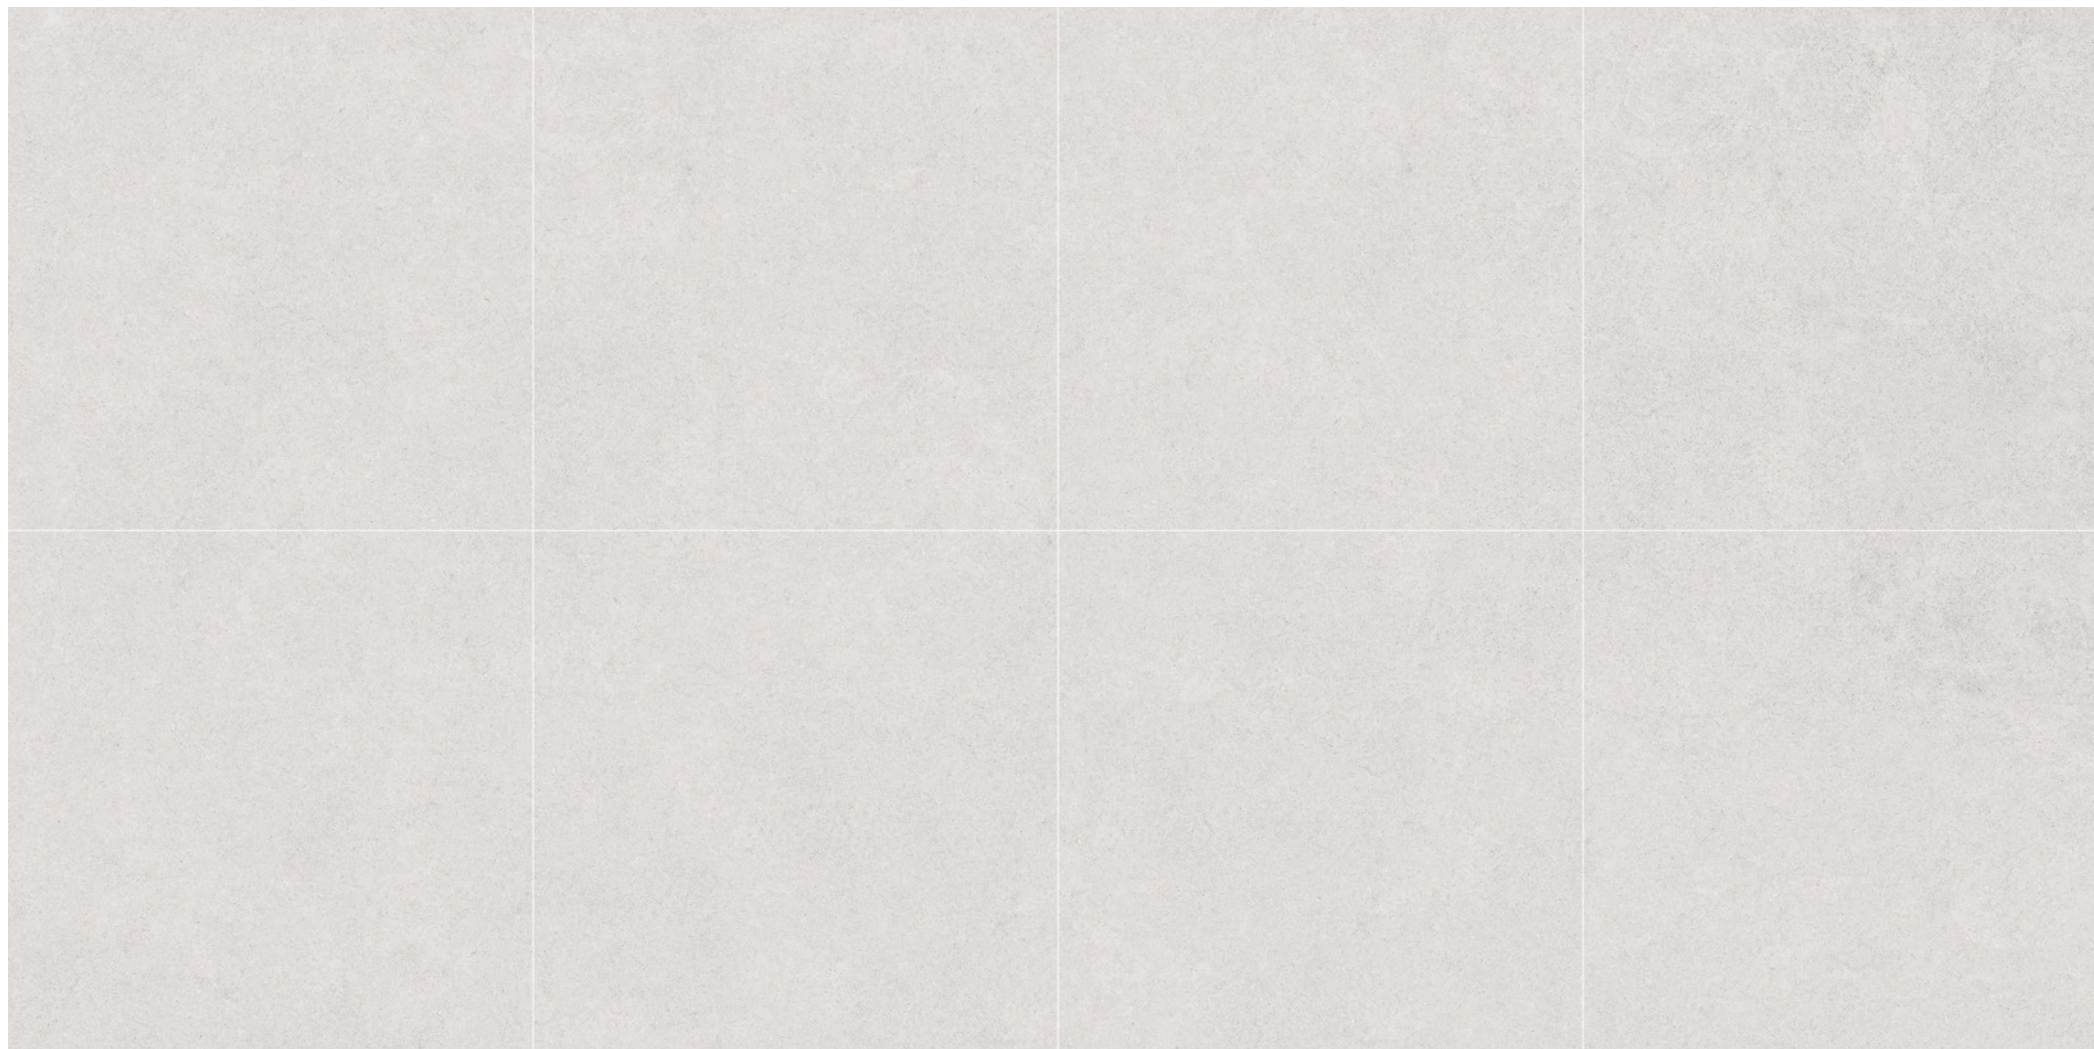

Aria

TAUPE VARIATION

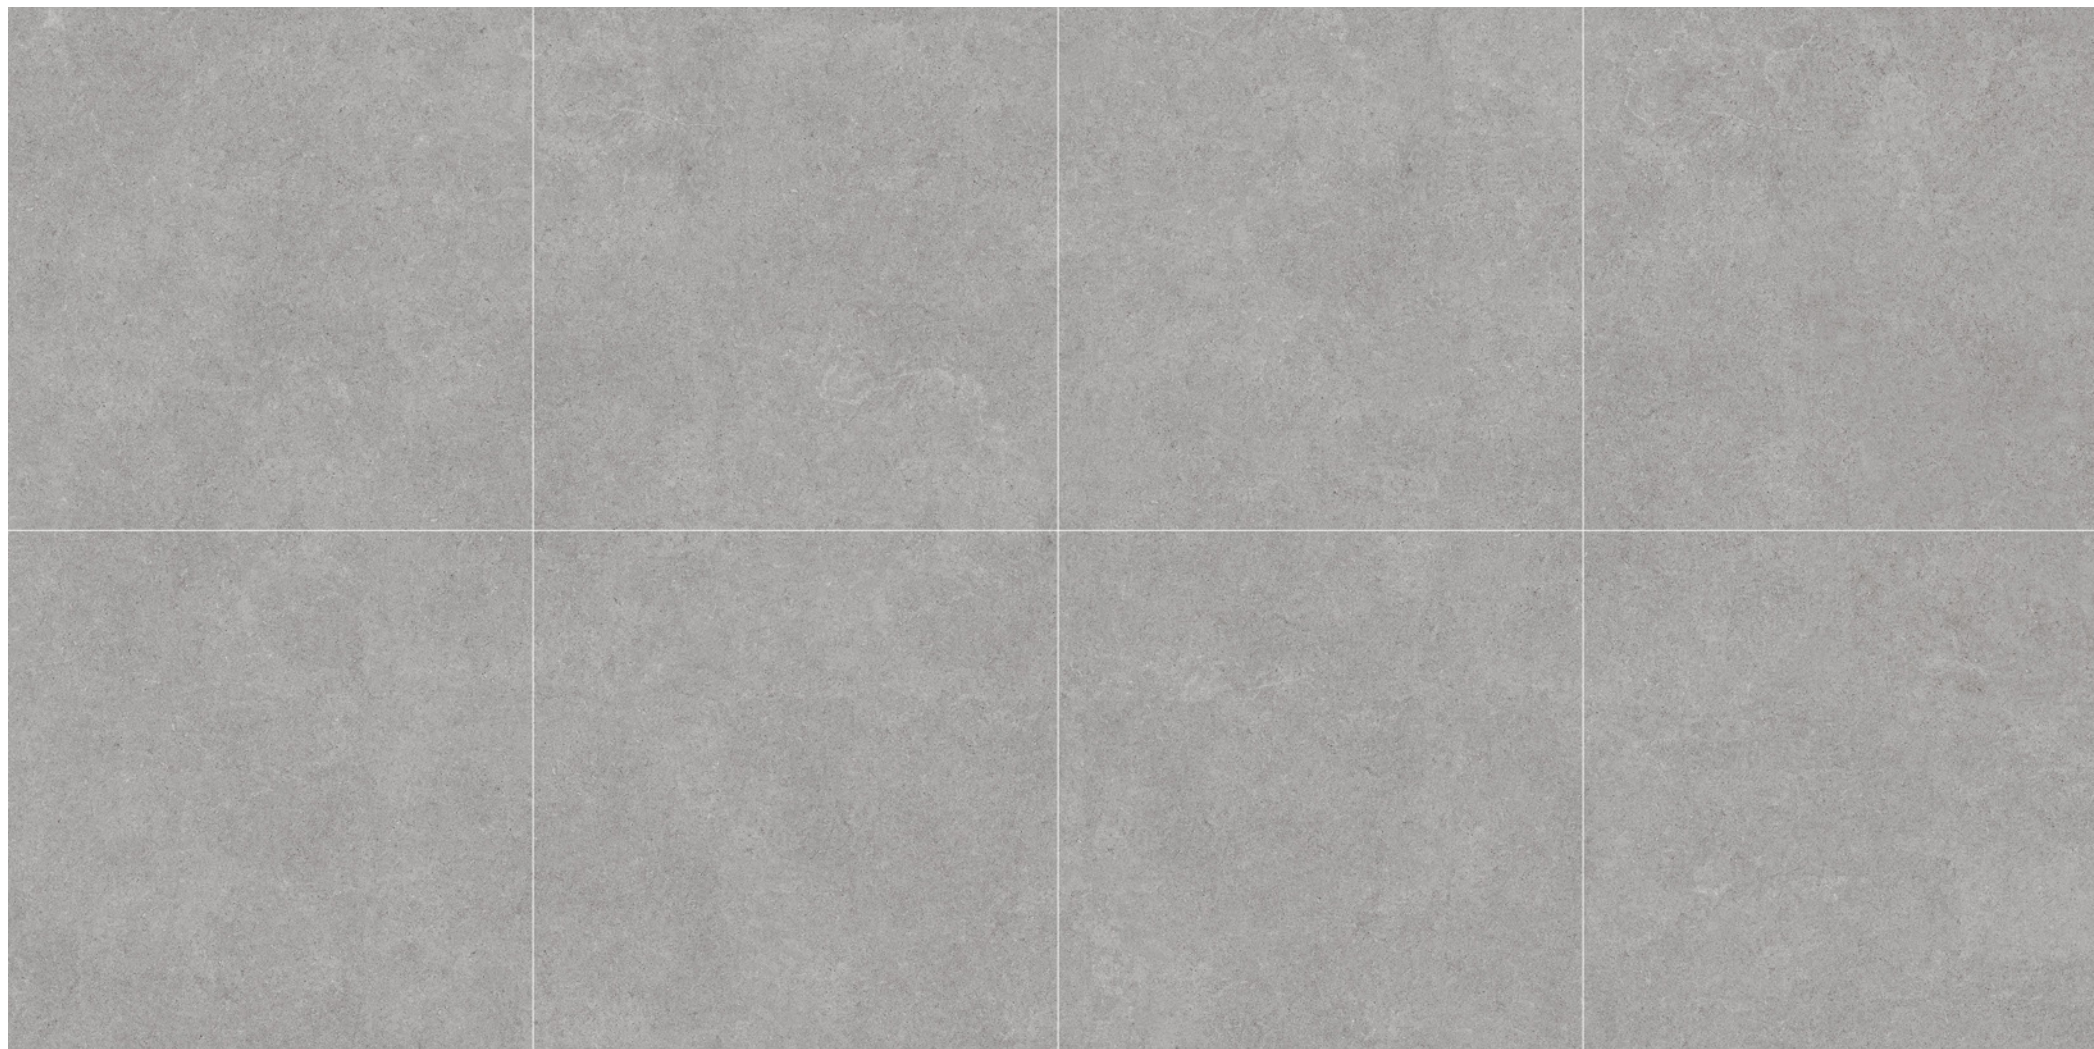

Aria

DEEP TAUPE VARIATION



Aria



Aria



Aria



TECHNICAL DATA

Technical Characteristic	Test Method	Requirement	Result
Surface quality	ISO 10545-2	95%	100%
Length and Width	ISO 10545-2	± 0,6%	0.5%
Thickness	ISO 10545-2	± 0,5	± 0,5
Straightness of sides	ISO 10545-2	± 0,5%	± 0,3%
Water Absorbtion	ISO 10545-3	≤ 3%	≤ 3%
Modulus of Rupture	ISO 10545-4	≥ 35	≥ 38
Breaking Strength	ISO 10545-4	≥ 1100	≥ 1300
Crazing Resistance	ISO 10545-11	Pass	Resistant
Chemical Resistance	ISO 10545-13	Declared Value	ULA / UHB
Stain Resistance	ISO 10545-14	Minimum Class 3	Class 5

Please note that all products must be fabricated using score & snap method and/or wet cutting in conjunction with AS/NZS 1716:2012, AS/NZS 1715:2009, AS/NZS 60335.2.69:2017 For more information please refer to: <https://www.safework.nsw.gov.au>

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.