

XL Flutes



PRODUCT TYPE: Natural stone wall tile

COLOURS: Rosa Zarci, Zamora Travertine, Carrara C and Rosso Asiago

SIZES: 50x900mm Concave and Orb
Rectified edges


FINISHES/USAGE: Honed / Wall only

AESTHETIC QUALITIES: 3D natural stone tiles

TECHNICAL INFO:

- Use adhesive suitable for moisture sensitive stone ie Mapei Keralastic T
- Use stone sensitive grout and silicons
- Seal before and after grouting

VARIATION:



V4

Designed in-house by Skheme, XL Flutes is our latest 3D natural stone creation featuring three beautiful stone colours and available in both a concave and orb shape. Each XL Flute has a matching natural stone slab allowing it to be a perfect combination of colour and surface. Suitable for wall only.

XL Flutes

PRODUCT SPECIFICATIONS

| SIZES | FINISHES | SLIP RATING | TILE EDGE |
|----------|----------|-------------|-----------|
| 50x900mm | HONED | - | RECTIFIED |

FORMATS



50x900mm



ROSA ZARCI ORB HONED



ROSA ZARCI CONCAVE HONED

XL Flutes

PRODUCT SPECIFICATIONS

| SIZES | FINISHES | SLIP RATING | TILE EDGE |
|----------|----------|-------------|-----------|
| 50x900mm | HONED | - | RECTIFIED |

FORMATS



50x900mm



ZAMORA TRAVERTINE ORB HONED



ZAMORA TRAVERTINE CONCAVE HONED

XL Flutes


PRODUCT SPECIFICATIONS

| SIZES | FINISHES | SLIP RATING | TILE EDGE |
|----------|----------|-------------|-----------|
| 50x900mm | HONED | - | RECTIFIED |

FORMATS



50x900mm

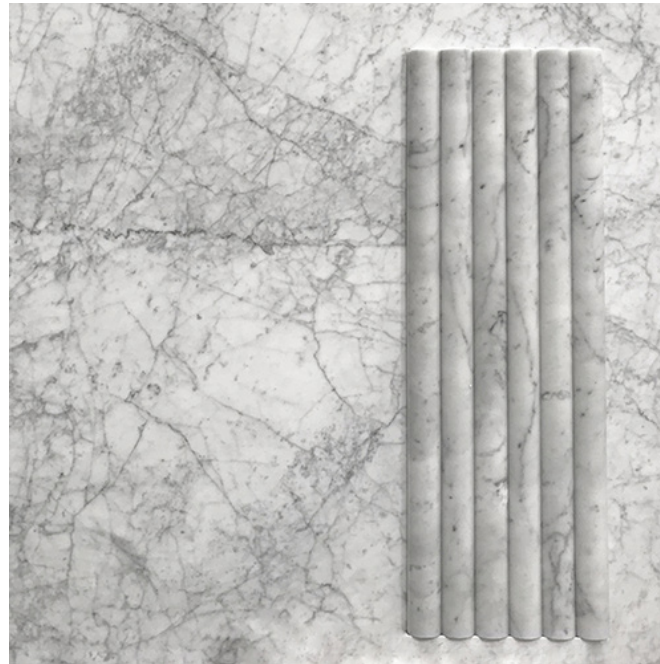

CARRARA C ORB HONED



CARRARA C CONCAVE HONED

XL Flutes

PRODUCT SPECIFICATIONS

| SIZES | FINISHES | SLIP RATING | TILE EDGE |
|----------|----------|-------------|-----------|
| 50x900mm | HONED | - | RECTIFIED |

FORMATS



50x900mm



ROSSO ASIAGO ORB HONED



ROSSO ASIAGO CONCAVE HONED

XL Flutes




XL Flutes



XL Flutes



XL Flutes

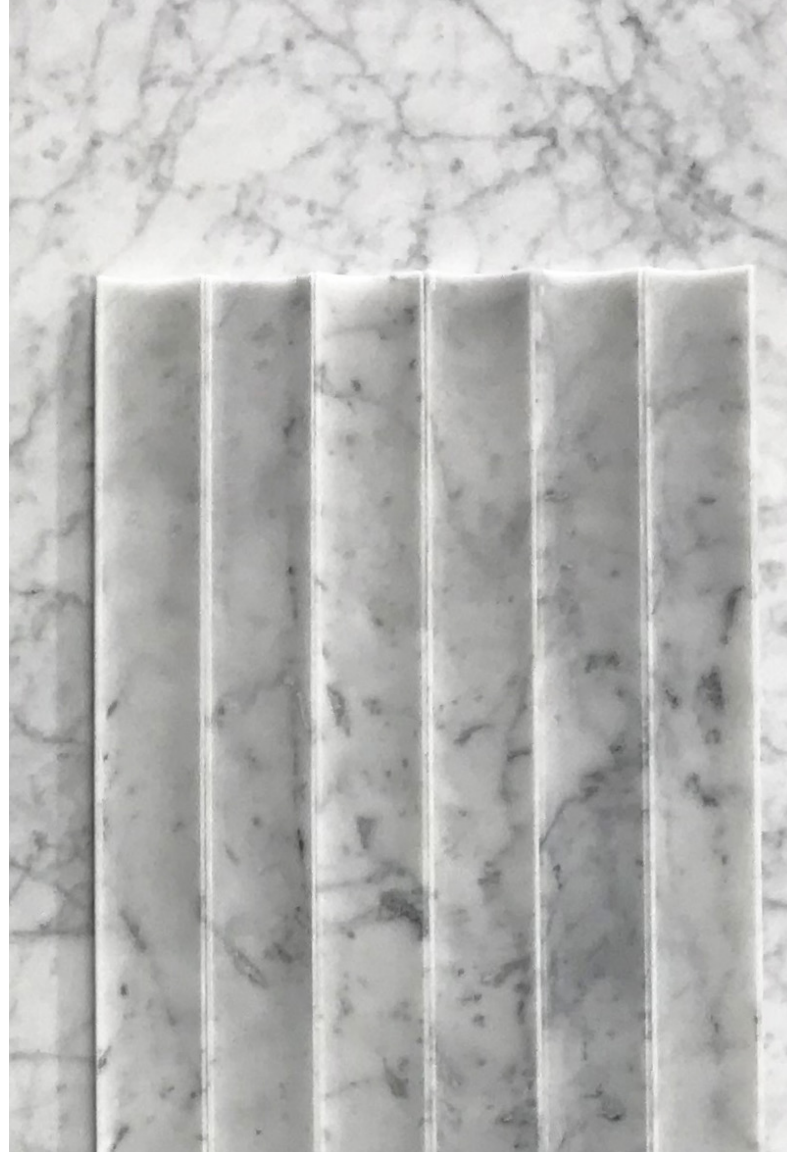

TECHNICAL INFORMATION

- Use fast setting adhesives
- Apply sealers such as DRY TREAT during the installation process
- Use stone friendly grout and silicones

XL Flutes are a decorative design element for vertical surfaces and should be handled with care. The product should be supported on both ends, preferably carried vertically when handled once removed the Styrofoam boxes.

Installation should be completed using stone suitable fast setting adhesive or silicone to a flat, non-moisture sensitive substrate. Upon installation, the stone should be sealed with appropriate stone sealer.