

# Tibet



**PRODUCT TYPE:** Glazed Porcelain Floor Tile

**COLOURS:** Pearl, Greige, Gris and Grafito


**SIZES:** 60x200mm, 300x300mm, 300x600mm, 400x600mm Paver Coping, 600x600mm, 600x1200mm, 600x600x20mm Paver and 700x800mm Crazy Pave Rectified edges

**FINISHES/USAGE:** Matt and Grip  
Floor and wall

**AESTHETIC QUALITIES:** Mixed Stone look

**TECHINICAL INFO:** P2 Pendulum slip rating (Matt)  
P5 Pendulum slip rating (Grip)  
P5 Pendulum slip rating (Paver)  
More technical info on the last page

**VARIATION:**



V3

TIBET realistically represents a mixture of stone surfaces with a focus on texture and natural colour. Available in a wide range of sizes and two finishes, TIBET can be used for both residential and commercial applications.


# Tibet

## PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
60x200mm	MATT	P2 Pendulum	RECTIFIED
300x300mm	MATT	P2 Pendulum	RECTIFIED
300x600mm	MATT	P2 Pendulum	RECTIFIED
600X600mm	MATT	P2 Pendulum	RECTIFIED
600x1200mm	MATT	P2 Pendulum	RECTIFIED
700x800mm	MATT CRAZY PAVE	P2 Pendulum	RECTIFIED
300x600mm	GRIP	P5 Pendulum	RECTIFIED
600x600mm	GRIP	P5 Pendulum	RECTIFIED
600x600x20mm	GRIP PAVER	P5 Pendulum	RECTIFIED
700x800mm	GRIP CRAZY PAVE	P5 Pendulum	RECTIFIED
400x600x20mm	PAVER COPING	-	-

**\*Please note** - 600x1200mm Matt is only available in Pearl and Gris and 700x800mm Crazy Pave is only available in Pearl and Greige.

## FORMATS

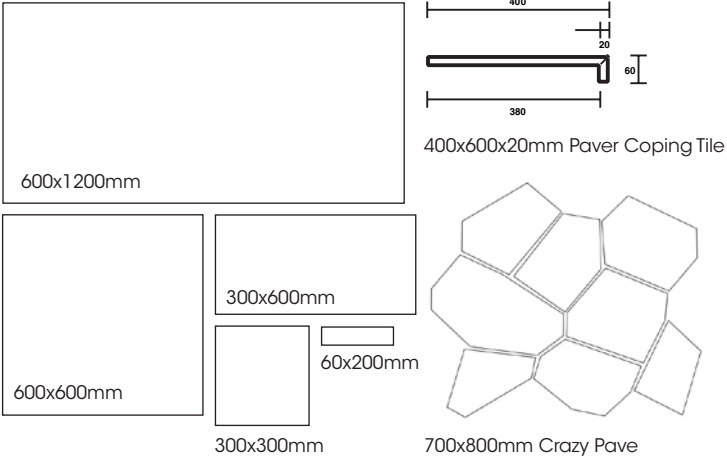

PEARL



GREIGE



GRIS




GRAFITO

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



# Tibet

## CRAZY PAVE LAYING

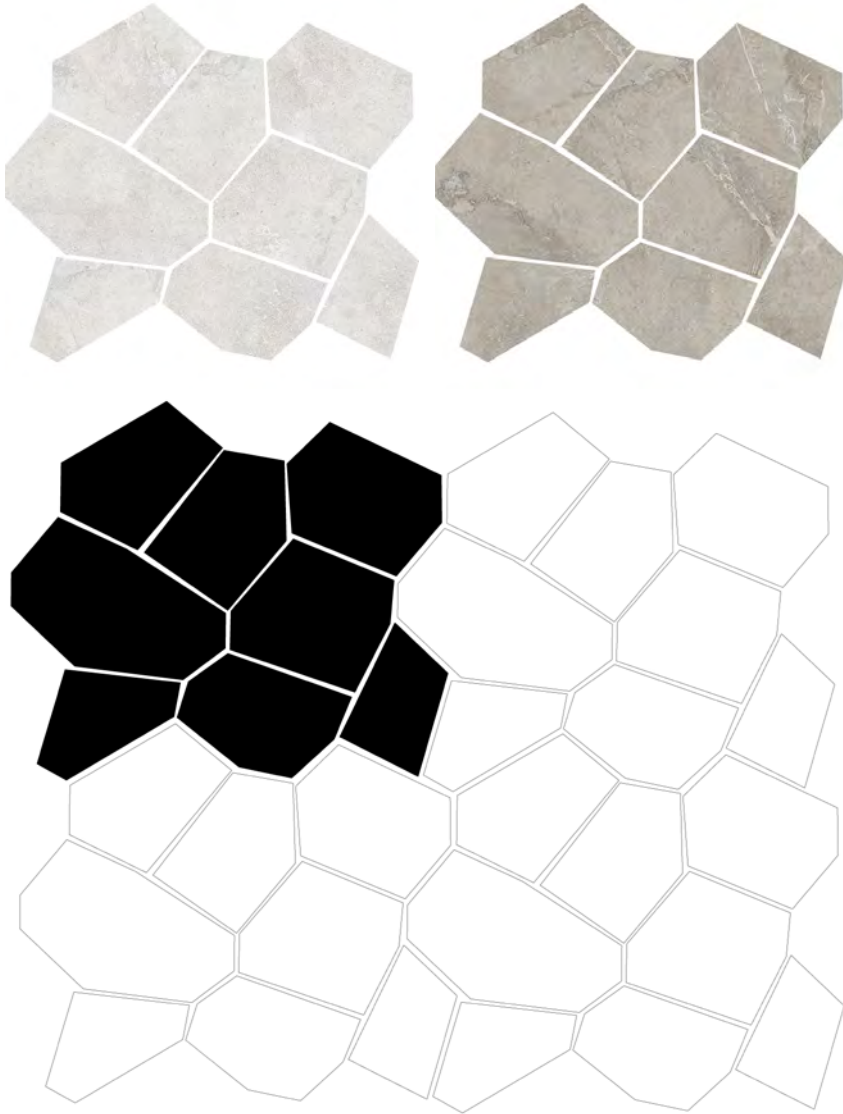

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



# Tibet

## GRIP PAVER COPING



# Tibet

## BRICK FLATLAY EXAMPLES



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



# Tibet

## PEARL VARIATION



# Tibet


## GREIGE VARIATION





# Tibet


## GRIS VARIATION

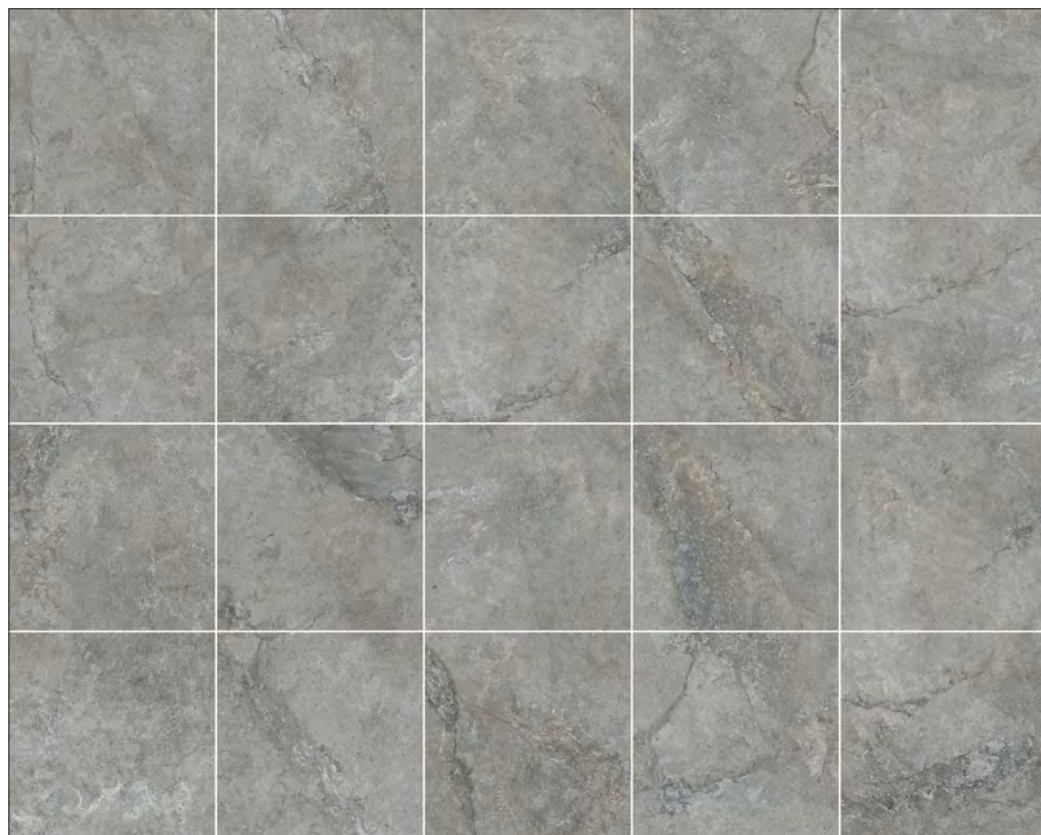



# Tibet

## GRAFITO VARIATION

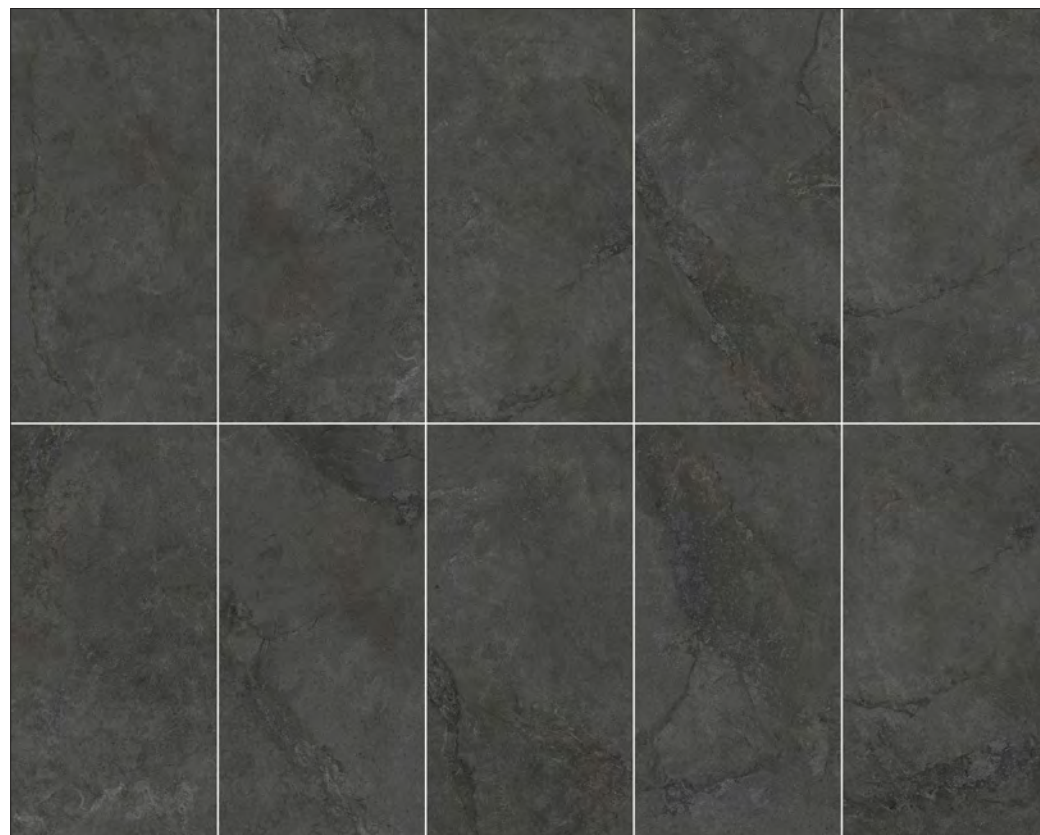

# Tibet





# Tibet



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

# Tibet











# Tibet






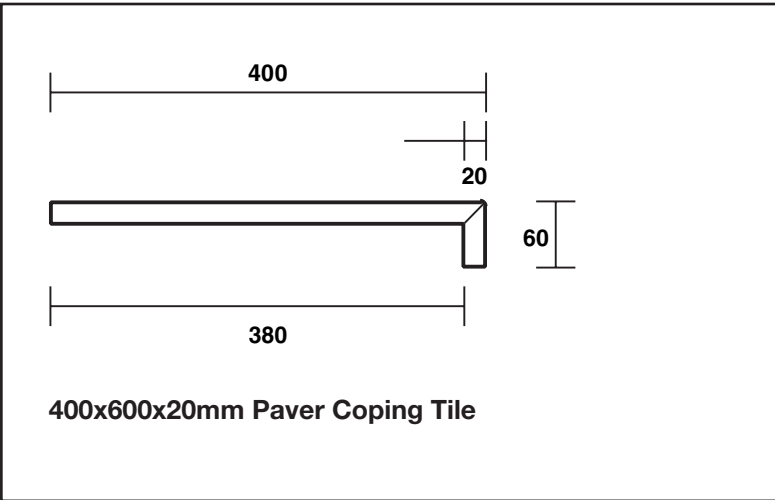




TECHNICAL DATA - TILE

	technical characteristics	test method	required values	result
	water absorption	ISO 10545-3	≤0.5%	≤0.5%
	breaking strength	ISO 10545-4	≥1300N	2265N
	shock resistance	ISO 10545-11	Pass	Pass
	chemical resistance	ISO 10545-13	Declared value	Pass
	resistance to frost	ISO 10545-12	Resistant	Pass
	staining resistance	ISO 10545-14	Minimum Class 3	Pass



TECHNICAL DATA - PAVER

	technical characteristics	result	
	water absorption	≤0.5%	<p>Porcelain Pavers and Coping tiles must be installed to Australian Standards (AS 3958.1, AS 3958.2 &amp; AS 3727-2016) using correct procedures and products such as Mapei Ultralite S1. No spot fixing under any circumstances.</p>
	breaking strength	12061N	
	max warpage	±2.0mm	
	max edge curvature	±2.0mm	
	chemical resistance	Pass	<div><p>400x600x20mm Paver Coping Tile</p></div>
	resistance to frost	Pass	
	staining resistance	Pass	