

# Aspley



**PRODUCT TYPE:** Colour-bodied porcelain

**COLOURS:** Pearl, Tawn, Greige, Gris and Grafito


**SIZES:** 300x300mm, 300x600mm, 600x600mm,  
600x1200mm and 600x1200x20mm  
Rectified edges

**FINISHES/USAGE:** Matt and Grip/Wall & Floor

**AESTHETIC QUALITIES:** Ceppo di Gre inspired porcelain

**TECHNICAL INFO:** P3 Pendulum Slip Rating (Matt)  
P5 Pendulum Slip Rating (Grip)  
P5 Pendulum Slip Rating (Grip Paver)  
More technical data on the last page

**VARIATION:**



V2

Inspired by Ceppo di Gre, ASPLEY features the beautiful multi-colours of fragmented pebbles the natural stone is known for. Available in five colours and a wide range of sizes including a large 600x1200mm format and 20mm pavers.

# Aspley

## PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
300x300mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	MATT	P3 Pendulum	RECTIFIED
600x600mm	MATT	P3 Pendulum	RECTIFIED
600x1200mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	GRIP	P5 Pendulum	RECTIFIED
600x600x20mm	GRIP PAVER	P5 Pendulum	RECTIFIED



PEARL




TAWN



GREIGE


## FORMATS




600x600mm




600x1200mm




300x600mm



300x300mm

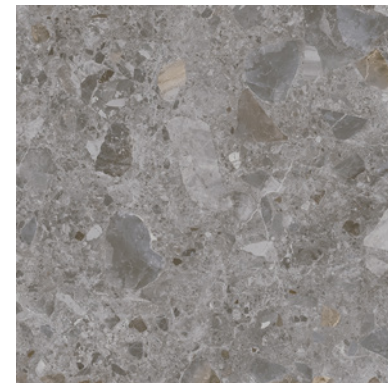

GRIS

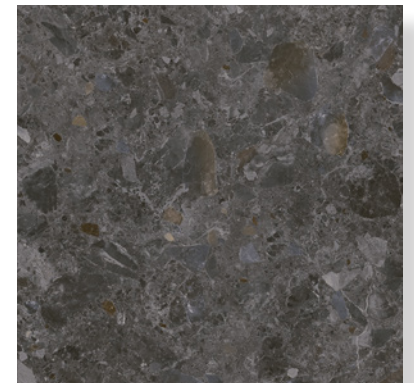

GRAFITO

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

# Aspley

## PEARL VARIATION




# Aspley

## TAWN VARIATION




# Aspley

## GREIGE VARIATION

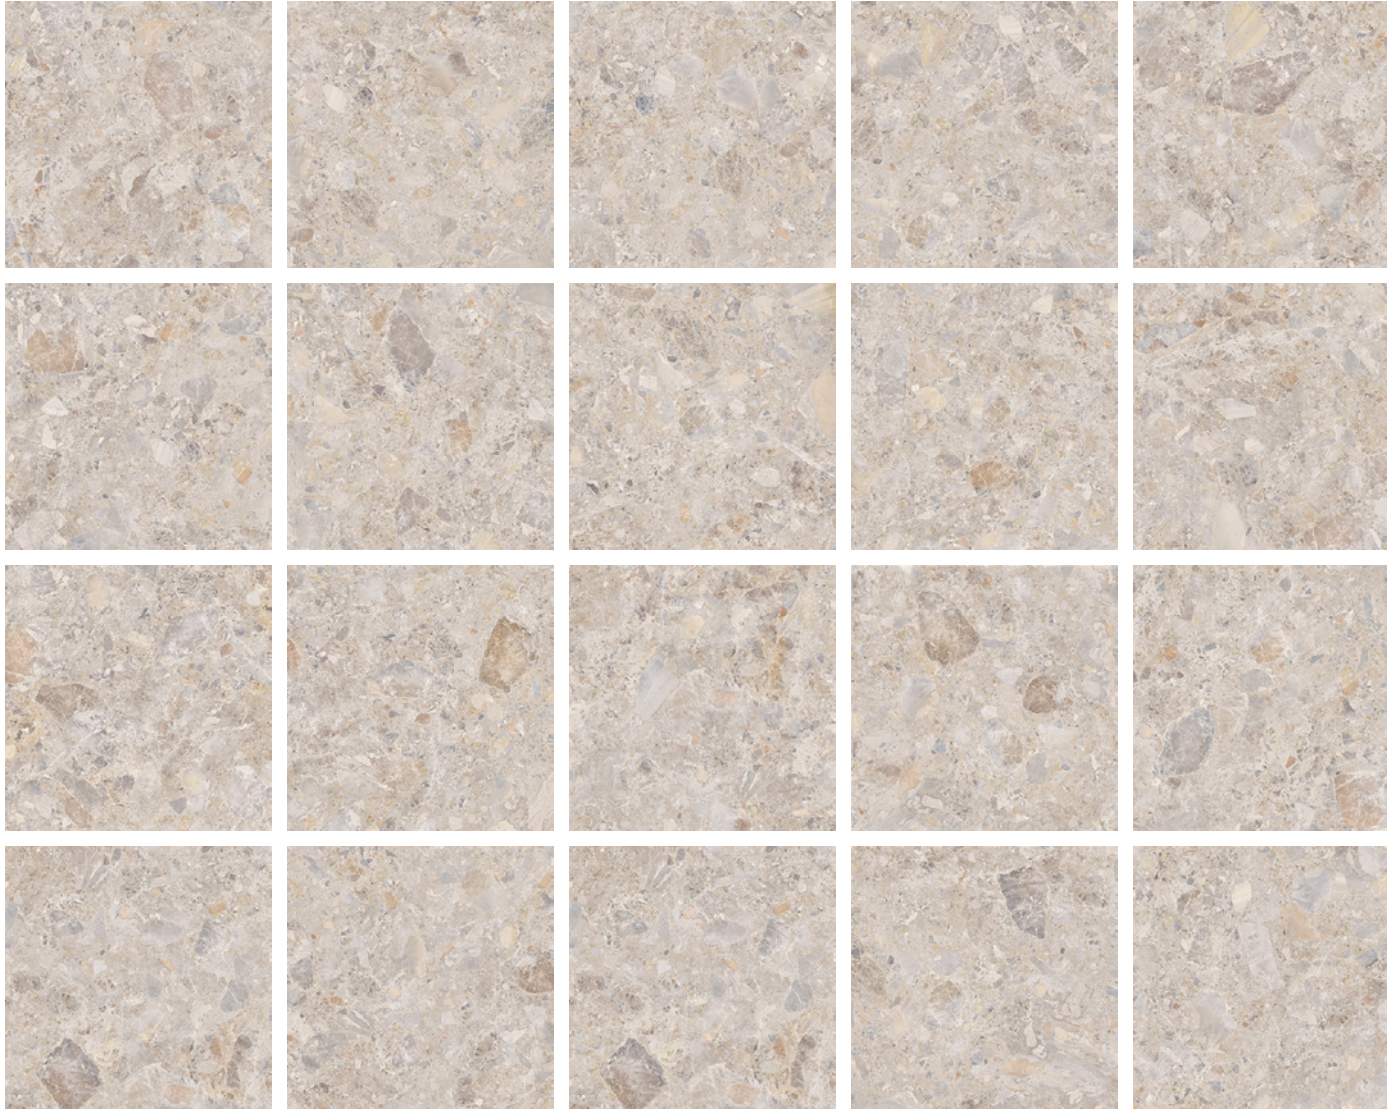


# Aspley

## GRIS VARIATION

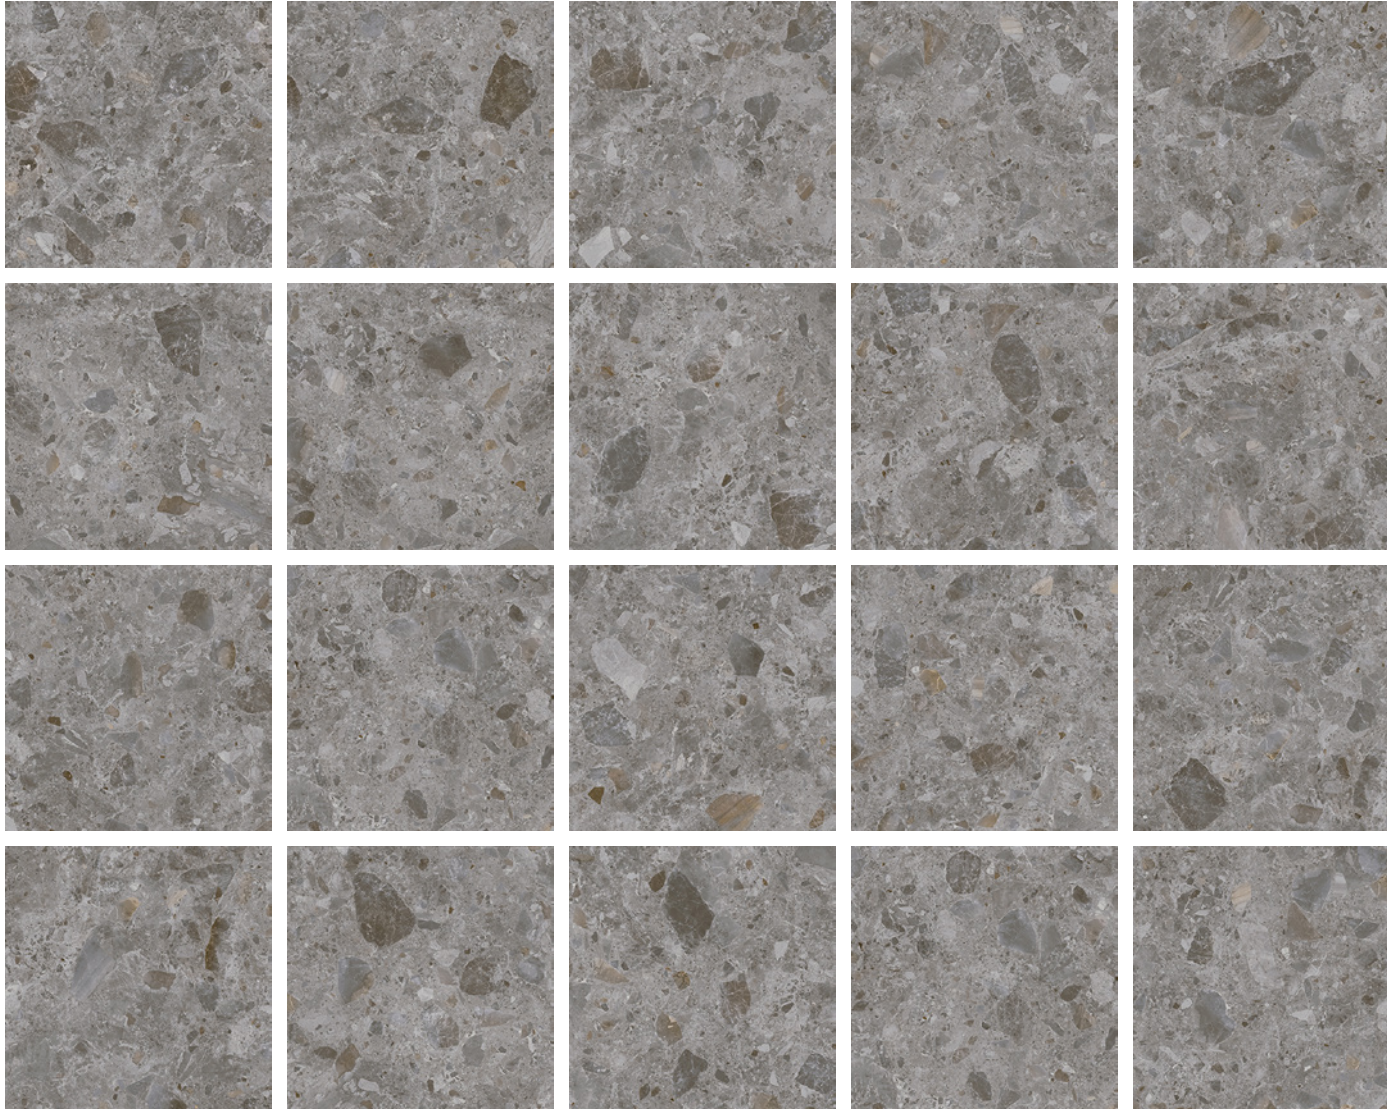

# Aspley

## GRAFITO VARIATION

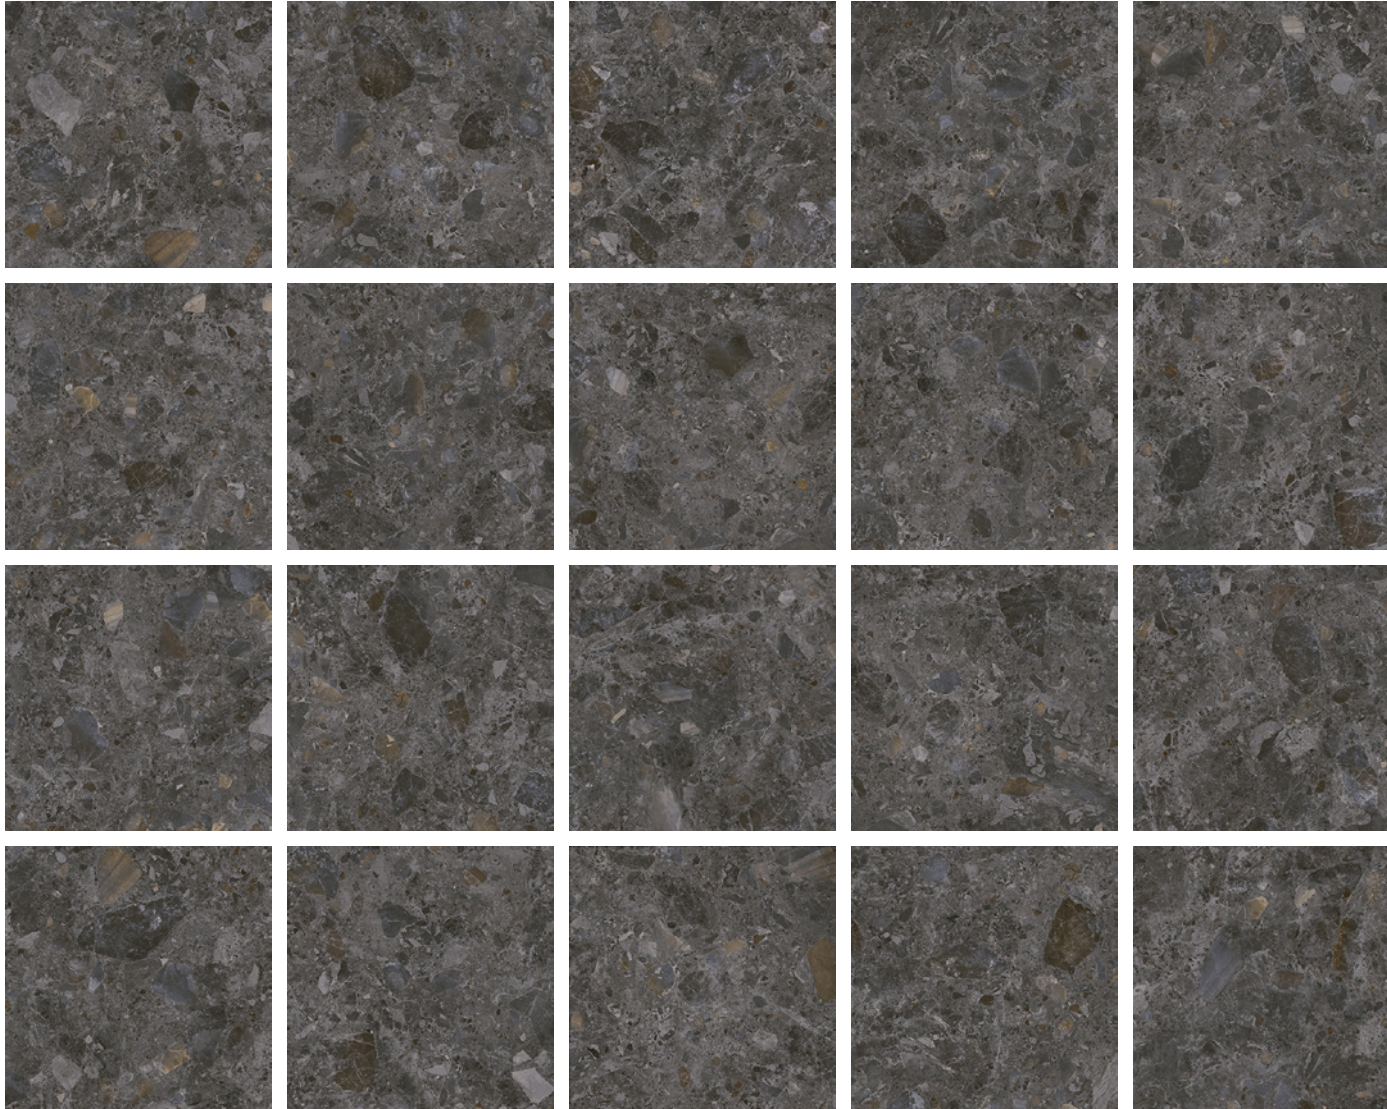

# Aspley











# Aspley










# Aspley



## TECHNICAL DATA - TILE

	technical characteristics	test method	required values	result
	water absorption	ISO 10545-3	≤0.5%	≤0.5%
	breaking strength	ISO 10545-4	≥1300N	2265N
	shock resistance	ISO 10545-11	Pass	Pass
	chemical resistance	ISO 10545-13	Declared value	Pass
	resistance to frost	ISO 10545-12	Resistant	Pass
	staining resistance	ISO 10545-14	Minimum Class 3	Pass

## TECHNICAL DATA - PAVER

	technical characteristics	test method	result	
	water absorption	ISO 10545-3	≤0.5%	Porcelain Pavers and Coping tiles must be installed to Australian Standards (AS 3958.1, AS 3958.2 & AS 3727-2016) using correct procedures and products such as Mapei Ultralite S1. No spot fixing under any circumstances.
	breaking strength	ISO 10545-4	12061N	
	max warpage	ISO 10545-2	±2.0mm	
	max edge curvature	ISO 10545-2	±2.0mm	
	chemical resistance	ISO 10545-13	Pass	
	resistance to frost	ISO 10545-12	Pass	
	staining resistance	ISO 10545-14	Pass	