

# Roche



Made in Italy, ROCHE series is our latest range that encapsulates the harmonious combination of stone and marble to create a highly realistic three-dimensional effect. Available in five colours, ROCHE is a versatile indoor/outdoor range.

\*Special order - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.

**PRODUCT TYPE:** Glazed Porcelain

**COLOURS:** Linen, Bristle, Organic, Shadow and Mood

**SIZES:** 300x600mm, 600x600mm and 600x1200mm

**\*More sizes available**  
Rectified edges


**FINISHES/USAGE:** Matt, Hammered, Brushed and Antique\*  
Floor and wall

**AESTHETIC QUALITIES:** Stone and marble look

**TECHNICAL INFO:** P2 Pendulum Slip Rating (Matt)  
P5 Pendulum Slip Rating (Hammered)  
More technical info on the last page

**ORIGIN:** Italy

**VARIATION:**



V4

**CERTIFICATIONS:**





# Roche

## PRODUCT SPECIFICATIONS


SIZES	FINISHES	SLIP RATING	TILE EDGE
300x600mm	MATT	P2 Pendulum	RECTIFIED
600x600mm	MATT	P2 Pendulum	RECTIFIED
600x1200mm	MATT	P2 Pendulum	RECTIFIED
600x600mm	HAMMERED	P5 Pendulum	RECTIFIED
600x1200mm	BRUSHED*	-	RECTIFIED

\*Please note - Brushed finish is only available in Linen colour

## FORMATS

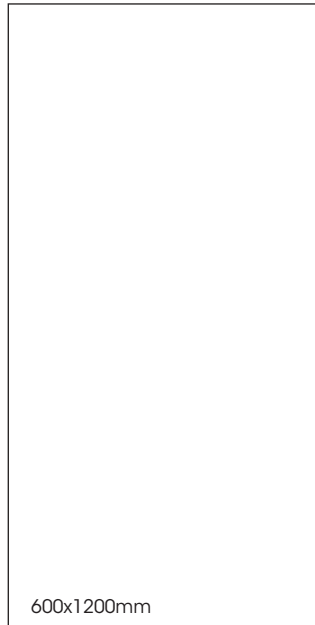

LINEN

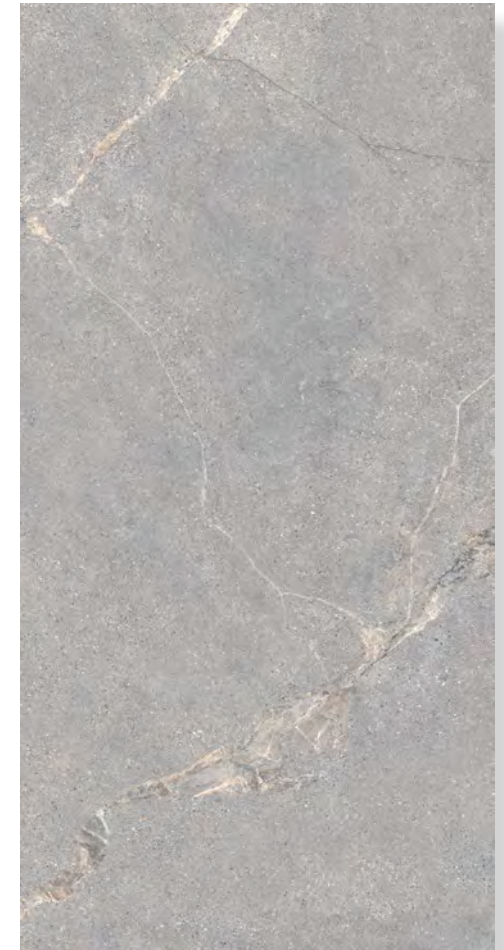

SHADOW

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.


# Roche

## PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
300x600mm	MATT	P2 Pendulum	RECTIFIED
600x600mm	MATT	P2 Pendulum	RECTIFIED
600x600mm	HAMMERED	P5 Pendulum	RECTIFIED

\*Special order only - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.

## FORMATS



BRISTLE



ORGANIC



MOOD\*

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



## SPECIAL ORDER SIZES AND FINISHES

Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.

### 300x600mm



#### **MATT**

Mood


#### **HAMMERED**

Linen, Bristle, Organic, Shadow and Mood

#### **ANTIQUE**

Linen, Bristle, Organic, Shadow and Mood

### 600x600mm




#### **MATT**

Mood

#### **HAMMERED**

Linen, Bristle, Organic, Shadow and Mood

### 600x1200mm



#### **MATT**

Bristle, Organic and Mood


#### **HAMMERED**

Linen, Bristle, Organic, Shadow and Mood

#### **ANTIQUE**

Linen, Bristle, Organic, Shadow and Mood

### 600x1200x20mm



#### **HAMMERED**

Linen, Bristle, Organic, Shadow and Mood


### 145x498mm Chevron



#### **MATT**

Linen, Bristle, Organic, Shadow and Mood

### 300x600mm Mosaics

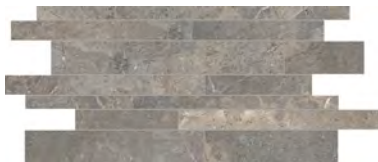

#### **MATT**

Linen, Bristle, Organic, Shadow and Mood

### 300x300mm Mosaics



#### **MATT**

Linen, Bristle, Organic, Shadow and Mood

### 290x310mm Brick Mosaics



#### **ANTIQUE**

Linen, Bristle, Organic, Shadow and Mood

# Roche

## LINEN VARIATION

600x600mm



600x1200mm



# Roche

## SHADOW VARIATION

600x600mm



600x1200mm





# Roche

## BRISTLE VARIATION

600x600mm



# Roche

## ORGANIC VARIATION

600x600mm






# Roche

## MOOD VARIATION

600x600mm

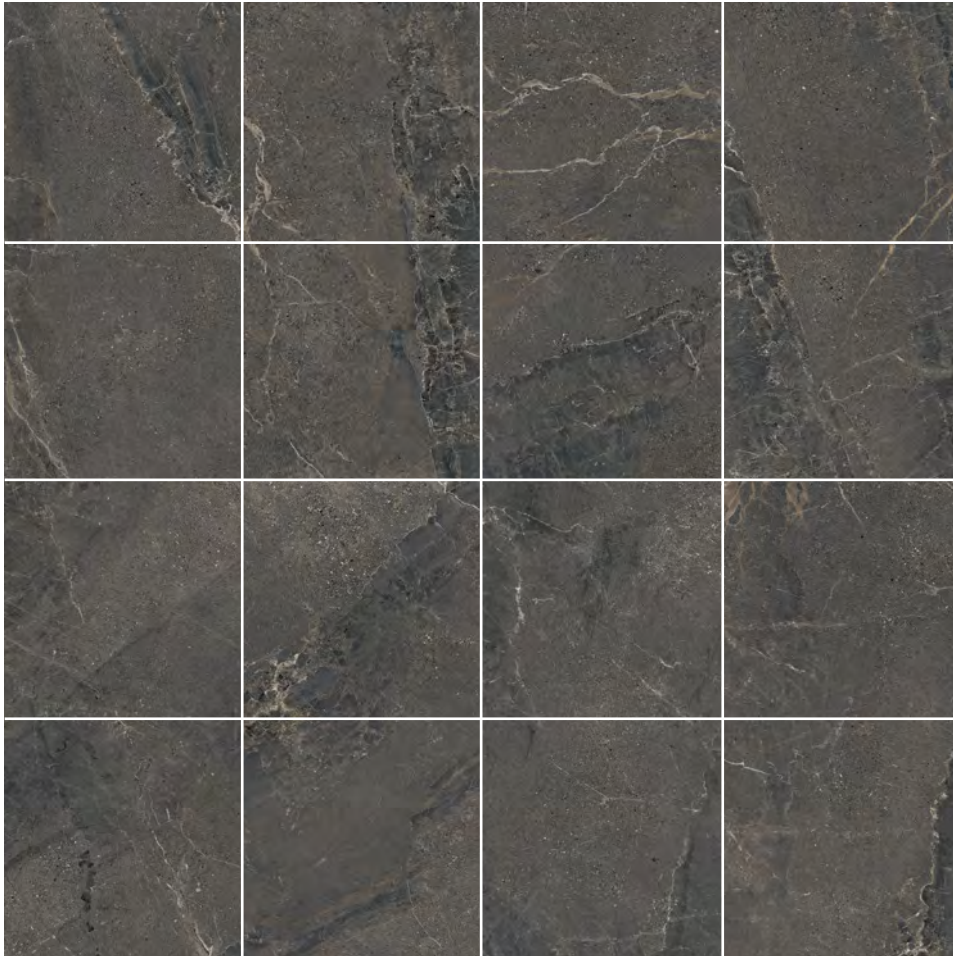



# Roche





# Roche













# Roche



## TECHNICAL DATA

	technical characteristics	test method	required values	result
	water absorption	ISO 10545-3	≤0.5%	0.05%
	modulus of rupture	ISO 10545-4	≥35 N/mm <sup>2</sup>	≥50 N/mm <sup>2</sup>
	surface quality	ISO 10545-2	Complies with the standards	≥95%
	breaking strength	ISO 10545-4	≥1300 N	2.200 N 9,5 mm 13.600 N 20mm
	resistance to deep abrasion	ISO 10545-6	≤175 mm <sup>3</sup>	145 mm <sup>3</sup>
	chemical resistance	ISO 10545-13	Declared value	Pass
	resistance to frost	ISO 10545-12	Resistant	Pass
	staining resistance	ISO 10545-14	Minimum Class 3	Pass

## CERTIFICATIONS



The GREENGUARD Environmental Institute is an industry-independent organisation with a mission to improve indoor air quality and reduce people's exposure to chemicals and other pollutants. As an ISO-IEC Guide 65:1996 accredited, third-party organization, the GREENGUARD Environmental Institute certifies products and materials for low chemical emissions and provides a resource for choosing healthier products and materials for indoor environments. Certified products must meet chemical emissions standards based on established criteria from key public health agencies.



LEED (Leadership in Energy and Environmental Design) is an internationally recognized green building certification system, providing third-party verification that a building or community was designed and built using strategies aimed at improving performance across all the metrics that matter most: energy savings, water efficiency, CO2 emissions reduction, improved indoor environmental quality, and stewardship of resources and sensitivity to their impacts.



Italian GREEN BUILDING COUNCIL, the association of top players working to transform the building market towards sustainability and to build liveable communities. GBC Italian members promote environmental, economic and social responsibility, innovating buildings in terms of engineering, design, manufacturing and use.