skheme®

Cleft

|	
PRODUCT TYPE:	Glazed, colour bodied porcelain
COLOURS:	Tawn, Pearl, Sky Grey, Midnight Ash and Hampshire
SIZES:	75x300mm, 300x600m and 600x600mm Rectified Edges
FINISHES/USAGE:	Natural and Grip/Wall and Floor
AESTHETIC QUALITIES:	Natural Slate look
TECHNICAL INFO:	P3 Pendulum slip rating (Natural) P5 Pendulum slip rating (Grip) More technical data on the last page
VARIATION:	V3
CERTIFICATIONS:	ENVIRONMENTAL MANAGEMENT SYSTEM ISO 14001

A sleek interpretation of slate, CLEFT Series features realistic textures and irregularities of this beautiful natural stone. Available in five colours and two finishes suitable for both wall and floor.

skheme®

Cleft

PRODUCT SPECIFICATIONS

SIZES	FINISHES	TILE EDGE	SLIP RATING
75x300mm	NATURAL	RECTIFIED	P3 Pendulum
300X600mm	NATURAL	RECTIFIED	P3 Pendulum
600x600mm	NATURAL	RECTIFIED	P3 Pendulum
300X600mm	GRIP	RECTIFIED	P5 Pendulum

FORMATS

300x600mm

75x300mm

600x600mm
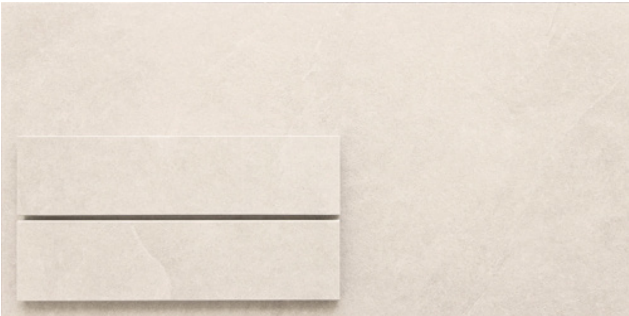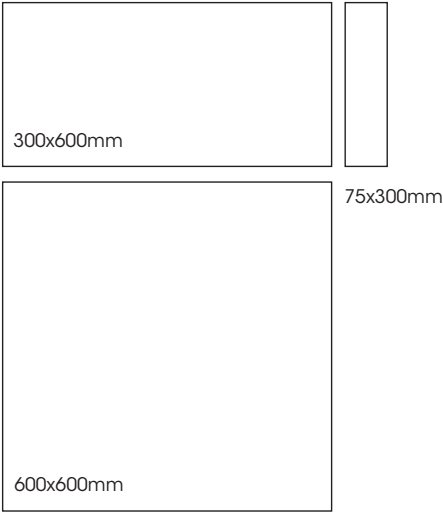
TAWN NATURAL

TAWN GRIP


PEARL NATURAL

SKY GREY NATURAL

SKY GREY GRIP

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

skheme®

Cleft

PRODUCT SPECIFICATIONS

SIZES	FINISHES	TILE EDGE	SLIP RATING
75x300mm	NATURAL	RECTIFIED	P3 Pendulum
300X600mm	NATURAL	RECTIFIED	P3 Pendulum
600x600mm	NATURAL	RECTIFIED	P3 Pendulum
300X600mm	GRIP	RECTIFIED	P5 Pendulum

FORMATS

300x600mm

75x300mm

600x600mm
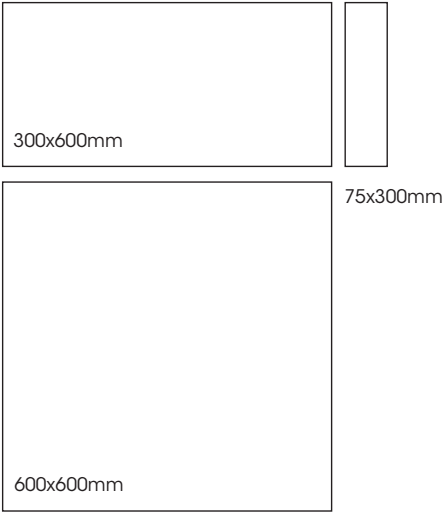
MIDNIGTH ASH NATURAL

MIDNIGTH ASH GRIP

HAMPSHIRE NATURAL

HAMPSHIRE GRIP

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

skheme®

Cleft

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

skheme®

Cleft

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

skheme®

Cleft

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

skheme®

Cleft

TECHNICAL DATA

	technical characteristics	test method	required values	result
	water absorption	ISO 10545-3	≤0.5%	≤0.4%
	modulus of rupture	ISO 10545-4	≥ 35 N/mm2	compliant
	surface quality	ISO 10545-2	Complies	≥95%
	thermal shock resistance	ISO 10545-9	Complies	compliant
	deep abrasion resistance	ISO 10545-6	≤ 1100	compliant
	chemical resistance	ISO 10545-13	Declared value	compliant
	resistance to frost	ISO 10545-12	Resistant	compliant
	staining resistance	ISO 10545-14	Minimum Class 3	compliant

CERTIFICATIONS

ISO 14001:2015 specifies the requirements for an environmental management system that an organization can use to enhance its environmental performance. ISO 14001:2015 is intended for use by an organization seeking to manage its environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability.

Please note that all products must be fabricated using score & snap method and/or wet cutting in conjunction with AS/NZS 1716:2012, AS/NZS 1715:2009, AS/NZS 60335.2.69:2017" For more information please refer to: https://www.safework.nsw.gov.au

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.