

Aspley



PRODUCT TYPE: Colour-bodied porcelain

COLOURS: Pearl, Tawn, Greige, Gris and Grafito

SIZES: 300x300mm, 300x600mm, 600x600mm, 600x1200mm, 600x600x20mm and 1200x2700x6mm


FINISHES/USAGE: Rectified edges

AESTHETIC QUALITIES: Matt and Grip/Wall & Floor

TECHNICAL INFO: Ceppo di Gre inspired porcelain

P3 Pendulum Slip Rating (Matt)
P2 Pendulum Slip Rating (6x12 Matt)
P5 Pendulum Slip Rating (Grip)
P5 Pendulum Slip Rating (Grip Paver)
More technical data on the last page

VARIATION:



V2



Inspired by Ceppo di Gre, ASPLEY features the beautiful multi-colours of fragmented pebbles the natural stone is known for. Available in five colours and a wide range of sizes including a large 600x1200mm format and 20mm pavers.


Aspley

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
300x300mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	MATT	P3 Pendulum	RECTIFIED
600x600mm	MATT	P3 Pendulum	RECTIFIED
600x1200mm	MATT	P2 Pendulum	RECTIFIED
1200x2700x6mm	MATT SLAB	-	RECTIFIED
300x600mm	GRIP	P5 Pendulum	RECTIFIED
600x600mm	GRIP	P5 Pendulum	RECTIFIED
600x600x20mm	GRIP PAVER	P5 Pendulum	RECTIFIED

*1200x2700x6mm is only available in Pearl and Greige

FORMATS

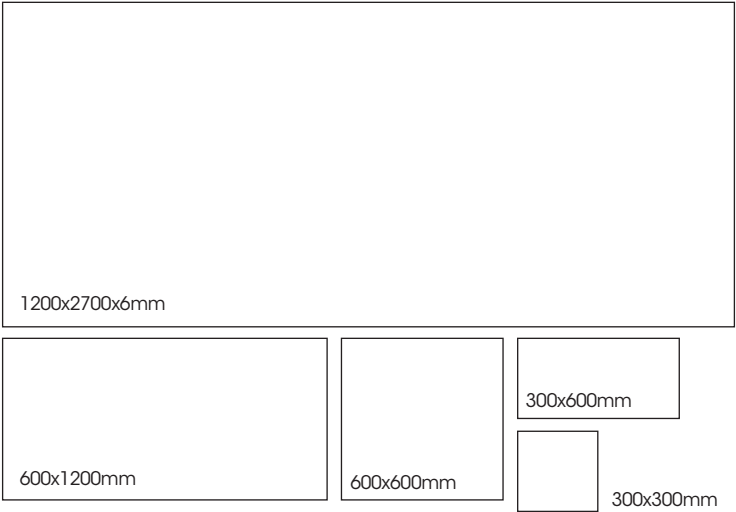

PEARL




TAWN



GREIGE



GRIS

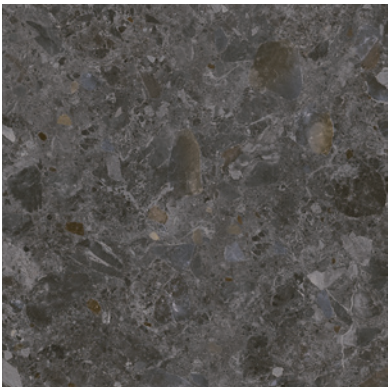

GRAFITO

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.


Aspley

PEARL VARIATION



Aspley

TAWN VARIATION

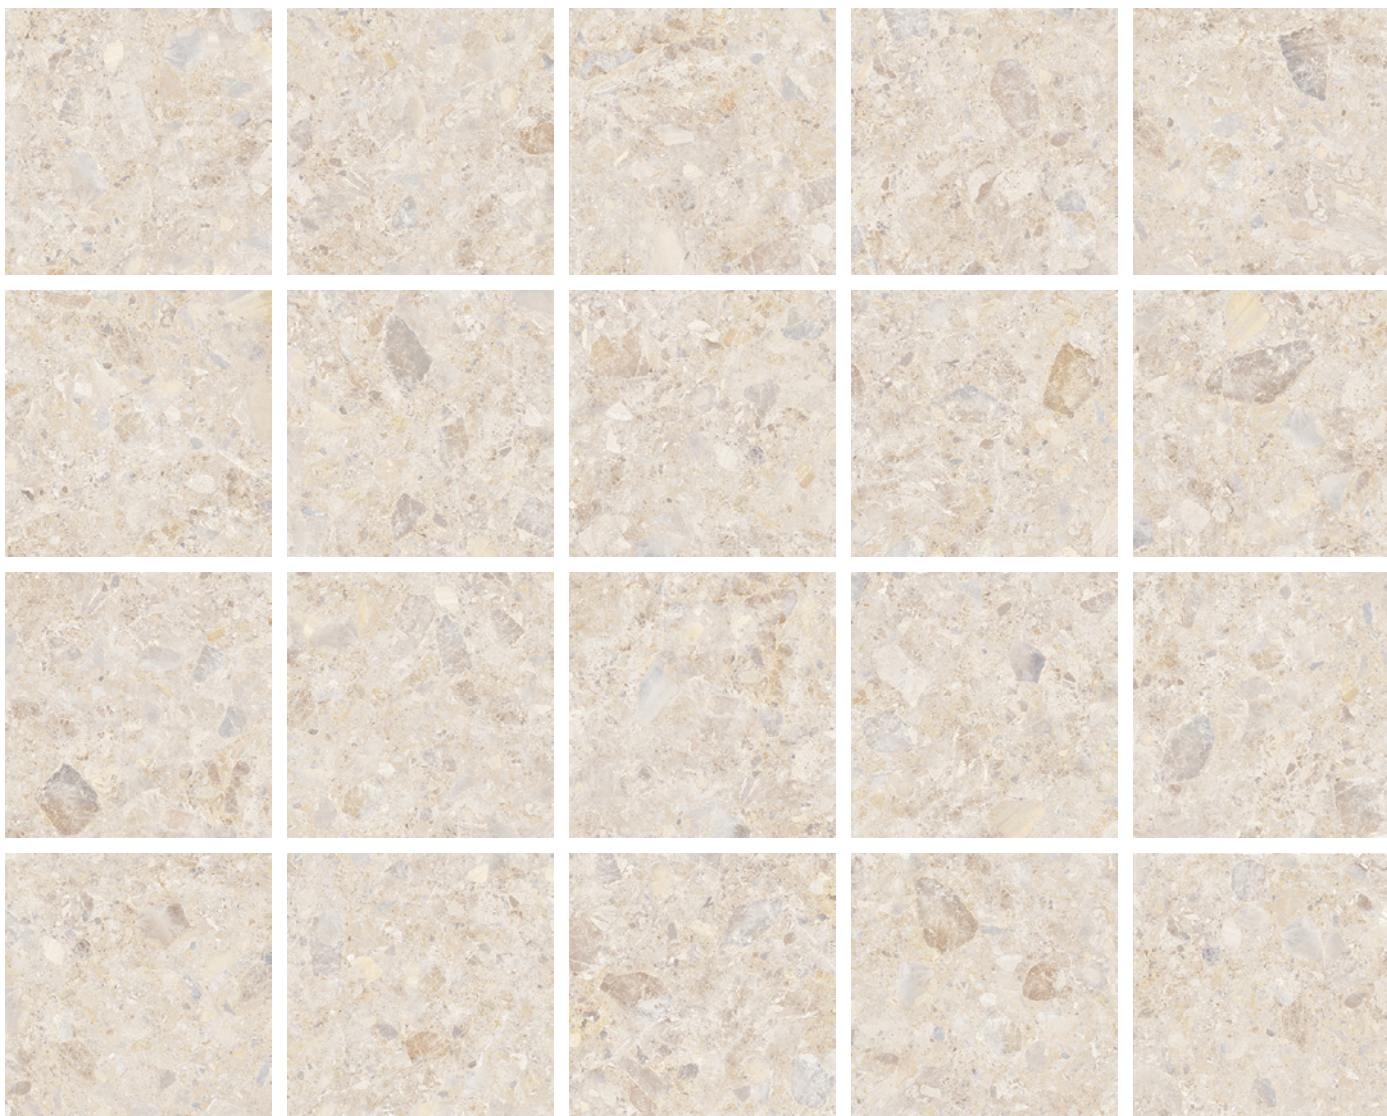


Aspley

GREIGE VARIATION




Aspley

GRIS VARIATION

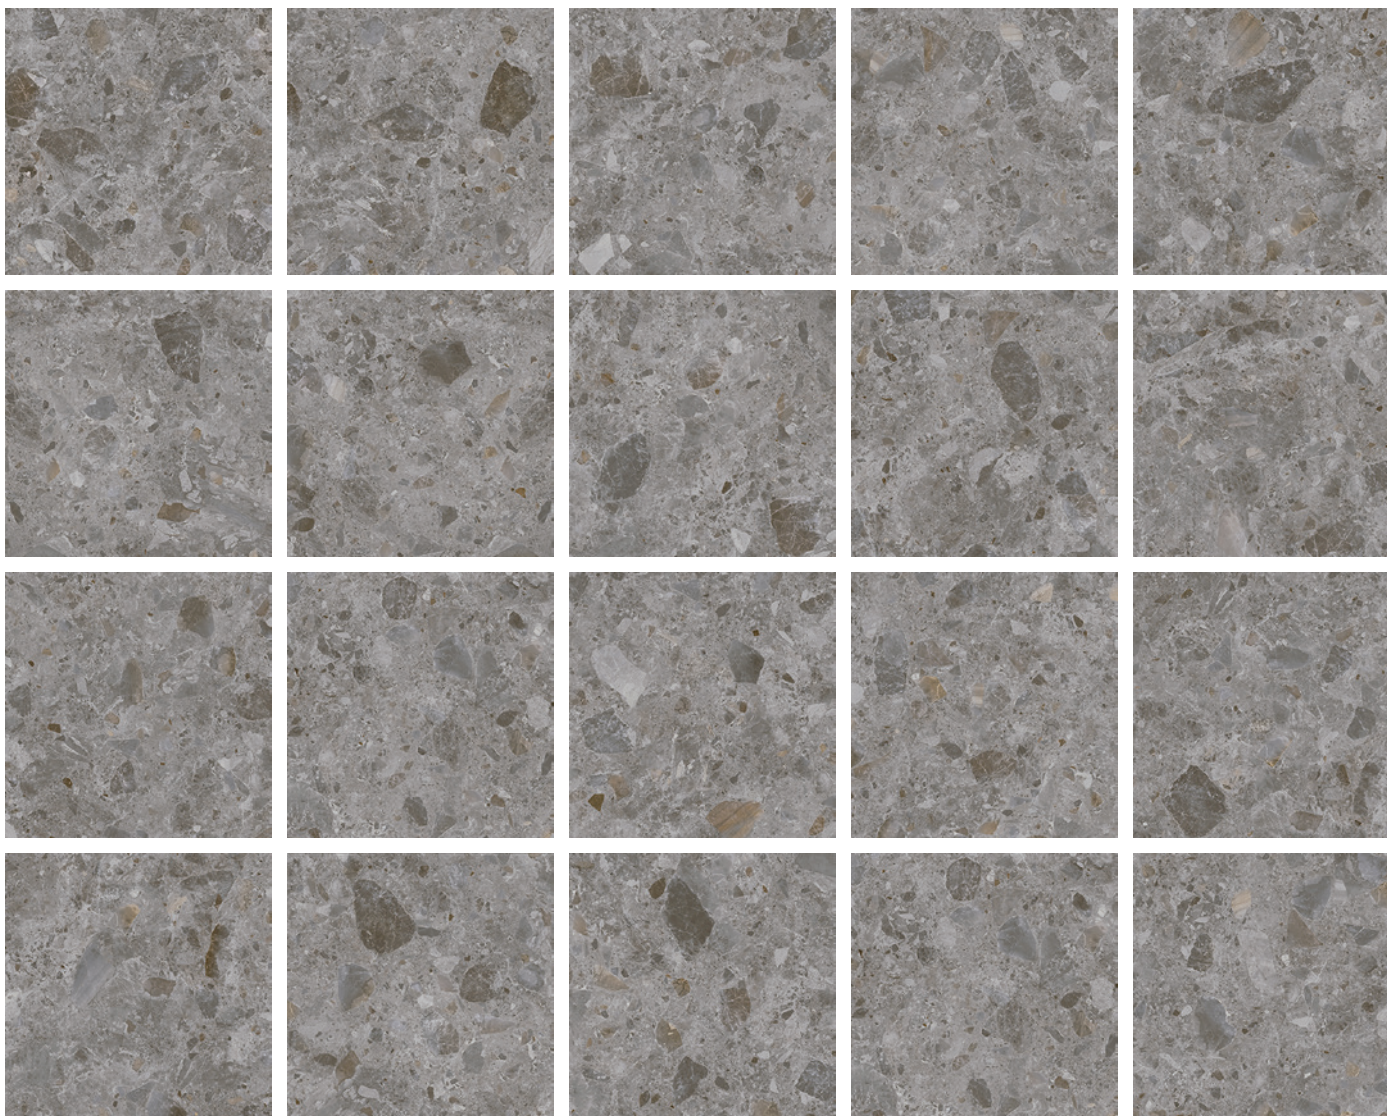

Aspley

GRAFITO VARIATION

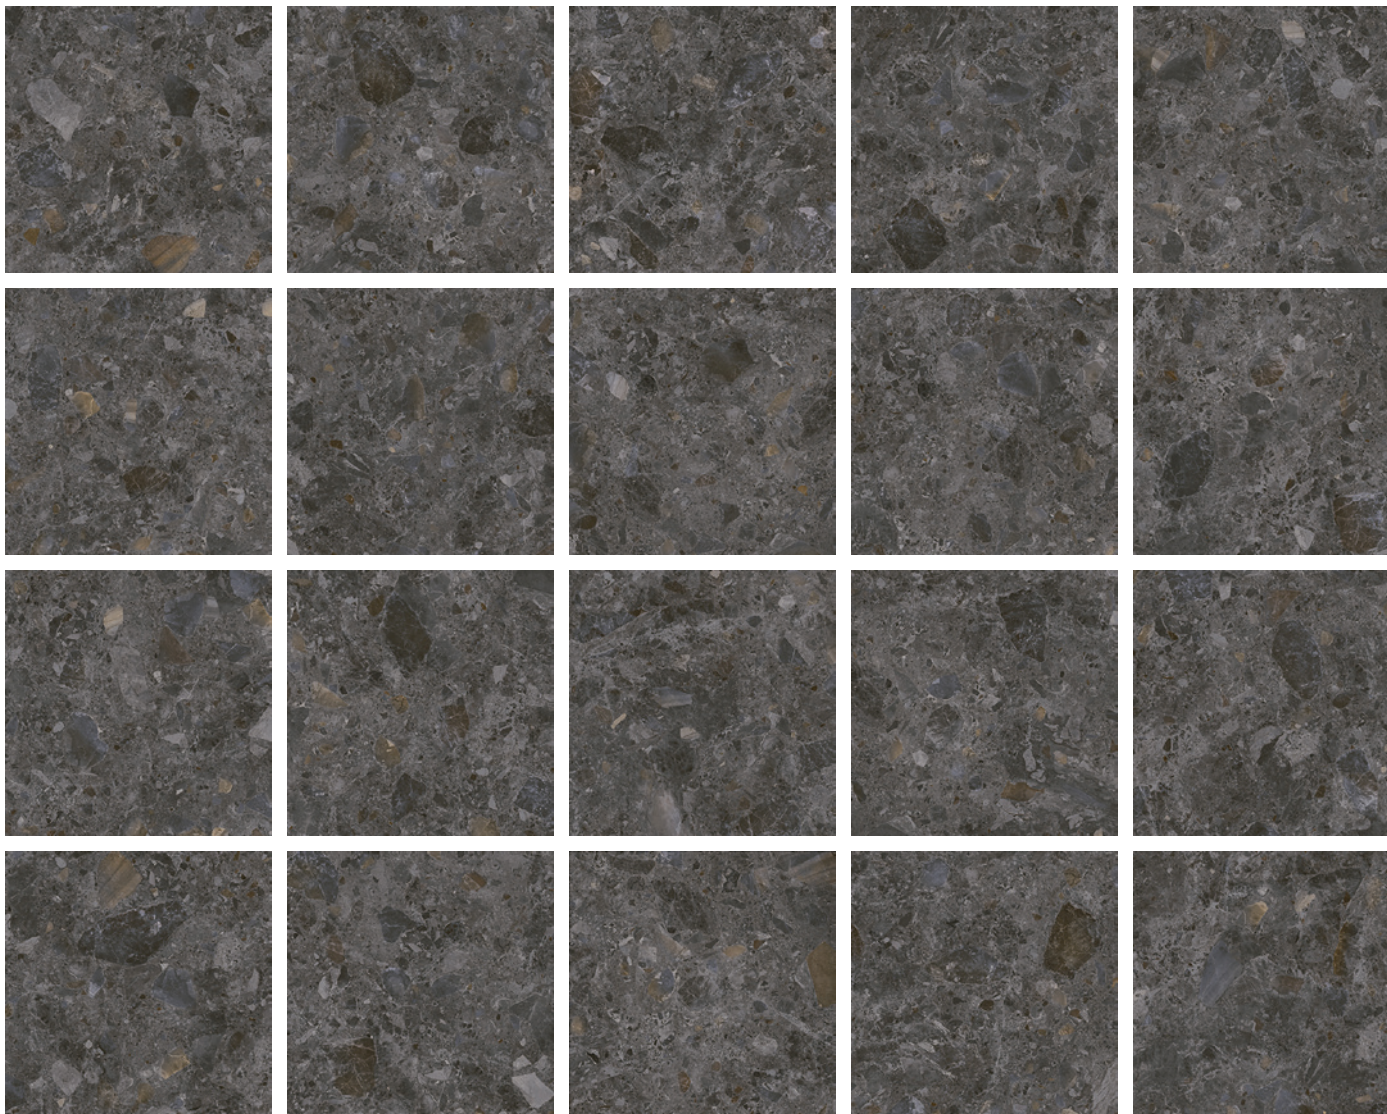

Aspley









Aspley










Aspley



TECHNICAL DATA - TILE

	technical characteristics	test method	required values	result
	water absorption	ISO 10545-3	≤0.5%	≤0.5%
	breaking strength	ISO 10545-4	≥1300N	2265N
	shock resistance	ISO 10545-11	Pass	Pass
	chemical resistance	ISO 10545-13	Declared value	Pass
	resistance to frost	ISO 10545-12	Resistant	Pass
	staining resistance	ISO 10545-14	Minimum Class 3	Pass

TECHNICAL DATA - PAVER

	technical characteristics	test method	result
	water absorption	ISO 10545-3	≤0.5%
	breaking strength	ISO 10545-4	8500N
	max warpage	ISO 10545-2	±2.0mm
	max edge curvature	ISO 10545-2	±2.0mm
	chemical resistance	ISO 10545-13	Pass
	resistance to frost	ISO 10545-12	Pass
	staining resistance	ISO 10545-14	Pass

Porcelain Pavers and Coping tiles must be installed to Australian Standards (AS 3958.1, AS 3958.2 & AS 3727-2016) using correct procedures and products such as Mapei Ultralite S1.
No spot fixing under any circumstances.

Please note that all products must be fabricated using score & snap method and/or wet cutting in conjunction with AS/NZS 1716:2012, AS/NZS 1715:2009, AS/NZS 60335.2.69:2017* For more information please refer to: <https://www.safework.nsw.gov.au>

CERTIFICATIONS



ISO 14001:2015 specifies the requirements for an environmental management system that an organization can use to enhance its environmental performance. ISO 14001:2015 is intended for use by an organization seeking to manage its environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability.

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.