

Okei



Made in Spain, OKEI is a high-performance sintered stone that is produced using highly advanced ultra-compaction techniques allowing this material to be used for an endless variety of horizontal and decorative applications.

PRODUCT TYPE: 6mm and 12mm porcelain and ceramic slabs

COLOURS: White, Light Stone, Fawn Stone, Cote D'Azur, Venatino, Lavastone, Lamport and Forde


SIZES: 900x2700mm, 1200x2700x6mm and 1600x3240x12mm
Rectified edges

FINISHES/USAGE: Matt, Brushed and Satin/Wall and Floor

AESTHETIC QUALITIES: Stone and Marble look slabs

TECHNICAL DATA: More information on last page

ORIGIN: Spain

VARIATION: 
V2

CERTIFICATIONS:




Okei

PRODUCT SPECIFICATIONS


SIZES	FINISHES	SLIP RATING	TILE EDGE
900x2700x6mm	SATIN	-	RECTIFIED

*Please note the White Okei is ceramic base. All other slabs are porcelain

FORMATS



900x2700x6mm



WHITE

Okei

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
1200x2700x6mm	MATT	-	RECTIFIED
1600x3420x12mm	MATT	-	RECTIFIED

FORMATS




LIGHT STONE

Okei

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
1200x2700x6mm	MATT	-	RECTIFIED

FORMATS

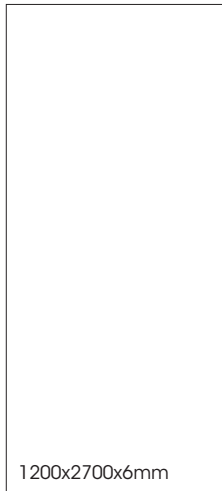


FAWN STONE

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
1200x2700x6mm	BRUSHED	-	RECTIFIED
1600x3420x12mm	BRUSHED	-	RECTIFIED

FORMATS


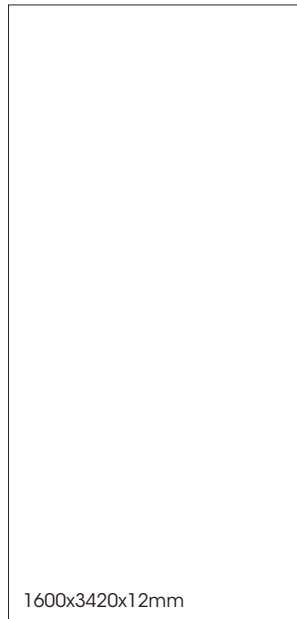


COTE D'AZUR*

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
1600x3420x12mm	BRUSHED	-	RECTIFIED

FORMATS

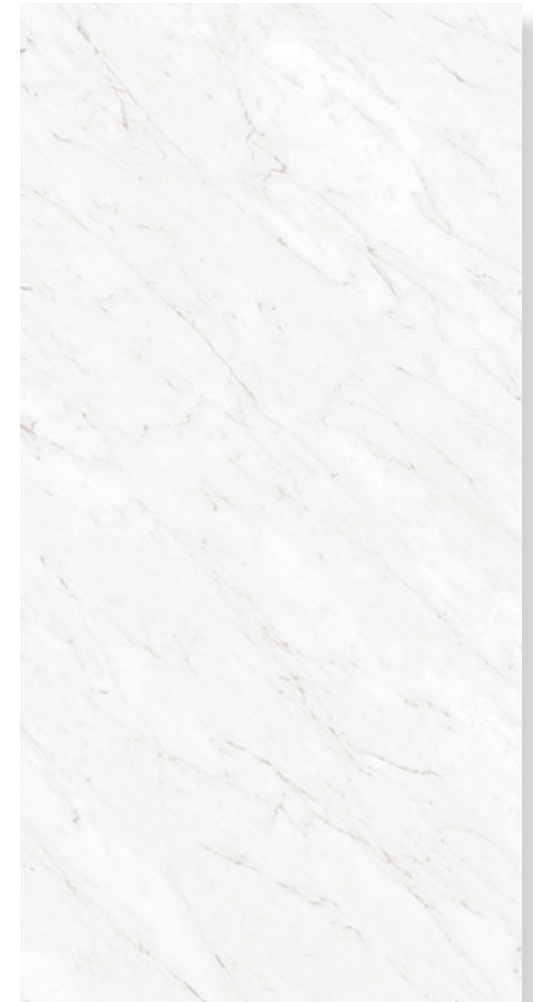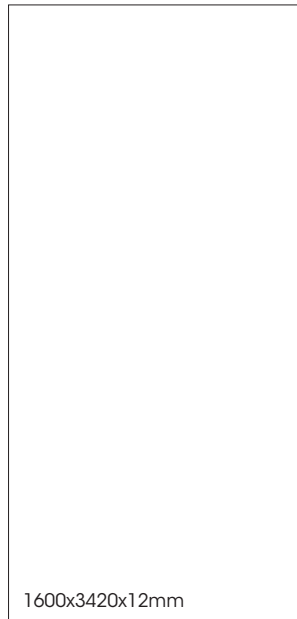


VENATINO

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
1600x3420x12mm	BRUSHED	-	RECTIFIED

FORMATS

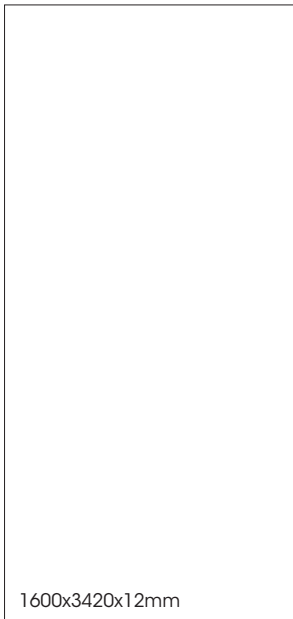



LAVASTONE

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
1200x2700x6mm	MATT	-	RECTIFIED

*Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.

FORMATS

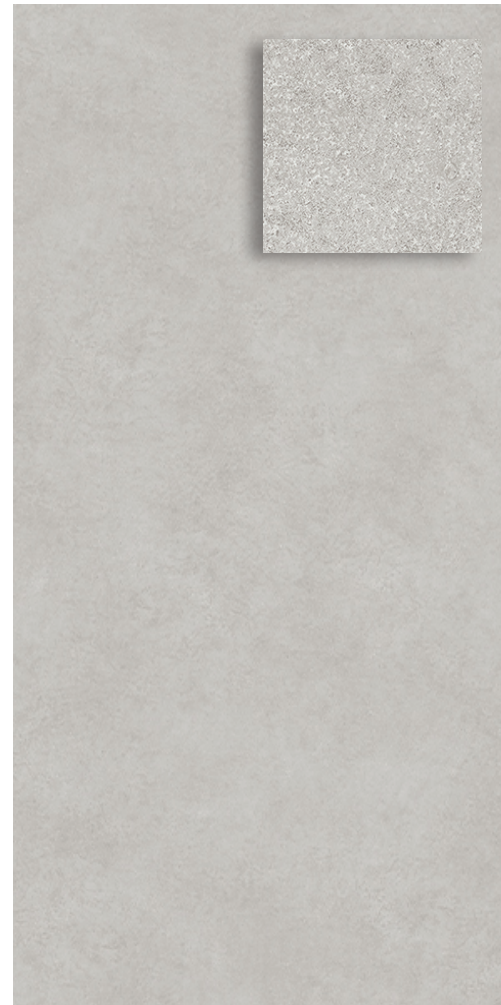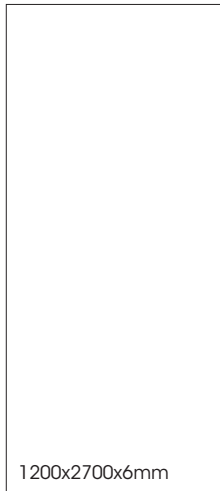

LAMPORT



FORDE

COTE D'AZUR

Okei



VENATINO

Okei



LIGHT STONE

Okei



LAVASTONE

Okei













Okei



Okei



TECHNICAL DATA

	technical characteristics	test method	required values	result
	water absorption	ISO 10545-3	≤0.5%	≤0.1% porcelain >10% ceramic
	modulus of rupture	ISO 10545-4	≥35	≥50 N/mm ² porcelain ≥12 N/mm ² ceramic
	thermal shock resistance	ISO 10545-9	Pass	Pass
	abrasion resistance	ISO 10545-7	PEI 3	PEI 3
	deep abrasion resistance	ISO 10545-6	<102mm ³	<102mm ³
	chemical resistance	ISO 10545-13	GA	GA
	stain resistance	ISO 10545-14	Class 5	Class 5
	resistance to frost	ISO 10545-12	resistant	resistant

CERTIFICATIONS



US GREEN BUILDING COUNCIL, the association of top players working to transform the building market towards sustainability and to build liveable communities. GBC US members promote environmental, economic and social responsibility, innovating buildings in terms of engineering, design, manufacturing and use.