

Tibet



PRODUCT TYPE: Glazed Porcelain Floor Tile

COLOURS: Pearl, Greige, Gris and Grafito


SIZES: 60x200mm, 300x300mm, 300x600mm, 400x600mm Paver Coping, 600x600mm, 600x1200mm, 600x600x20mm Paver, 700x800mm Crazy Pave and 1200x2700x6mm

FINISHES/USAGE: Rectified edges
Matt and Grip/Floor and wall

AESTHETIC QUALITIES: Mixed Stone look

TECHNICAL INFO: P3 Pendulum slip rating (Matt)
P5 Pendulum slip rating (Grip)
P5 Pendulum slip rating (Paver)
More technical info on the last page

VARIATION:



V3

CERTIFICATIONS:



TIBET realistically represents a mixture of stone surfaces with a focus on texture and natural colour. Available in a wide range of sizes and two finishes, TIBET can be used for both residential and commercial applications.


Tibet

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
60x200mm	MATT	P3 Pendulum	RECTIFIED
300x300mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	MATT	P3 Pendulum	RECTIFIED
600x600mm	MATT	P3 Pendulum	RECTIFIED
600x1200mm	MATT	P3 Pendulum	RECTIFIED
700x800mm	MATT CRAZY PAVE	P3 Pendulum	RECTIFIED
1200x2700x6mm	MATT SLAB	-	RECTIFIED
300x600mm	GRIP	P5 Pendulum	RECTIFIED
600x600mm	GRIP	P5 Pendulum	RECTIFIED
600x600x20mm	GRIP PAVER	P5 Pendulum	RECTIFIED
700x800mm	GRIP CRAZY PAVE	P5 Pendulum	RECTIFIED
400x600x20mm	PAVER COPING	-	-

*600x1200mm is only available in Pearl and Gris and 700x800mm Crazy Pave is only available in Pearl and Greige. 1200x2700x6mm is only available in Pearl.

FORMATS

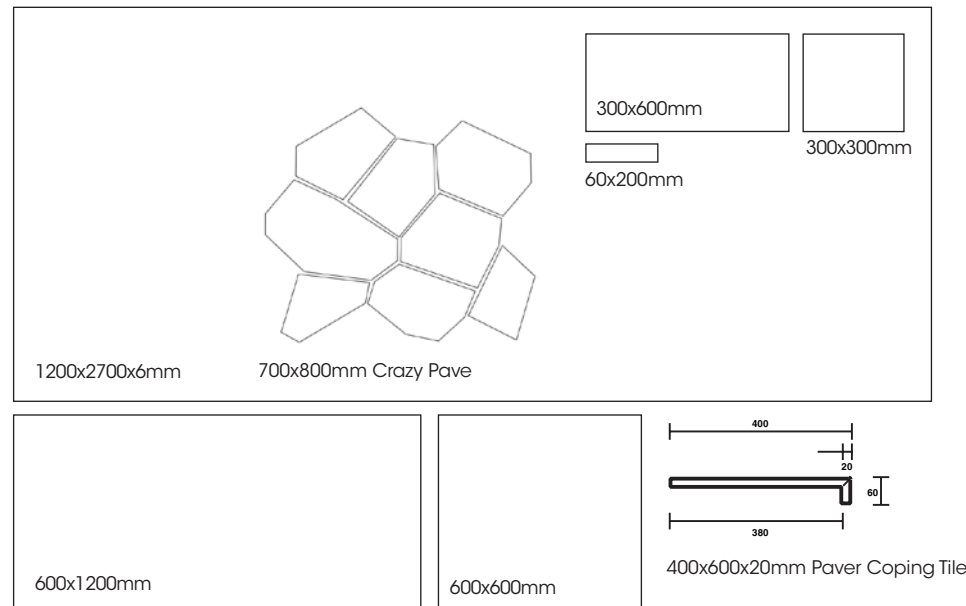

PEARL



GREIGE



GRIS




GRAFITO

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

Tibet


CRAZY PAVE LAYING

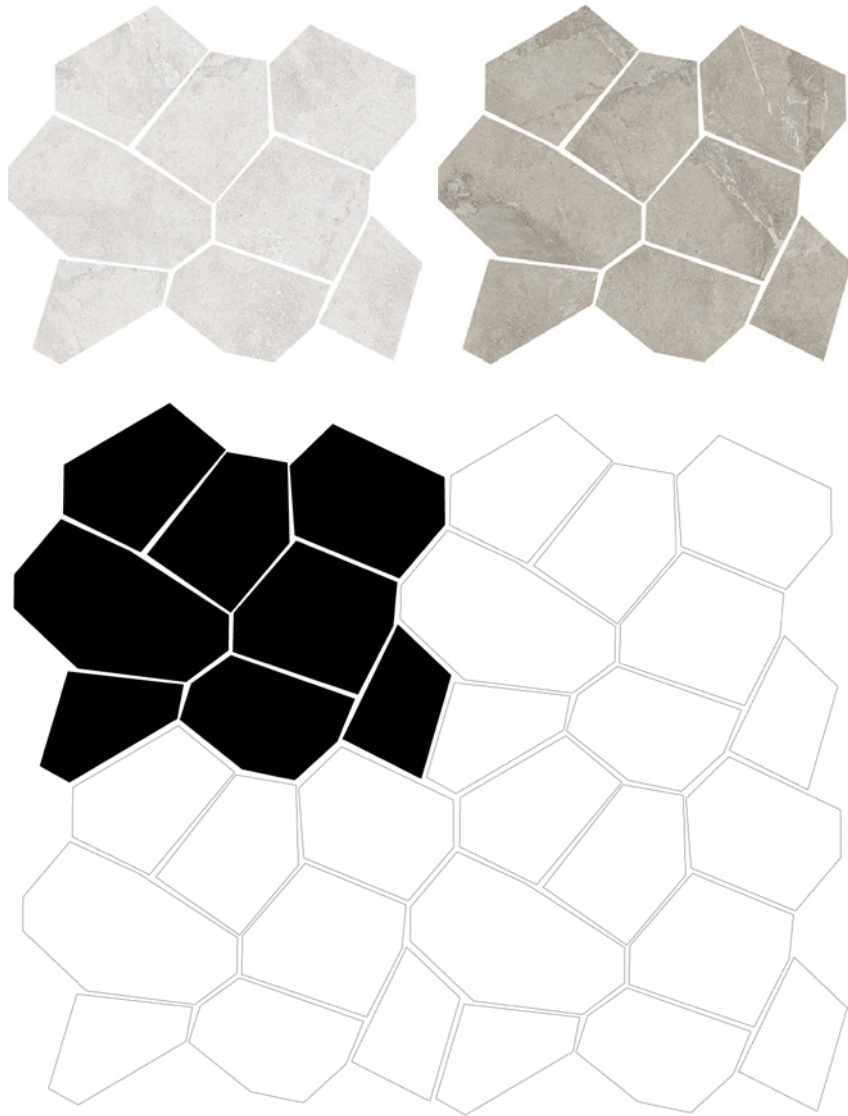

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

Tibet

GRIP PAVER COPING

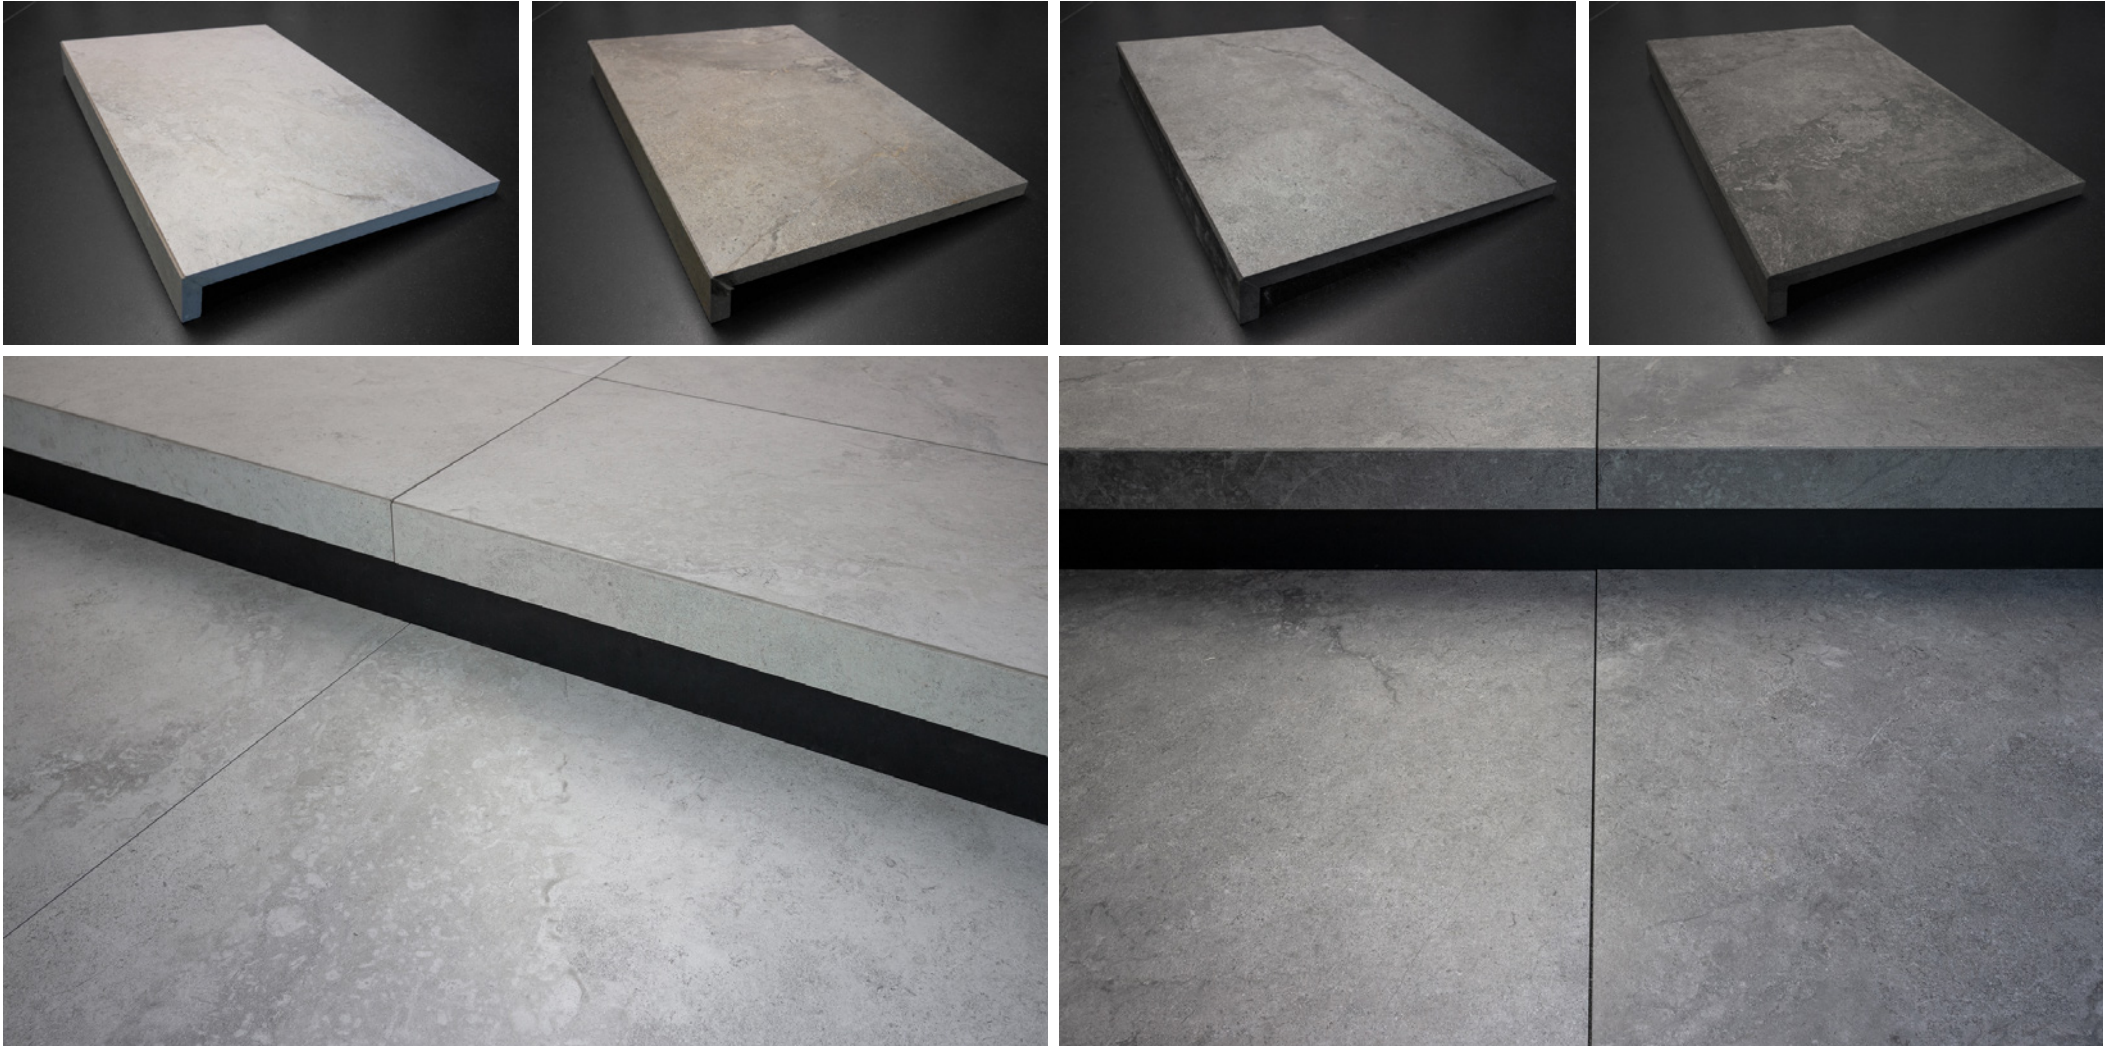

When applying full adhesion to paver coping downturns, it's essential to ensure proper surface preparation, including cleaning and drying the surfaces to be bonded. The adhesive used should be appropriate for the materials being bonded and should be applied according to the manufacturer's instructions. Full adhesion can provide a strong and durable bond between the coping pavers and the substrate. It's important to follow best practices and manufacturer recommendations when applying full adhesion to paver coping downturns to ensure a secure and long-lasting installation.

Paver coping is not suggested for fiberglass pools due to potential issues with flexibility, weight, compatibility, and installation challenges.

Tibet

BRICK FLATLAY EXAMPLES



Tibet

PEARL VARIATION



Tibet

GREIGE VARIATION



Tibet

GRIS VARIATION



Tibet

GRAFITO VARIATION



Tibet









Tibet



Tibet



TECHNICAL DATA - TILE








	technical characteristics	test method	required values	result
	water absorption	ISO 10545-3	≤0.5%	≤0.5%
	breaking strength	ISO 10545-4	≥1300N	2265N
	shock resistance	ISO 10545-11	Pass	Pass
	chemical resistance	ISO 10545-13	Declared value	Pass
	resistance to frost	ISO 10545-12	Resistant	Pass
	staining resistance	ISO 10545-14	Minimum Class 3	Pass

CERTIFICATIONS



ISO 14001:2015 specifies the requirements for an environmental management system that an organization can use to enhance its environmental performance. ISO 14001:2015 is intended for use by an organization seeking to manage its environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability.

TECHNICAL DATA - PAVER

	technical characteristics	test method	result
	water absorption	ISO 10545-3	≤0.5%
	breaking strength	ISO 10545-4	12061N
	max warpage	ISO 10545-2	±2.0mm
	max edge curvature	ISO 10545-2	±2.0mm
	chemical resistance	ISO 10545-13	Pass
	resistance to frost	ISO 10545-12	Pass
	staining resistance	ISO 10545-14	Pass

CERTIFICATIONS



ISO 14001:2015 specifies the requirements for an environmental management system that an organization can use to enhance its environmental performance. ISO 14001:2015 is intended for use by an organization seeking to manage its environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability.

Porcelain Pavers and Coping tiles must be installed to Australian Standards (AS 3958.1, AS 3958.2 & AS 3727-2016) using correct procedures and products such as Mapei Ultralite S1.
 No spot fixing under any circumstances.

