

Pixel



PRODUCT TYPE: Unglazed Porcelain

COLOURS: Light Grey, Dark Grey, Antracite and Black


SIZES: 100x100mm, 100x200mm Cove, 200x200mm and 300x300mm
Non-Rectified edges

FINISHES/USAGE: Matt
Floor and wall

AESTHETIC QUALITIES: Commercial floor tiles

TECHNICAL INFO: P3 Pendulum Slip Rating (Black only)
P4 Pendulum Slip Rating (Matt)
More technical info on the last page

VARIATION:



V1

PIXEL is our range of unglazed floor tiles suitable for commercial areas and is available in four colourways.


Pixel

PRODUCT SPECIFICATIONS


SIZES	FINISHES	SLIP RATING	TILE EDGE
100x100mm	MATT	P4 Pendulum	NON-RECTIFIED
100x200mm	MATT COVE	-	NON-RECTIFIED
200x200mm	MATT	P4 Pendulum	NON-RECTIFIED
300x300mm	MATT	P4 Pendulum	NON-RECTIFIED

Please note Absolute Black is only available in 200x200mm and receives a P3 Pendulum Slip Rating


FORMATS

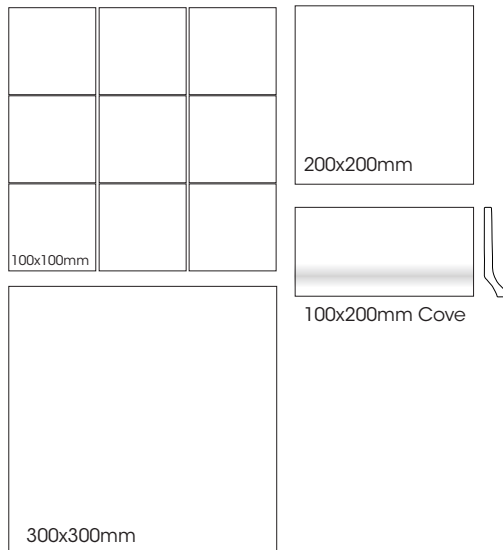


LIGHT GREY

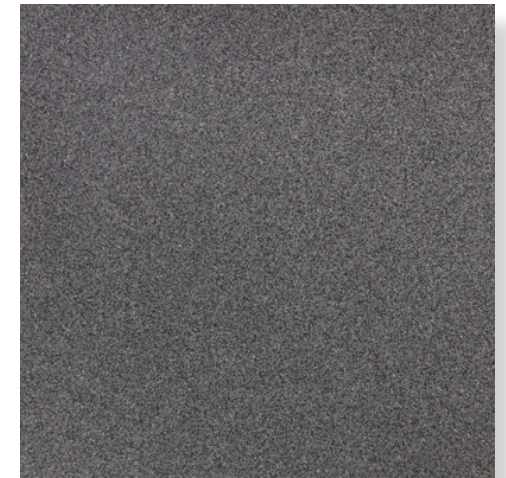

DARK GREY

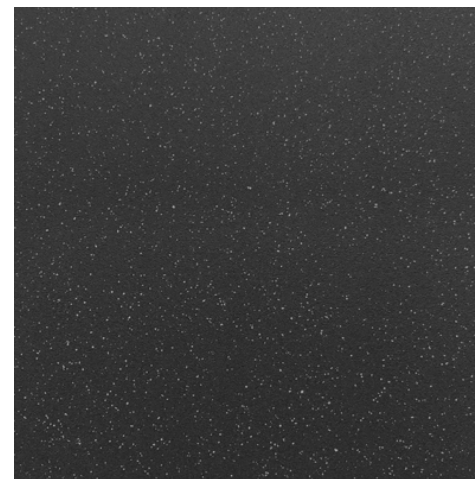

ANTRACITE

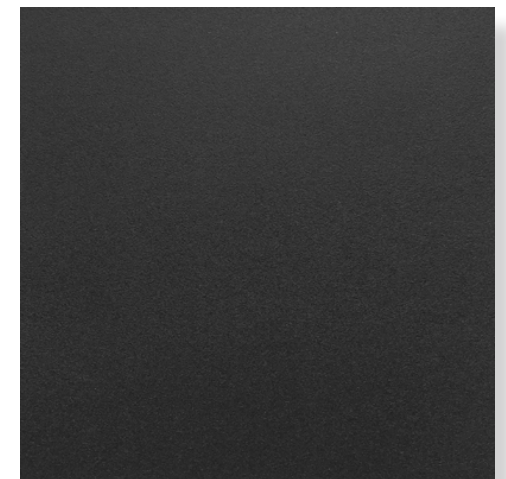

BLACK

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.


Pixel

PRODUCT SPECIFICATIONS


SIZES	FINISHES	SLIP RATING	TILE EDGE
100x100mm	MATT	P4 Pendulum	NON-RECTIFIED
100x200mm	MATT COVE	-	NON-RECTIFIED
200x200mm	MATT	P4 Pendulum	NON-RECTIFIED
300x300mm	MATT	P4 Pendulum	NON-RECTIFIED

Please note Absolute Black is only available in 200x200mm and receives a P3 Pendulum Slip Rating


FORMATS

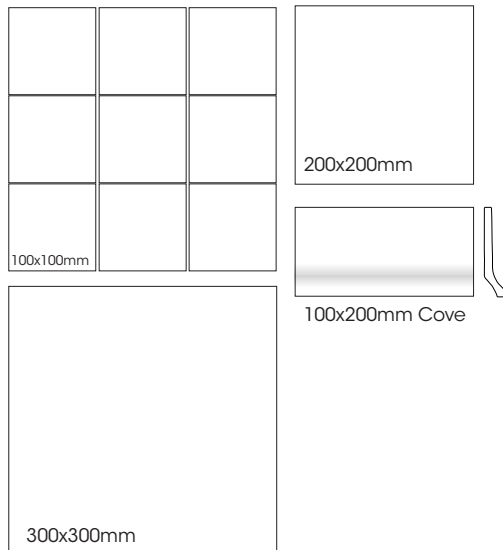

LIGHT GREY

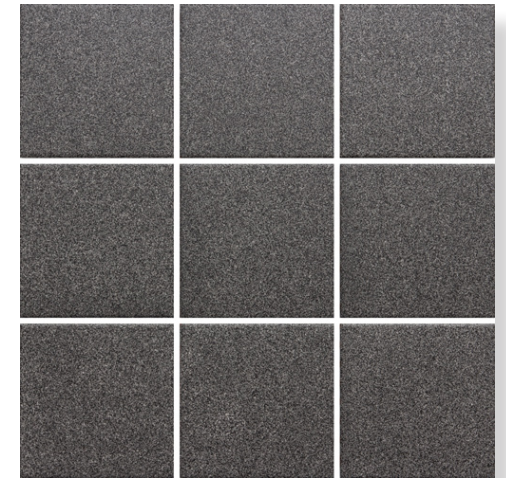

DARK GREY

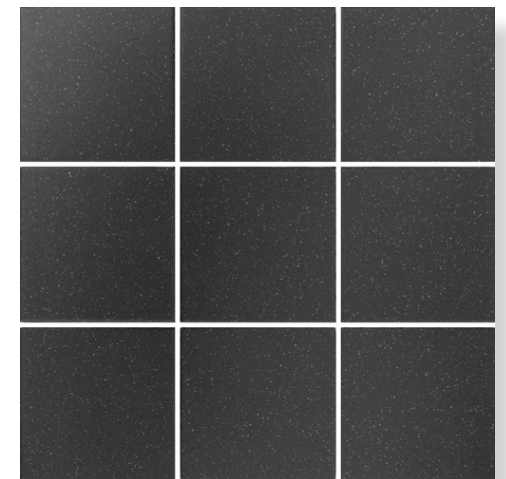

ANTRACITE


Pixel

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
100x100mm	MATT	P4 Pendulum	NON-RECTIFIED
100x200mm	MATT COVE	-	NON-RECTIFIED
200x200mm	MATT	P4 Pendulum	NON-RECTIFIED
300x300mm	MATT	P4 Pendulum	NON-RECTIFIED

Please note Absolute Black is only available in 200x200mm and receives a P3 Pendulum Slip Rating


FORMATS

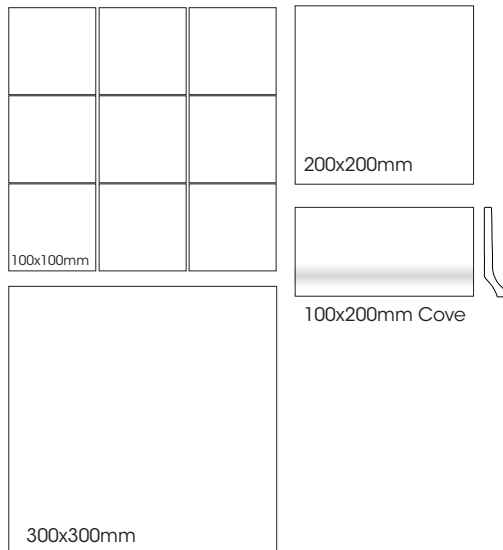

LIGHT GREY





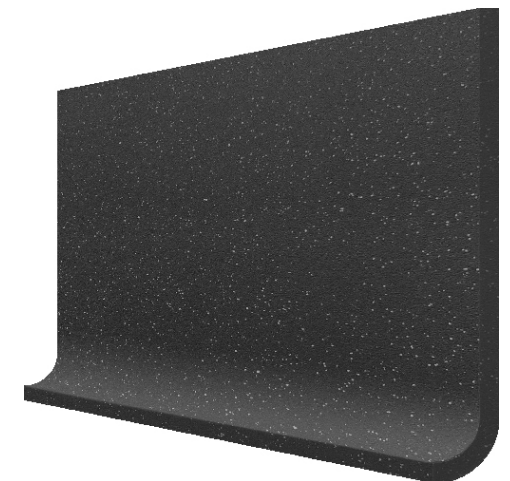



DARK GREY



ANTRACITE

TECHNICAL DATA

	technical characteristics	test method	required values	value
	Group B I a			
	water absorption	iso 10545-3	≤ 0,5%	0.21%
	bending strength	iso 10545-4	≥ 12MPA	≥ 33.5MPA
	breaking strength (S)	iso 10545-4	≥ 350 N	≥ 1785N
	abrasion resistance	iso 10545-7	Max. 175 mm ³ PEI 1-5	Class 3
	chemical resistance	iso 10545-13	Household chemicals and swimming pool salts	GA
			Low concentration of acids and alkalis	GLA
	stain resistance	iso 10545-14	Minimum Class 3	Class 5