


Terra

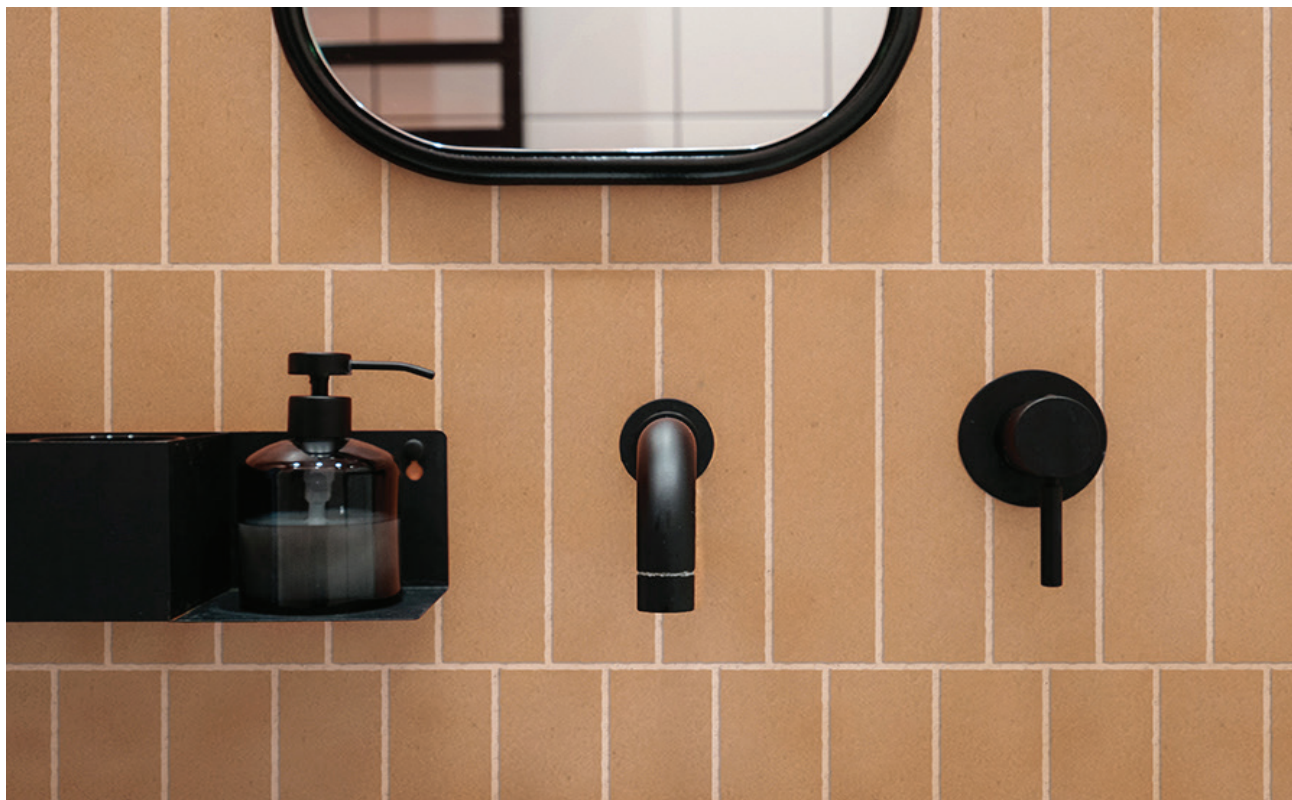

PRODUCT TYPE: Terracotta

COLOURS: Light and Dark

SIZES: 60x240mm, 150x150mm and
300x300mm
Non-Rectified edges


FINISHES/USAGE: Matt/Wall and floor

AESTHETIC QUALITIES: Natural Terracotta colours

TECHINICAL INFO: P4 Pendulum Slip Rating

- Sealing is required prior and post grouting for the **60x240mm only**.
- Dark grout colours are not recommended.
- Minimum 10mm grout joints are recommended

VARIATION:



V1

Our new terracotta collection, TERRA has arrived. Available in two beautiful colours and both square and brick format... a modern twist on a traditional look.




Terra

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATINGS	TILE EDGE
60x240mm	MATT	P4 Pendulum	NON-RECTIFIED
150x150mm	MATT	P4 Pendulum	NON-RECTIFIED
300x300mm	MATT	P4 Pendulum	NON-RECTIFIED

*Please note only Terra Dark is available in 150x150mm

FORMATS

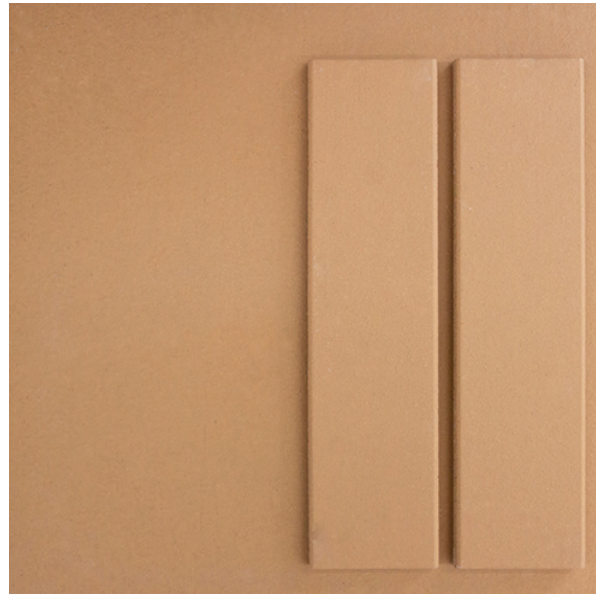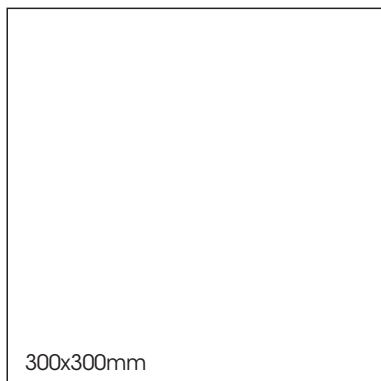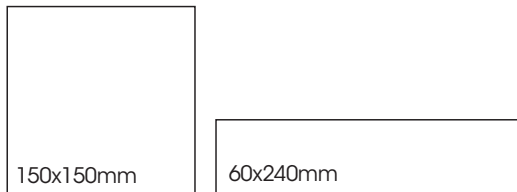

LIGHT MATT



DARK MATT*

Terra

LIFESTYLES











Terra

LIFESTYLES











Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

TECHNICAL DATA - BRICKS

	technical characteristics	test method	result
	water absorption	ISO 10545-3	5,75%
	modulus of rupture	ISO 10545-4	27,78 MPa
	impact resistance	ISO 10545-5	0,80
	coefficient of thermal expansion	ISO 10545-8	6,4
	deep abrasion resistance	ISO 10545-6	275 mm ³
	moisture expansion	ISO 10545-10	0,22 mm/m
	resistance to frost	ISO 10545-12	> 100
	surface scratch hardness	-	6 Mohs

TECHNICAL DATA - TILES

	technical characteristics	test method	result
	water absorption	ISO 10545-3	7,09%
	modulus of rupture	ISO 10545-4	20,7 MPa
	impact resistance	ISO 10545-5	0,80
	coefficient of thermal expansion	ISO 10545-8	7,4
	deep abrasion resistance	ISO 10545-6	215 mm ³
	moisture expansion	ISO 10545-10	0,228 mm/m
	resistance to frost	ISO 10545-12	> 100
	coefficient of friction	-	0,67 dry 0,58 wet