

# Tundra



**PRODUCT TYPE:** Glazed Porcelain

**COLOURS:** Pearl, Creme, Grey and Putty


**SIZES:** 75x75mm, 200x1200mm, 300x300mm,  
300x600mm 600x600mm and 600x1200mm

**FINISHES/USAGE:** Matt and Grip/Wall and Floor

**AESTHETIC QUALITIES:** Concrete look

**TECHNICAL INFO:** P3 Pendulum slip rating (Matt)  
P4 Pendulum slip rating (Grip)  
More technical information on last page

**VARIATION:**



V2

Inspired by the natural tundra stone, TUNDRA features four beautiful colours with gentle organic veining. It is available in a variety of versatile sizes and is suitable for both commercial and residential use.


# Tundra

## PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
75x75mm	MATT	P3 Pendulum	RECTIFIED
200x1200mm*	MATT	P3 Pendulum	RECTIFIED
300x300mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	MATT	P3 Pendulum	RECTIFIED
600x600mm	MATT	P3 Pendulum	RECTIFIED
600x1200mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	GRIP	P4 Pendulum	RECTIFIED

\*Size available in Pearl and Grey only

## FORMATS

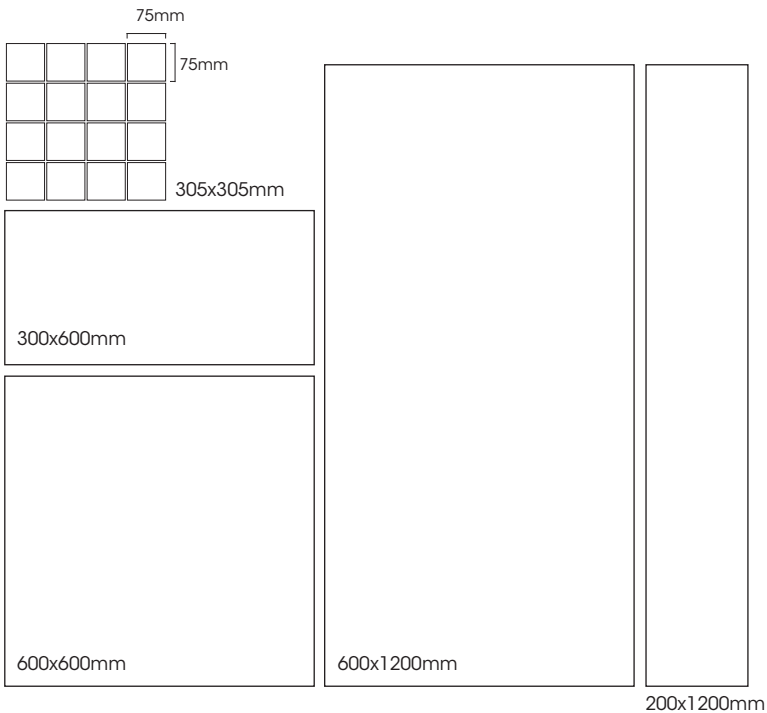

PEARL\*



CREME



GREY\*



PUTTY

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



# Tundra

## PEARL VARIATION



# Tundra


## CREME VARIATION





# Tundra

## GREY VARIATION

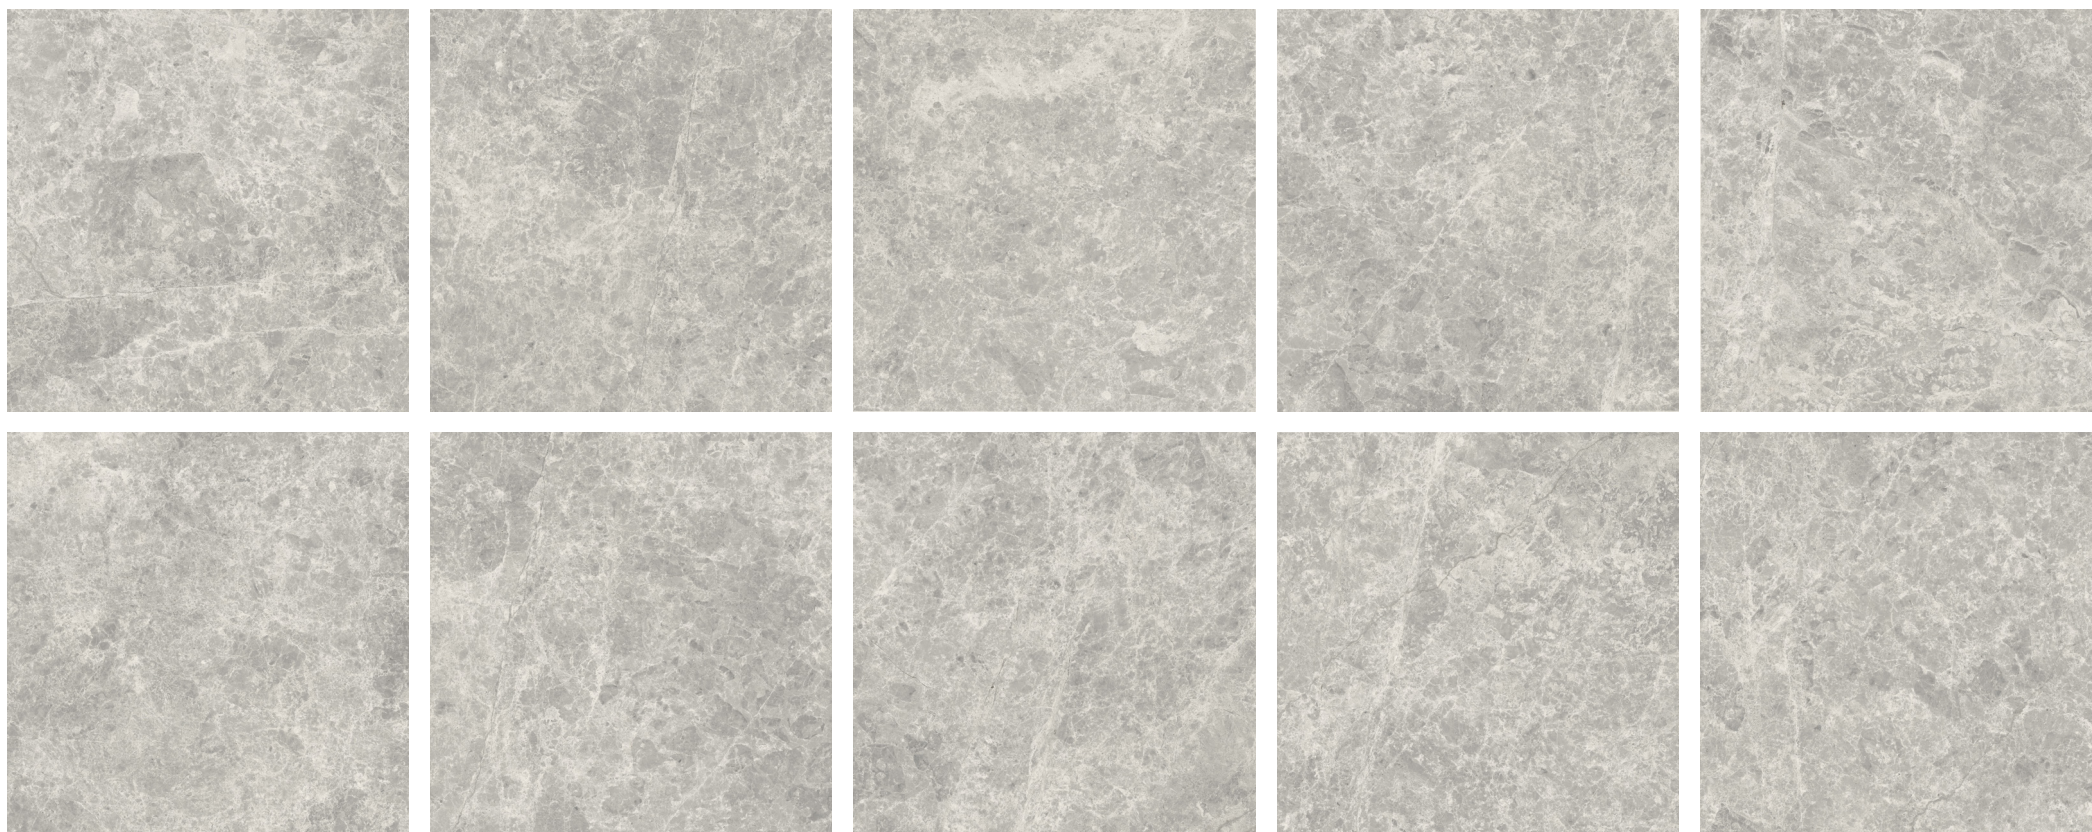



# Tundra

## PUTTY VARIATION









# Tundra





# Tundra

## TECHNICAL DATA

	technical characteristics Group B I a	test method	required values	va ue
	water absorption	iso 10545-3	≤ 0,5%	0.21%
	bending strength	iso 10545-4	≥ 12MPA	≥ 33.5MPA
	breaking strength (S)	iso 10545-4	≥ 350 N	≥ 1785N
	abrasion resistace	iso 10545-7	Max. 175 mm <sup>3</sup> PEI 1-5	Class 3
	chemical resistance	iso 10545-13	Household chemicals and swimming pool salts  Low concentration of acids and alkalis	GA  GLA
	stain resistance	iso 10545-14	Minimum Class 3	Class 5