

skheme®



kan


kan




white




pumice

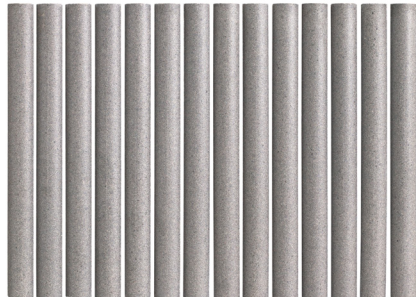


basalt

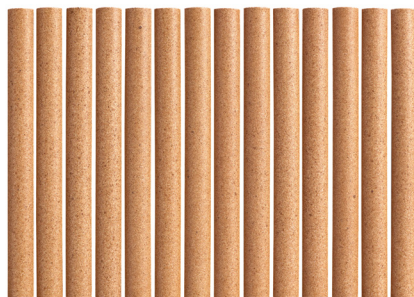


mustard

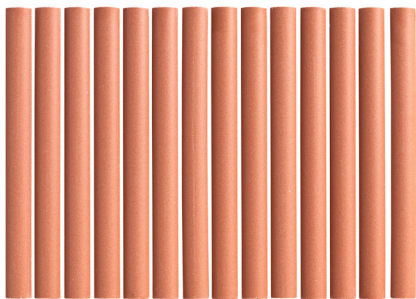

cotto

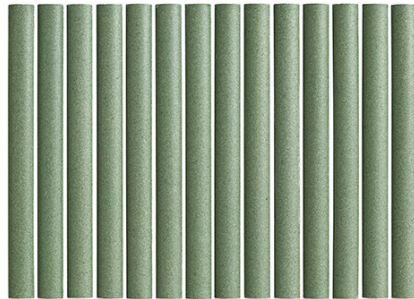

green



mosaic

20x215mm



flame resistant



3D format



mosaic



wall only



V2 variation

PRODUCT SPECIFICATIONS

	format	size	finish	thickness	slip rating	colour
	mosaic	20x215mm (215x300mm sheet)	matt	12mm	N/A	all colours
MATERIAL	unglazed porcelain					
VARIATION	V2					
TILE EDGE	rectified					

Please note that all products must be fabricated using score & snap method and/or wet cutting in conjunction with AS/NZS 1716:2012, AS/NZS 1715:2009, AS/NZS 60335.2.69:2017. For more information please refer to: <https://www.safework.nsw.gov.au>

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.


A 2/12-14 Neild Avenue Rushcutters Bay NSW 2010 | P 02 8755 2300 | W www.skheme.com | E info@skheme.com

left pictured: white
right pictured: mustard





left pictured: basalt
right pictured: green

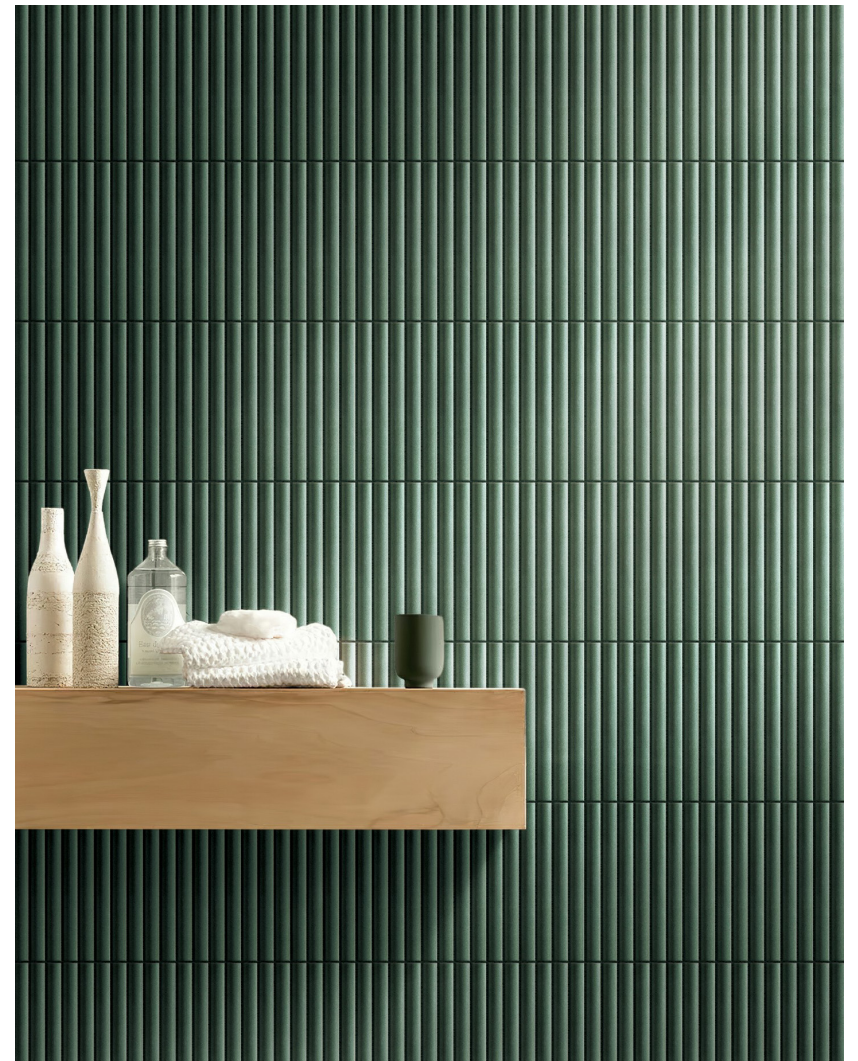

technical data

PROPERTIES	TEST METHOD	PRESCRIBED VALUES	RESULT
water absorption	ISO 10545-3	<0.5%	0.26%
modulus of rupture	ISO 10545-4	minimum 35	51.1
surface quality	ISO 10545-2	complies	100%
breaking strength	ISO 10545-4	≥ 1300 N	4361
resistance to staining	ISO 10545-14	declared value	class 5
resistance to chemicals	ISO 10545-13	minimum class B	A
scratch hardness	EN 15771	-	>6



Please note that all products must be fabricated using score & snap method and/or wet cutting in conjunction with AS/NZS 1716:2012, AS/NZS 1715:2009, AS/NZS 60335.2.69:2017. For more information please refer to: <https://www.safework.nsw.gov.au>

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

A 2/12-14 Neild Avenue Rushcutters Bay NSW 2010 | P 02 8755 2300 | W www.skheme.com | E info@skheme.com