


skheme®

57 Street & 8 Avenue


M



Exit 57 Street

pixel


pixel

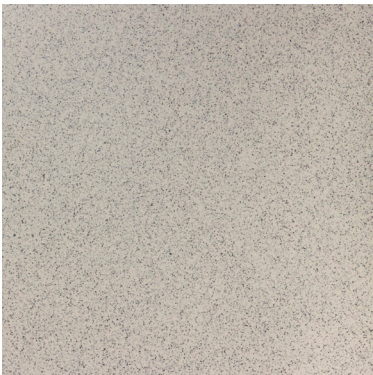


ivory grey




dark grey

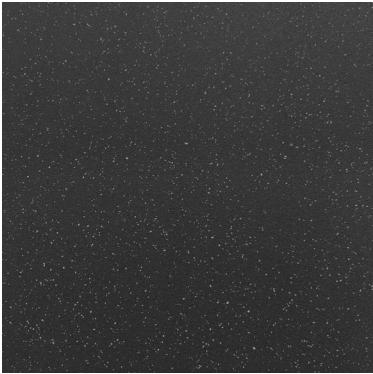


antracite

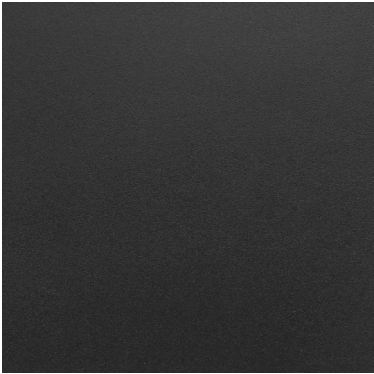

black

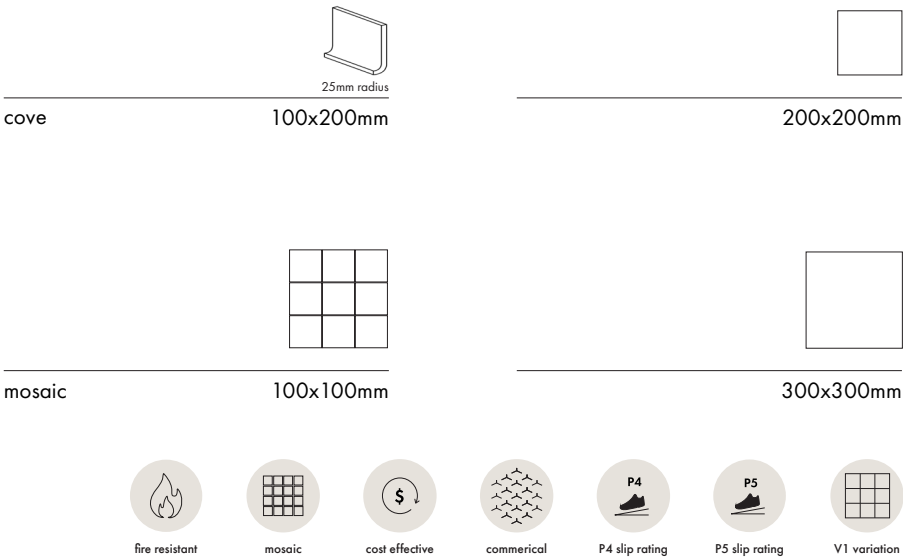


PRODUCT SPECIFICATIONS		format	size	finish	thickness	slip rating	colour
	mosaic	100x100mm	(300x300 sheet)	matt	6mm	P4	ivory grey dark grey antracite
	cove		100x200mm	matt	7mm	N/A	ivory grey dark grey antracite
	tile		200x200mm	matt	7mm	P4	all colours
	tile		200x200mm	diamond	7mm	P5	ivory grey dark grey antracite
	tile		300x300mm	matt	7mm	P4	all colours
MATERIAL		full-bodied unglazed porcelain					
VARIATION		V1					
TILE EDGE		non-rectified					

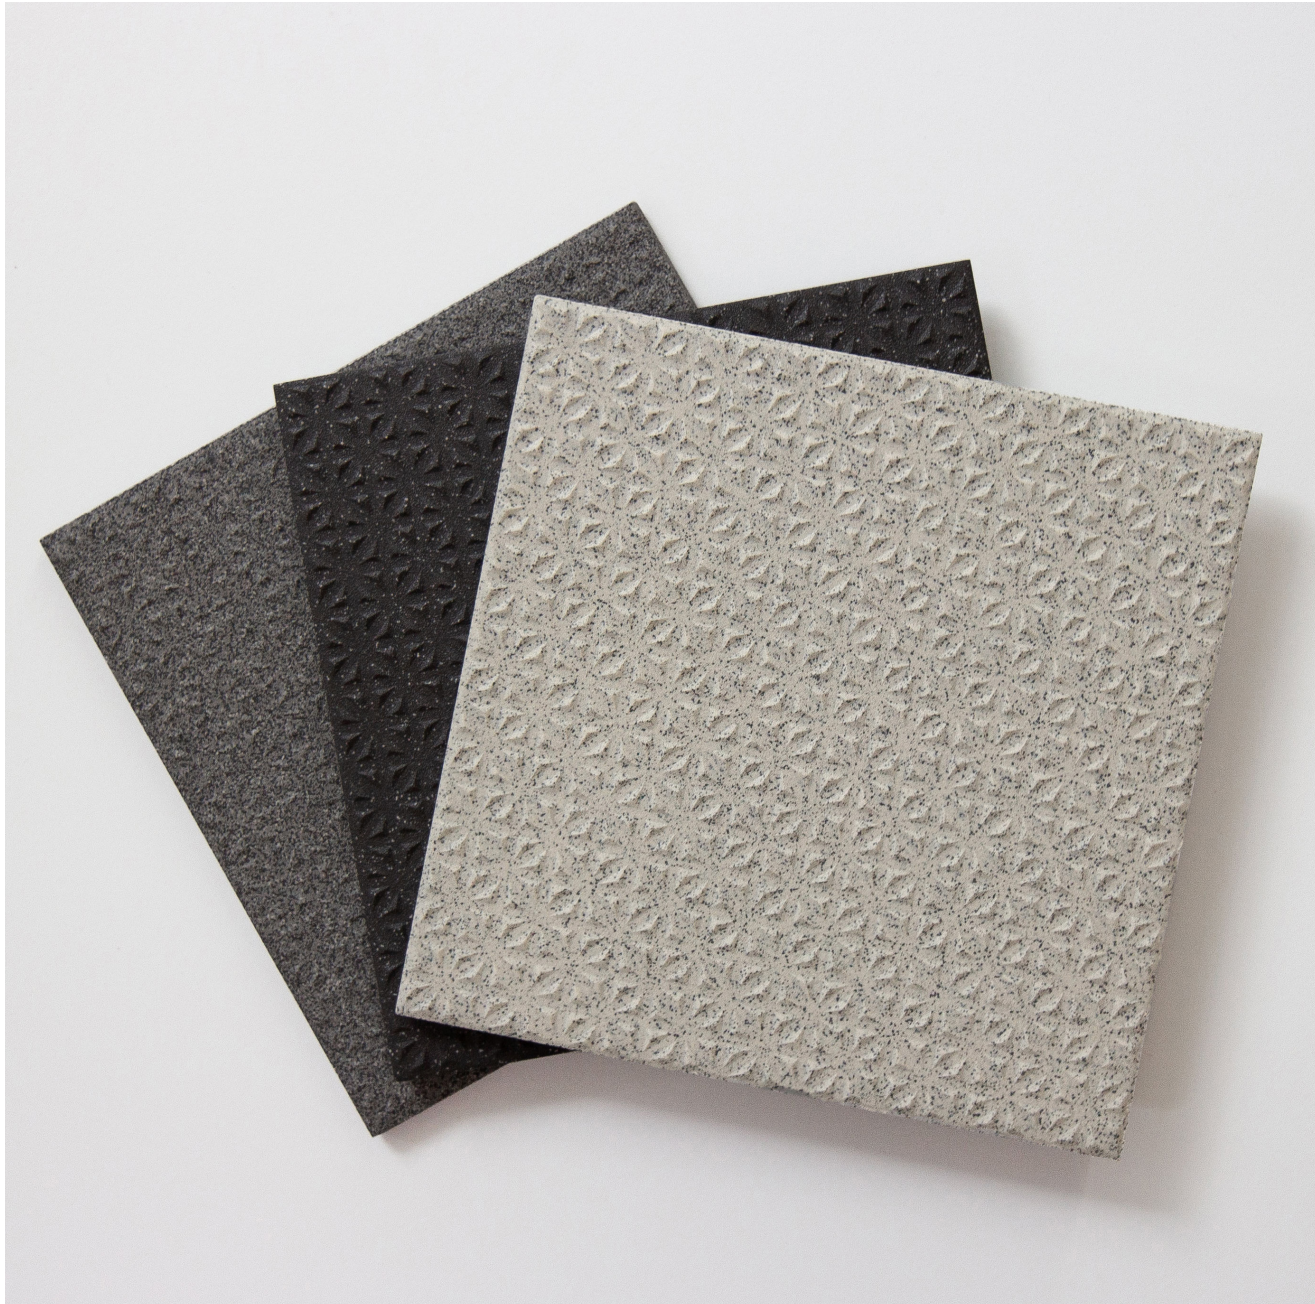

left pictured: diamond finish
right pictured: dark grey entire formats

technical data

PROPERTIES	TEST METHOD	PRESCRIBED VALUES	VALUE
water absorption	ISO 10545-3	≤0.5%	0.21%
bending strength	ISO 10545-4	≥ 12 MPA	≥ 33.5MPA
breaking strength	ISO 10545-4	≥ 350 N	≥ 1785N
abrasion resistance	ISO 10545-7	Max. 175 mm ³ PEI 1-5	class 3
resistance to chemicals	ISO 10545-13	Household chemicals & swimming pool salts	GA
		Low concentration of acids & alkalis	GLA
resistance to staining	ISO 10545-14	Minimum class 3	class 5

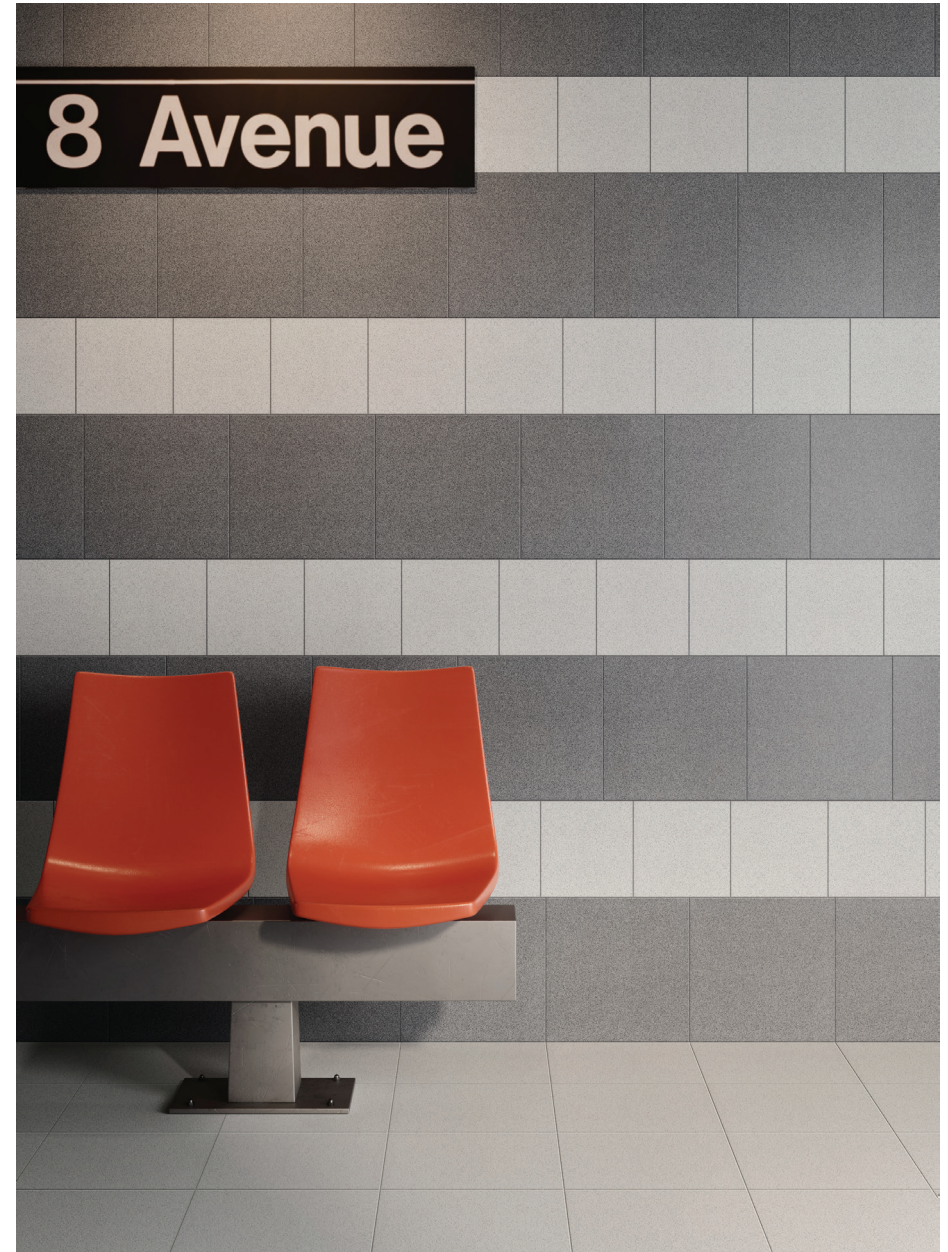

Please note that all products must be fabricated using score & snap method and/or wet cutting in conjunction with AS/NZS 1716:2012, AS/NZS 1715:2009, AS/NZS 60335.2.69:2017. For more information please refer to: <https://www.safework.nsw.gov.au>