

skheme®

valais



valais



alpine



savona



obsidian



604x1208mm



fire resistant



V3 variation

PRODUCT SPECIFICATIONS	format	work size	nominal size	finish	thickness	colour
	tile	600x1200mm	604x1208mm	brushed	8mm	all colours
MATERIAL	glazed porcelain					
VARIATION	V3					
TILE EDGE	rectified					

* Installation note: Due to 3D glazing, it is suggested to cut these tiles with a wet saw.

Colours shown in images may differ due to variations in photographic conditions and screen displays. Samples provided may not accurately reflect the exact shade or batch supplied, as variation is an inherent property of tiles and stone.

Listed sizes and thicknesses are nominal and may vary slightly from actual working dimensions.

A 2/12-14 Neild Avenue Rushcutters Bay NSW 2010 | P 02 8755 2300 | W www.skheme.com | E info@skheme.com

left pictured: obsidian
right pictured: alpine






alpine

600x1200mm | 10 faces



savona

600x1200mm | 10 faces

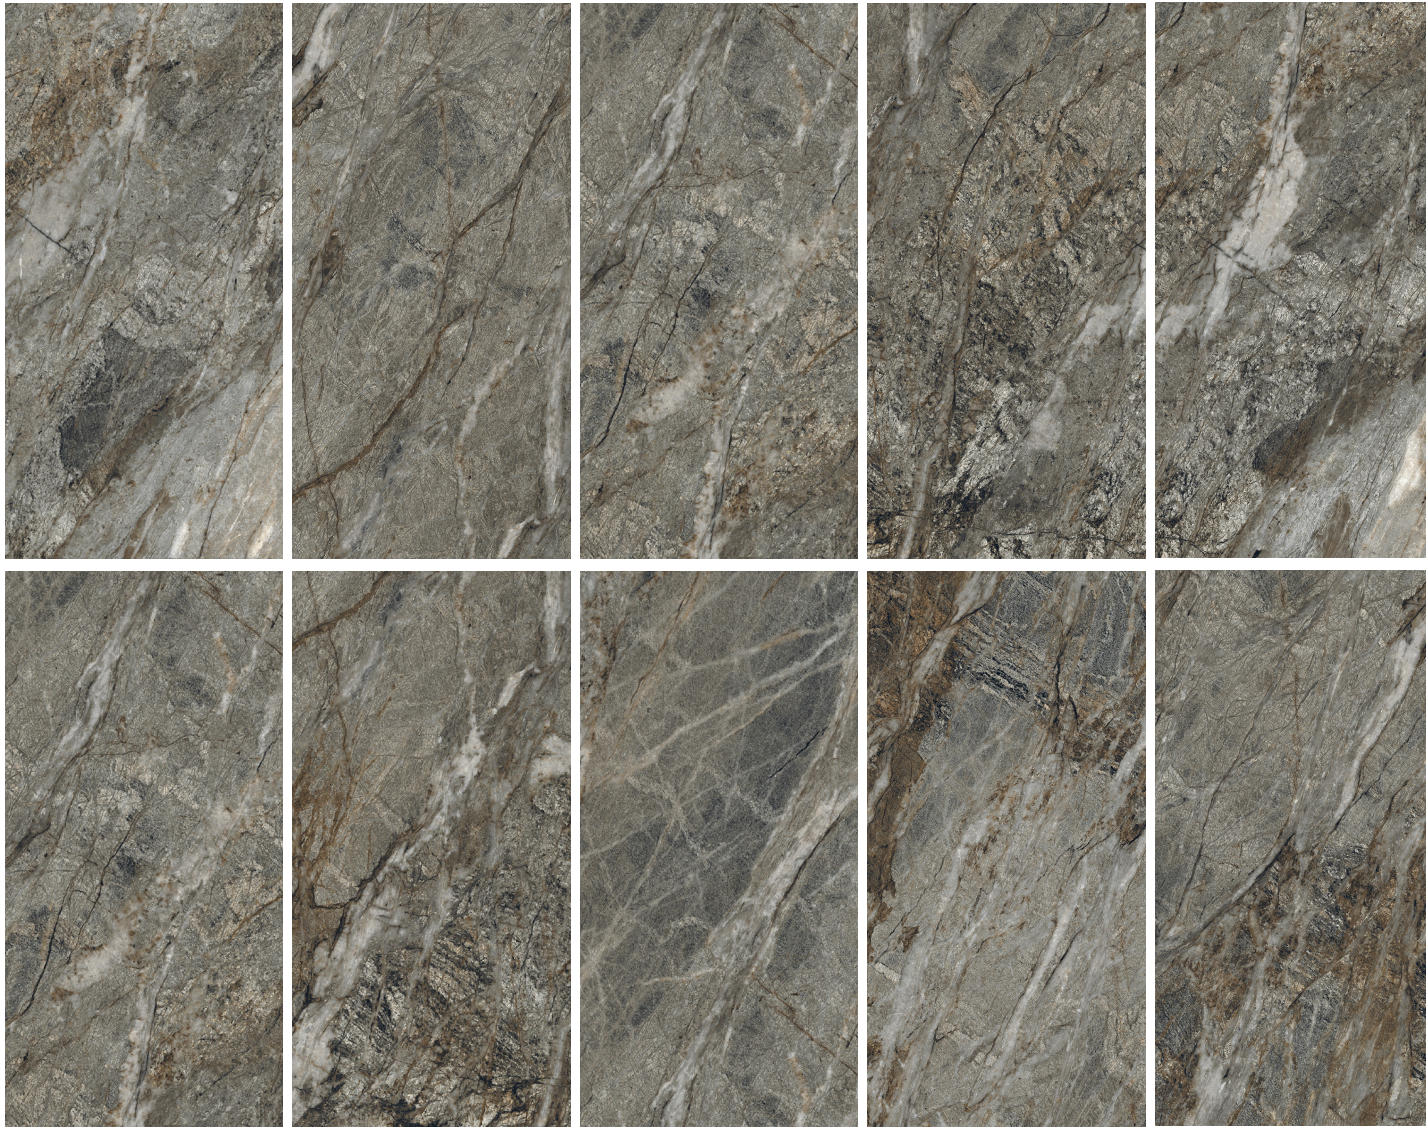


obsidian

600x1200mm | 10 faces

technical data


PROPERTIES	TEST METHOD	PRESCRIBED VALUES	VALUE
water absorption	ISO 10545-3	≤0.5%	≤0.06%
bending strength	ISO 10545-4	≥ 12 MPA	≥ 33.5MPA
breaking strength	ISO 10545-4	≥ 350 N	1780 N
abrasion resistance	ISO 10545-7	Max. 175 mm ³ PEI 1-5	class 3
resistance to chemicals	ISO 10545-13	Household chemicals & swimming pool salts	GA
		Low concentration of acids & alkalis	GLA
resistance to staining	ISO 10545-14	Minimum class 3	class 5

certificates




ISO 17889-1
Sustainability for ceramic tiles

SISTEMA DI GESTIONE AMBIENTALE CERTIFICATO



UNI EN ISO 14001:2015

ATTESTAZIONE DELLA PERCENTUALE DI RICICLATO



DT 55



Please note that all products must be fabricated using score & snap method and/or wet cutting in conjunction with AS/NZS 1716:2012, AS/NZS 1715:2009, AS/NZS 60335.2.69:2017. For more information please refer to: <https://www.safework.nsw.gov.au>