



The T2 Terrazzo look without the associated maintenance. These porcelain tiles are available with six contemporary colours. T2 is suitable for all environments through the matt and grip finishes.

PRODUCT TYPE: Glazed Porcelain

COLOURS: Shale, Steel, Flint, Shadow, Vintage and

Parchment

SIZES: 300x600mm and 600x600mm*

Rectified edges

FINISHES/USAGE: Matt and Grip / Floor and wall

AESTHETIC QUALITIES: Terrazzo look

TECHINICAL INFO: P3 Pendulum Slip Rating (Matt)

P5 Pendulum Slip Rating (Grip) P4 AWT (After 500 cycles) (Grip) More technical info on the last page

VARIATION:



^{*600}x600mm only available in Shale & Steel



PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	COLOURS AVAILABLE	TILE EDGE
300x600mm 600X600mm 300x600mm 600x600mm	MATT MATT GRIP* GRIP*	P3 PENDULUM P3 PENDULUM P5 PENDULUM P5 PENDULUM	ALL COLOURS Parchment Shale Steel Flint Shadow	RECTIFIED RECTIFIED RECTIFIED

^{*}The GRIP finish receives a Sustainable Slip Resistance value of P4 pendulum after 500 cycles

FORMATS





SHALE MATT



STEEL MATT



SHALE GRIP



STEEL GRIP



PRODUCT SPECIFICATIONS


SIZES	FINISHES	SLIP RATING	COLOURS AVAILABLE	TILE EDGE
300x600mm	MATT	P3 PENDULUM	ALL COLOURS	RECTIFIED
600X600mm	MATT	P3 PENDULUM	ALL COLOURS	RECTIFIED
300x600mm	GRIP*	P5 PENDULUM	Parchment Shale Steel Flint Shadow	RECTIFIED



FLINT MATT



SHADOW MATT



FLINT GRIP



SHADOW GRIP

600x600mm

FORMATS

300x600mm

^{*}The GRIP finish receives a Sustainable Slip Resistance value of P4 pendulum after 500 cycles.



PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	COLOURS AVAILABLE	TILE EDGE
300x600mm	MATT	P3 PENDULUM	ALL COLOURS	RECTIFIED
600X600mm	MATT	P3 PENDULUM	ALL COLOURS	RECTIFIED
300x600mm	GRIP*	P5 PENDULUM	Parchment Shale Steel Flint Shadow	RECTIFIED



PARCHEMENT MATT



VINTAGE MATT



PARCHMENT GRIP

FORMATS

300x600mm

600x600mm

^{*}The GRIP finish receives a Sustainable Slip Resistance value of P4 pendulum after 500 cycles.






Τ2




Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

Τ2

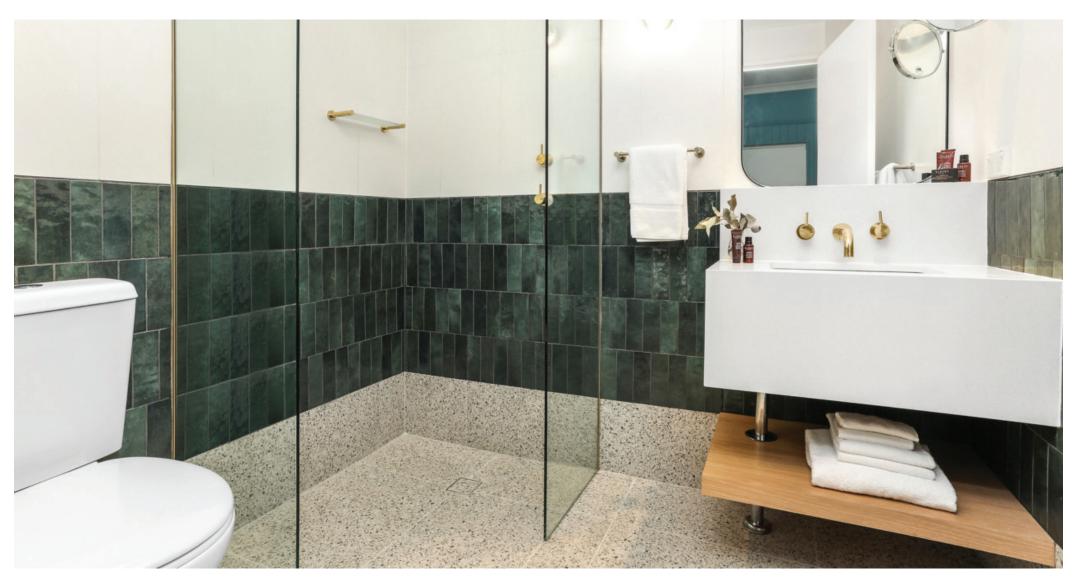



Τ2

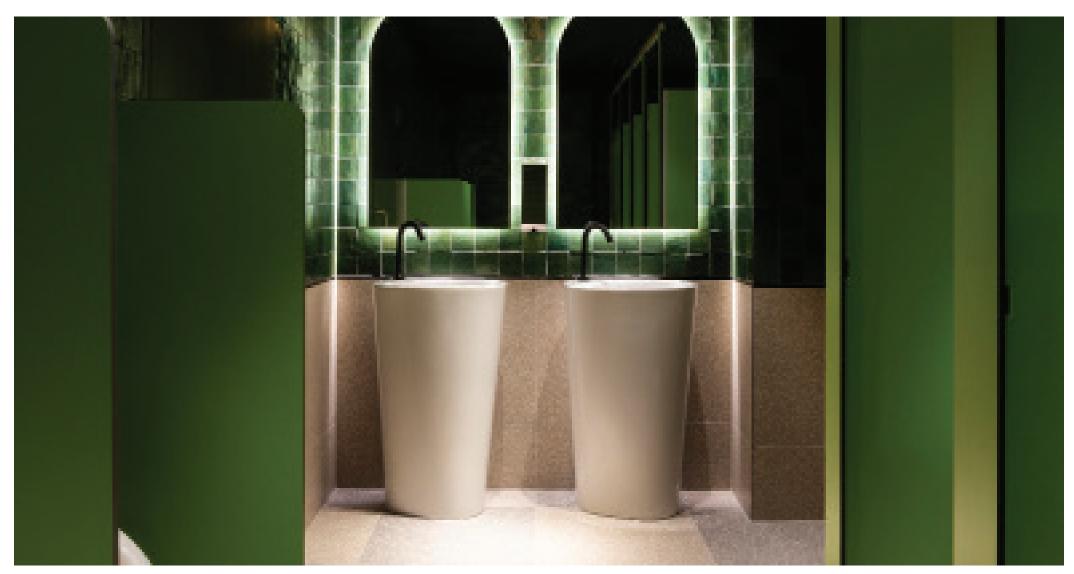

TECHNICAL DATA

	technical characteristics Group B I a	test method	required values	value
888	water absorption	iso 10545-3	≤ 0.5%	0.21%
<u>6</u>	bending strengh	iso 10545-4	≥12MPA	≥33.5MPA
<u>6</u>	breaking strength (S)	iso 10545-4	≥ 350 N	≥ 1785N
Ö	abrasion resistace	iso 10545-7	Max. 175 mm³ PEI 1-5	Class 3
	chemical resistance	iso 10545-13	Household chemicals and swimming pool salts	GA
•			Low concentration of acids and alkalis	GLA
Z	stain resistance	iso 10545-14	Minimum Class 3	Class 5