

Aeris



PRODUCT TYPE: Glazed porcelain

COLOURS: Pearl, Tawn and Argent


SIZES: 300x300mm, 300x600mm, 600x600mm,
600x600x20mm, 400x600x20mm,
1100x1290x9mm and 600x1200mm
Rectified edges

FINISHES/USAGE: Matt and Grip/Wall and Floor

AESTHETIC QUALITIES: Refined & contemporary

TECHNICAL INFO P3 Pendulum Slip Rating (Matt)
P5 Pendulum Slip Rating (Grip)
More information on last page

VARIATION:





V2

AERIS is ideal for elevating a seamless lifestyle of contemporary living. From sophisticated interior walls and floors to spacious alfresco entertaining and poolside settings, AERIS offers sleek neutral textures in a curated colour palette of white, cream and grey. Available in crazy pave, tiles, and pavers.


PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
300x300mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	MATT	P3 Pendulum	RECTIFIED
600x600mm	MATT	P3 Pendulum	RECTIFIED
600x1200mm	MATT	P3 Pendulum	RECTIFIED
600x600mm	GRIP	P5 Pendulum	RECTIFIED
600x600x20mm	GRIP	P5 Pendulum	RECTIFIED
400x600x20mm	COPING	P5 Pendulum	RECTIFIED
1100x1290x9mm	MATT	P3 Pendulum	RECTIFIED

FORMATS

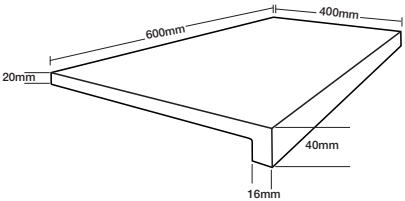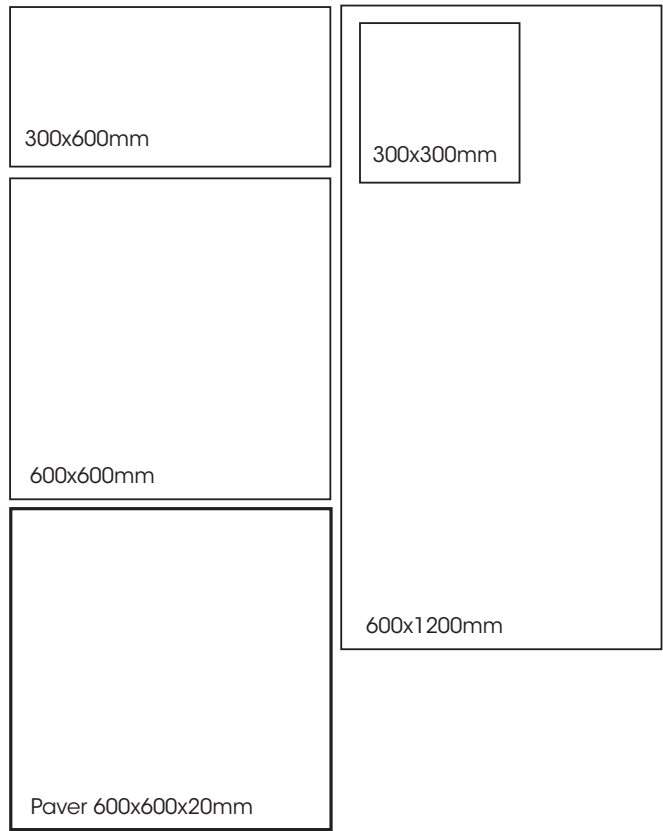

Paver Coping 400x600x20mm

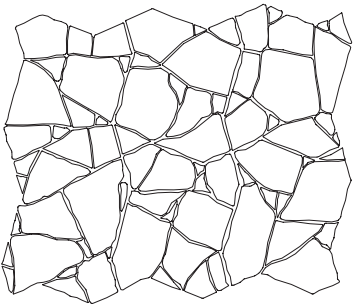

Crazy Pave 1100x1290x9mm

* Crazy Paves are available as a set of 6 sheets. Each sheet size is approximately 479x594mm and covers 1.42 square meters.



PEARL



TAWN



ARGENT

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

Aeris



AERIS ARGENT 600x1200mm



AERIS PEARL 600x600mm

Aeris



AERIS ARGENT 600x1200mm



AERIS ARGENT 600x600mm

Aeris



AERIS CRAZY PAVE TAWN



AERIS PEARL 300x300mm

Aeris

Paver Coping 400x600x20mm



pearl coping



tawn coping




argent coping

pictured: pearl paver coping

For detailed measurements of
our paver coping, please refer
to the next page of this PDF.

Paver Coping Measurements

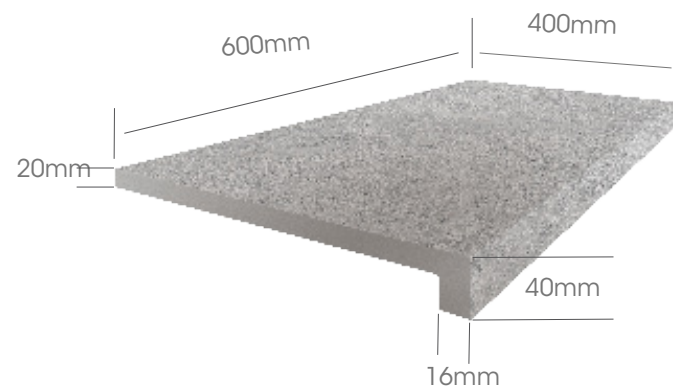

right pictured: argent



Aeris

PEARL VARIATION



Aeris

TAWN VARIATION



Aeris

ARGENT VARIATION



TECHNICAL DATA- TILE

	technical characteristics	test method	required values	result
	water absorption	ISO 10545-3	≤0.5%	≤0.08%
	breaking strength	ISO 10545-4	≥1300N	2573
	bending strength	ISO 10545-4	≥35N/mm2	52.8
	chemical resistance	ISO 10545-13	Minimum GB	GA
	staining resistance	ISO 10545-14	Minimum Class 3	class 5

Please note that all products must be fabricated using score & snap method and/or wet cutting in conjunction with AS/NZS 1716:2012, AS/NZS 1715:2009, AS/NZS 60335.2.69:2017* For more information please refer to: <https://www.safework.nsw.gov.au>



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

TECHNICAL DATA- PAVER

	technical characteristics	test method	required values	result
	water absorption	ISO 10545-3	≤0.5%	≤0.04%
	breaking strength	ISO 10545-4	-	11427
	bending strength	ISO 10545-4	-	45.60
	chemical resistance	ISO 10545-13	Minimum GB	GA
	staining resistance	ISO 10545-14	Minimum Class 3	class 5



Please note that all products must be fabricated using score & snap method and/or wet cutting in conjunction with AS/NZS 1716:2012, AS/NZS 1715:2009, AS/NZS 60335.2.69:2017* For more information please refer to: <https://www.safework.nsw.gov.au>

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.