


# Terra

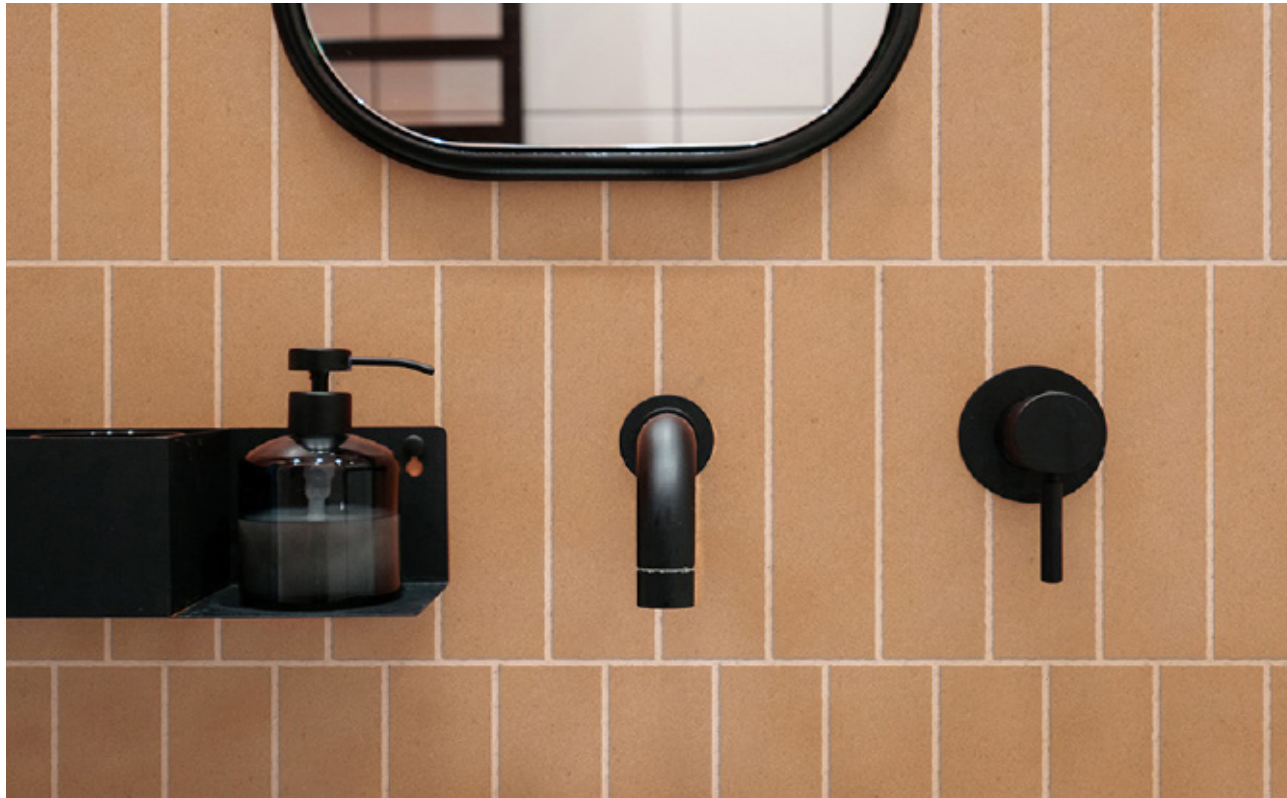

**PRODUCT TYPE:** Terracotta

**COLOURS:** Light, Dark, Maroon and Iridium

**SIZES:** 60x240mm, 150x150mm and 300x300mm  
Non-Rectified edges


**FINISHES/USAGE:** Matt/Wall and floor

**AESTHETIC QUALITIES:** Natural Terracotta colours

**TECHINICAL INFO:** P4 Pendulum Slip Rating

- Sealing is required prior and post grouting for all sizes.
- Dark grout colours are not recommended.
- Minimum 10mm grout joints are recommended

**VARIATION:**



V1

Our natural terracotta collection, TERRA has arrived. Available in four beautiful colours and both square and brick format... a modern twist on a traditional look.



# Terra

## PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATINGS	TILE EDGE
60x240mm	MATT	P4 Pendulum	NON-RECTIFIED
150x150mm	MATT	P4 Pendulum	NON-RECTIFIED
300x300mm	MATT	P4 Pendulum	NON-RECTIFIED

\*Please note Terra Light is only available in 60x240mm & 300x300mm


## FORMATS

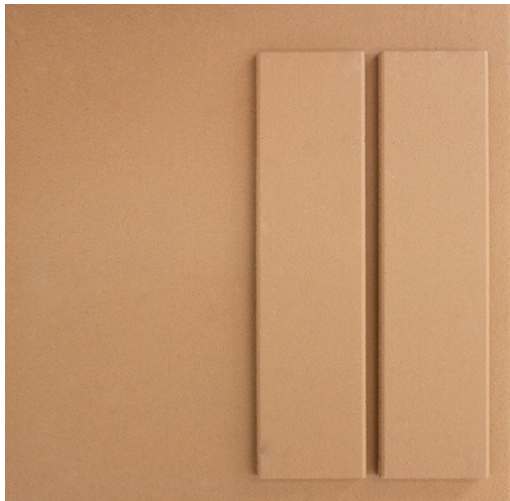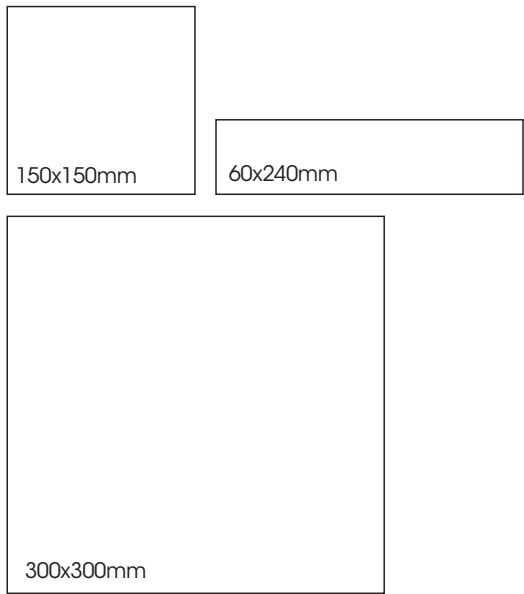

LIGHT MATT



DARK MATT\*

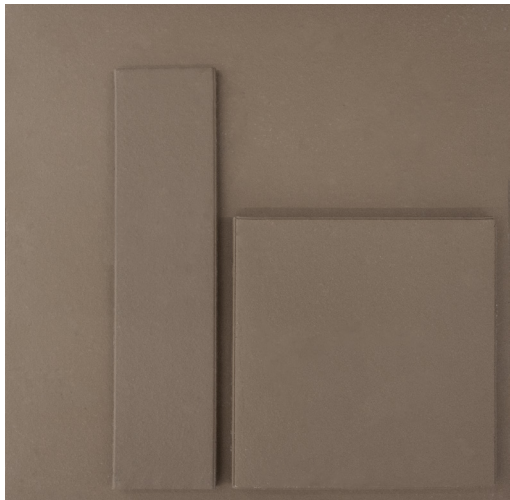

MAROON MATT



IRIDIUM MATT

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

# Terra

## LIFESTYLES











# Terra

## LIFESTYLES











Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

## TECHNICAL DATA - BRICKS

	technical characteristics	test method	result
	water absorption	ISO 10545-3	5,75%
	modulus of rupture	ISO 10545-4	27,78 MPa
	impact resistance	ISO 10545-5	0,80
	coefficient of thermal expansion	ISO 10545-8	6,4
	deep abrasion resistance	ISO 10545-6	275 mm <sup>3</sup>
	moisture expansion	ISO 10545-10	0,22 mm/m
	resistance to frost	ISO 10545-12	> 100
	surface scratch hardness	-	6 Mohs

## TECHNICAL DATA - TILES

	technical characteristics	test method	result
	water absorption	ISO 10545-3	7,09%
	modulus of rupture	ISO 10545-4	20,7 MPa
	impact resistance	ISO 10545-5	0,80
	coefficient of thermal expansion	ISO 10545-8	7,4
	deep abrasion resistance	ISO 10545-6	215 mm <sup>3</sup>
	moisture expansion	ISO 10545-10	0,228 mm/m
	resistance to frost	ISO 10545-12	> 100
	coefficient of friction	-	0,67 dry   0,58 wet