

# Travstone Cross



**PRODUCT TYPE:** Glazed Porcelain

**COLOURS:** Pearl, Cream and Argent


**SIZES:** 150x150mm, 300x600mm,  
400x600x20mm coping, 600x600mm,  
600x600x20mm, 600x1200mm  
and 1200x2700x6mm

**FINISHES/USAGE:** Matt, Combed, Honed and Grip/Wall  
and Floor

**AESTHETIC QUALITIES:** Crosscut look

**TECHNICAL INFO:** P3 Pendulum slip rating (Matt)  
P5 Pendulum slip rating (Grip)  
P5 Pendulum slip rating (Grip Paver)

**VARIATION:**



V2


Inspired by the natural crosscut stone, TRAVSTONE CROSS features three beautiful colours with gentle organic veining. It is available in versatile sizes and is suitable for both commercial and residential use.

## PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
150x150mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	MATT	P3 Pendulum	RECTIFIED
600x600mm	MATT	P3 Pendulum	RECTIFIED
600x1200mm	MATT	P3 Pendulum	RECTIFIED
1200x2700x6mm*	MATT	-	RECTIFIED
600x600mm	GRIP	P5 Pendulum	RECTIFIED
400x600x20mm coping	GRIP	P5 Pendulum	RECTIFIED
600x600x20mm	GRIP	P5 Pendulum	RECTIFIED
300x600mm	HONED	-	RECTIFIED
600x600mm	HONED	-	RECTIFIED
600x1200mm	HONED	-	RECTIFIED
600x1200mm	COMBED	-	RECTIFIED

\*1200x2700x6mm is only available in Pearl

## FORMATS

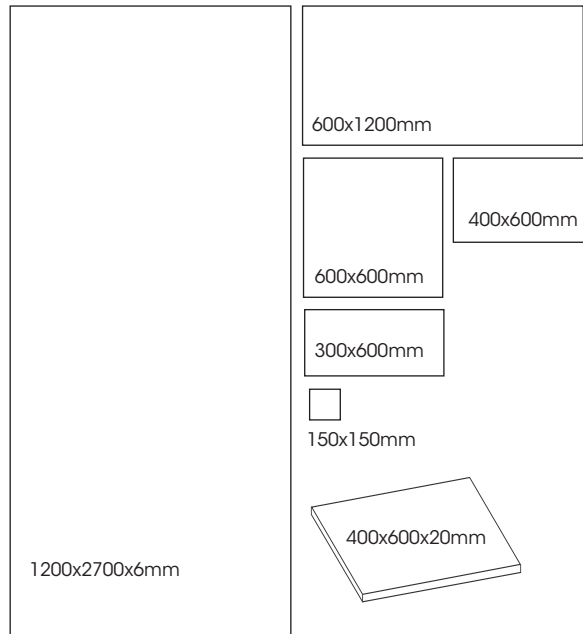


# Travestone Cross



PEARL 3D COMBED



CREAM 3D COMBED

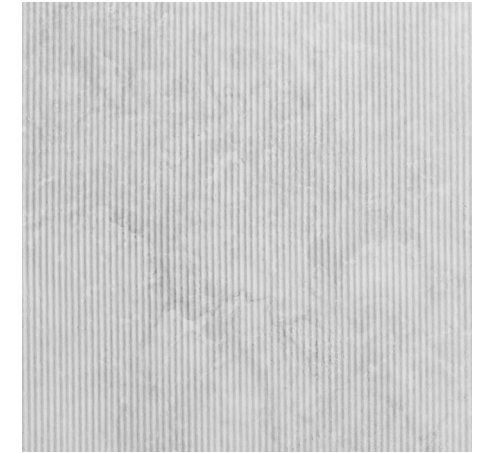

ARGENT 3D COMBED



PEARL



CREAM



ARGENT

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

# Travestone Cross



3D COMBED PEARL



3D COMBED ARGENT

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

# Travestone Cross

Coping 400x600x20mm



# Travestone Cross



# Travestone Cross

## PEARL VARIATION



# Travestone Cross

## CREAM VARIATION











# Travestone Cross

## ARGENT VARIATION



# Travestone Cross

## TECHNICAL DATA

	technical characteristics	test method	required values	result
	water absorption	ISO 10545-3	≤0.5%	≤0.4%
	modulus of rupture	ISO 10545-4	≥ 35 N/mm <sup>2</sup>	compliant
	surface quality	ISO 10545-2	Complies with the standards	≥95%
	thermal shock resistance	ISO 10545-9	No sample must show visible defects	compliant
	deep abrasion resistance	ISO 10545-6	≤ 175 mm <sup>3</sup>	compliant
	chemical resistance	ISO 10545-13	Declared value	compliant
	resistance to frost	ISO 10545-12	Resistant	compliant
	staining resistance	ISO 10545-14	Minimum Class 3	compliant