

Classic



PRODUCT TYPE: Full bodied porcelain


COLOURS: Crisp White, White and Black

SIZES: 75x600mm, 300x300mm, 300x600mm
and 600x600mm
Rectified edges

FINISHES/USAGE: Matt and Polished/Floor and Wall

AESTHETIC QUALITIES: Clean and simple

VARIATION:



V1

CLASSIC will freshen up any project with their classic look and feel. Available in black and white and in matt and polished finishes, CLASSIC is perfect for creating a crisp, clean finish or to complement more decorative tiles.

Classic

PRODUCT SPECIFICATIONS

SIZES	FINISHES	TILE EDGE
75x600mm	BLACK MATT ONLY	RECTIFIED
300x300mm	MATT	RECTIFIED
300x600mm	MATT	RECTIFIED
600x600mm	MATT	RECTIFIED
300x300mm	POLISHED (BLACK ONLY)	RECTIFIED
300x600mm	POLISHED	RECTIFIED
600x600mm	POLISHED	RECTIFIED

FORMATS

750x600mm


300x600mm

300x300mm

600x600mm




CRISP WHITE POLISHED

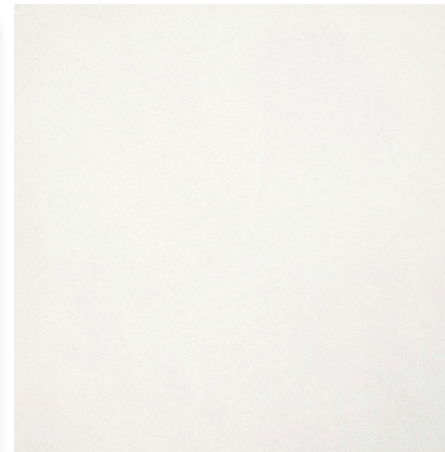

WHITE MATT



WHITE POLISHED

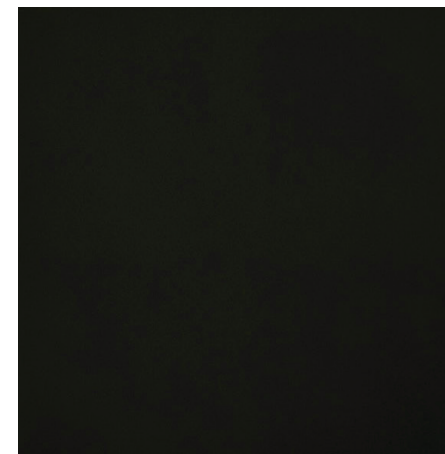






BLACK MATT







BLACK POLISHED

Classic Polished Technical Data

Classic

	technical characteristics	technical requirements	test results	verdict
	water absorption	Average maximum 0.5 Individual maximum 0.6	0.06 0.05~0.08	pass
	frost resistance	no crack or peeling after first frost test	conformed	pass
	breaking strength	When the thickness $\geq 7.5\text{mm}$, the mean value shall not be less than 1300	1427	pass
	resistance to deep abrasion	Maximum 175	113	pass
	chemical resistance	Minimum UB	Clas UA	pass

Classic Matt Technical Data

	technical characteristics	test method	value
	water absorption	ASTM TESTC373	0.30%
	bending strength		38 N/mm ²
	thermal shock resistance	ASTMC484	resistant
	chemical resistance	ASTMC650	resistant