

# Pick n Brick



PICK N BRICK is hand made with only the machinery used for the extrusion. The mixture of clay and porcelain gres is created and cut by hand.

**PRODUCT TYPE:** Hand made extruded gres porcelain

**COLOURS:** Bianco, Grigio, Basalto, Verde Chiaro, Giallo

**SIZES:** 50x150mm  
Non-rectified edges

**FINISHES/USAGE:** Matt/Wall and floor.


**AESTHETIC QUALITIES:** Waxy concrete effect. Soft to touch surface.

**TECHINICAL INFO:** P3 'X' Pendulum Slip rating (Matt)

Handcrafted material, therefore variations in colours, tone and size are to be considered intrinsic qualities instead of defects.

**ORIGIN** Italy

**VARIATION**



V1


# Pick n Brick

## PRODUCT SPECIFICATIONS

SIZES	FINISHES	TILE EDGE	SLIP RATING
50x150MM	MATT	NON-RECTIFIED	P3 X Pendulum

**\* Indent item - Subject to stock availability overseas, please allow 6-10 weeks lead time from date of order confirmation. Minimum quantity may apply.**


## FORMATS



Due to the size variation we suggest laying pieces by eye/feel without the use of spacers. Adhesive should be applied to substrate as well as the back of the tile to compensate for the differing thicknesses of the product.



PICK N BRICK BIANCO MATT

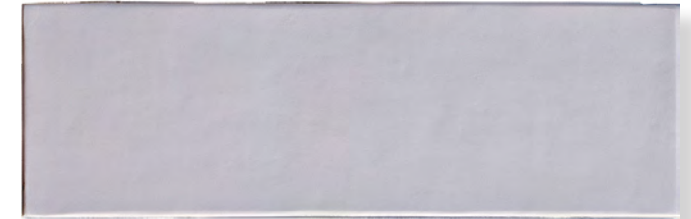


PICK N BRICK GRIGIO MATT



PICK N BRICK BASALTO MATT





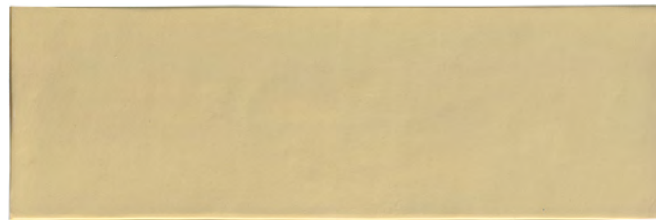




PICK N BRICK VERDE CHIARO MATT



PICK N BRICK GIALLO MATT

# Pick n Brick

	technical characteristics	test method	value
	water absorption	iso 10545-3	0,5%
	frost resistance	iso 10545-12	resistant
	bending strength	iso 10545-4	35 N/mm
	resistance to deep abrasion	iso 10545-7	PEI IV
	thermal shock resistance	iso 10545-9	resistant
	chemical resistance	iso 10545-13	comforable
	stain resistance	iso 10545-14	class V

# Pick n Brick



# Pick n Brick

