



PRODUCT TYPE: Glazed Porcelain Floor Tile

COLOURS: White, Soft Grey, Grey and Basalt

SIZES: 300x300mm, 300x600mm and

600x600mm Rectified edges

FINISHES/USAGE: Matt and Grip

Floor and wall

AESTHETIC QUALITIES: Terrazzo look

TECHINICAL INFO: P3 Pendulum Slip Rating (Matt)

P5 Pendulum Slip Rating (Grip)
P4 AWT (After 500 cycles) (Grip)
More technical info on the last page

VARIATION:



The terrazzo look without the associated maintenance. These porcelain tiles are available in the modular sizing with four contemporary colourways suitable for all environments through the matt, grip and semi-polished finishes.



PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
300x300mm	MATT	P3 PENDULUM	RECTIFIED
300x600mm	MATT	P3 PENDULUM	RECTIFIED
600X600mm	MATT	P3 PENDULUM	RECTIFIED
300x600mm	GRIP	P5 PENDULUM	RECTIFIED

WHITE



MATT

FORMATS

600x600MM



SOFT GREY





GRIP

MATT

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



PRODUCT SPECIFICATIONS


SIZES	FINISHES	SLIP RATING	TILE EDGE
300x300mm	MATT	P3 PENDULUM	RECTIFIED
300x600mm	MATT	P3 PENDULUM	RECTIFIED
600X600mm	MATT	P3 PENDULUM	RECTIFIED
300x600mm	GRIP	P5 PENDULUM	RECTIFIED

300x300MM

GREY



FORMATS




BASALT





DAVID JONES CAFE BARANGAROO - VENATO WHITE + SOFT GREY



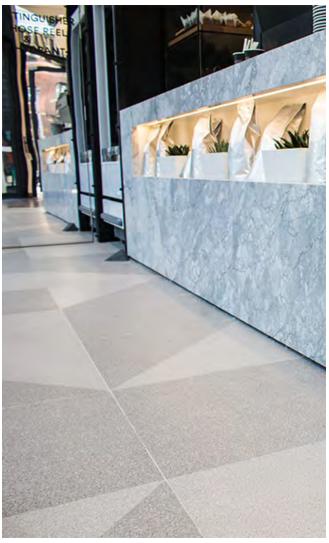



ASTRA ZENECA MAQUARIE PARK - VENATO WHITE





MARRICK AND CO DISPLAY SUITE - VENATO CHARCOAL





MARRICK AND CO DISPLAY SUITE - VENATO CHARCOAL





SKHEME BATHROOM - SOFT GREY





	technical characteristics Group B I a	test method	required values	value
888	water absorption	iso 10545-3	≤ 0.5%	0.21%
<u>B</u>	bending strength	iso 10545-4	≥12MPA	≥33.5MPA
<u>B</u> C	breaking strength (S)	iso 10545-4	≥ 350 N	≥ 1785N
	abrasion resistace	iso 10545-7	Max. 175 mm³ PEI 1-5	Class3
	chemical resistance	iso 10545-13	Household chemicals and swimming pool salts	GA
•			Low concentration of acids and alkalis	GLA
2	stain resistance	iso 10545-14	Minimum Class 3	Class 5