skheme®

Do Up Street



DO UP STREET is a fantastic solution for retailers who can't brick their walls but want a painted brick wall feel.

| PRODUCT TYPE: | Glazed Porcelain | |
|----------------------|---------------------------------------|--|
| COLOURS: | Street White and Street Black | |
| SIZES: | 600x1200mm Rectified Edges | |
| FINISHES/USAGE: | Gloss and Matt/Wall | |
| AESTHETIC QUALITIES: | Painted brick look | |
| Country of Origin: | ITALY | |
| TECHNICAL DATA: | More technical data on the last page. | |
| VARIATION: | V1 | |

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint. Visit <u>http://www.skheme.com/Conditions.aspx</u> for all disclaimer, copyright and terms and conditions.

skheme®

Do Up Street

PRODUCT SPECIFICATIONS

| SIZES | FINISHES | TILE EDGE |
|------------|----------|-----------|
| 600x1200mm | MATT | RECTIFIED |
| 600x1200mm | GLOSS | RECTIFIED |





WHITE GLOSS

WHITE MATT



BLACK MATT


Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint. Visit <u>http://www.skheme.com/Conditions.aspx</u> for all disclaimer, copyright and terms and conditions.

FORMATS



skheme®

Do Up Street

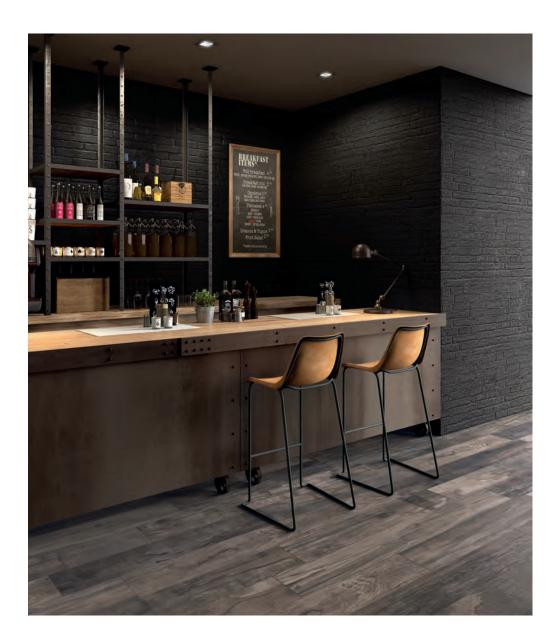





Do Up Street

| | technical characteristics | test method | value |
|--------------|---------------------------|--------------|-----------------------|
| | | | |
| ۵ ۵ ۵ ۵ ۵ | water absorption | iso 10545-3 | E = 5% |
| Ĝĉ | bending strength | iso 10545-4 | >35 N/mm ² |
| Ĝĉ | breaking strength (S) | iso 10545-4 | >700 |
| ±∎ | thermal shock resistance | iso 10545-9r | equired |
| 2 | stain resistance | iso 10545-14 | GL ≥ MINIMO CLASS 3 |