

Timeless



PRODUCT TYPE: 5.5mm Fibreglass reinforced lightweight porcelain slabs

COLOURS: Calacatta, Pietra Gray, Statuario White and Calacatta Bookmatch

SIZES: 1000x1000mm and 1000x3000mm
Rectified Edges


FINISHES/USAGE: Satin (Wall and floor) and Polished (Polished wall only)

AESTHETIC QUALITIES: Marble look

COUNTRY OF ORIGIN: ITALY

TECHNICAL DATA: More technical data on the last page.

VARIATION:



V3



With the timeless quality of marble and the strength of ceramic, this revolutionary design offers large format tiles with the precious look of real marble.

Timeless

PRODUCT SPECIFICATIONS

SIZES	FINISHES	TILE EDGE
1000x1000mm	SATIN	RECTIFIED
1000x3000mm	SATIN	RECTIFIED
1000x1000mm	POLISHED	RECTIFIED
1000x3000mm	POLISHED	RECTIFIED

FORMATS

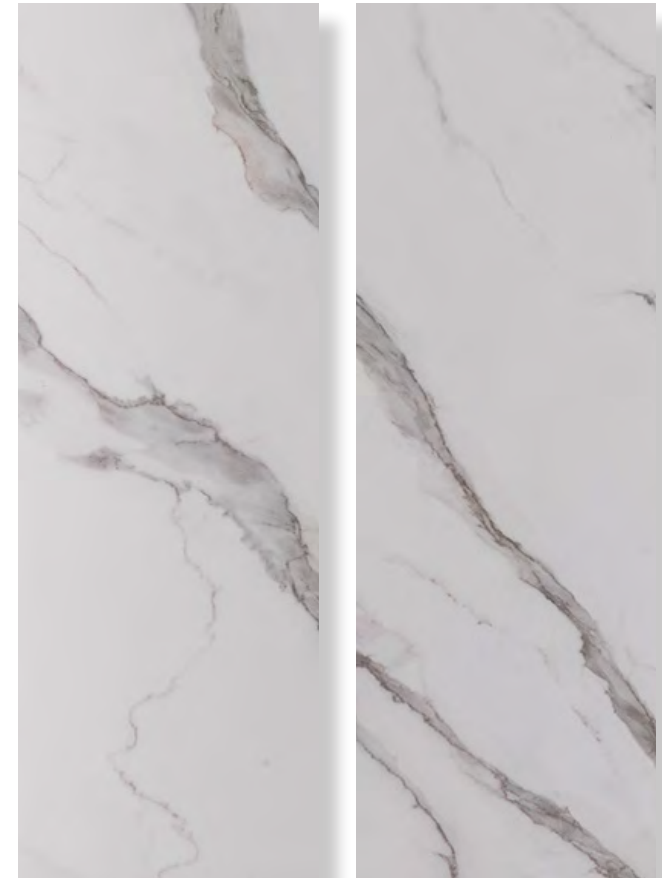

CALACATTA SATIN


CALACATTA POLISH

Timeless

Timeless Calacatta Variation



Timeless

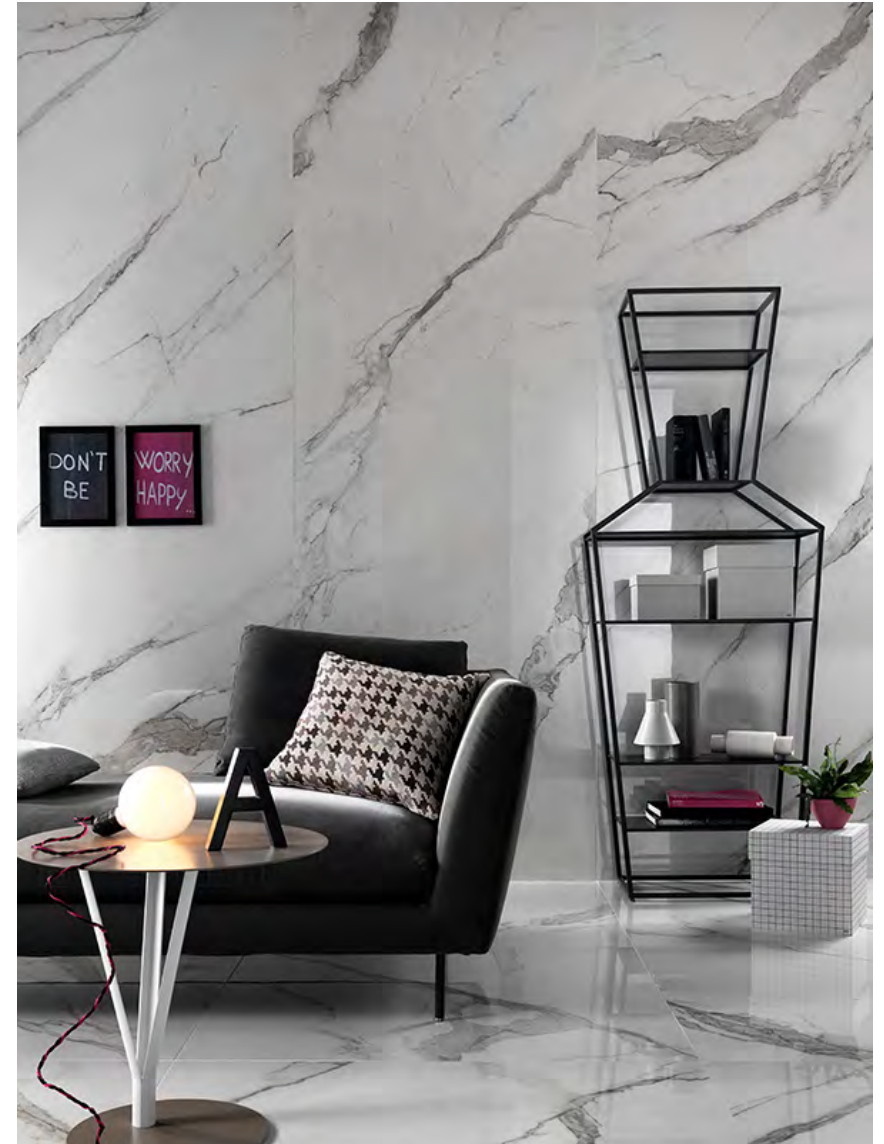



Timeless

PRODUCT SPECIFICATIONS


SIZES	FINISHES	TILE EDGE
1000x1000mm	SATIN	RECTIFIED
1000x3000mm	SATIN	RECTIFIED
1000x1000mm	POLISHED	RECTIFIED
1000x3000mm	POLISHED	RECTIFIED

NB This product requires approximately 8-12 weeks lead-time from date of order and a minimum quantity may apply.

FORMATS

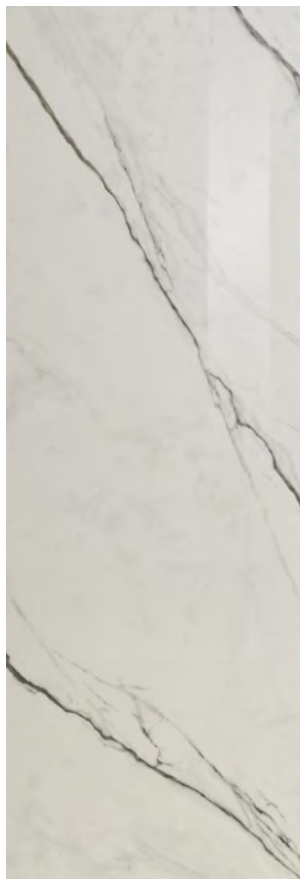

STATUARIO WHITE POLISHED

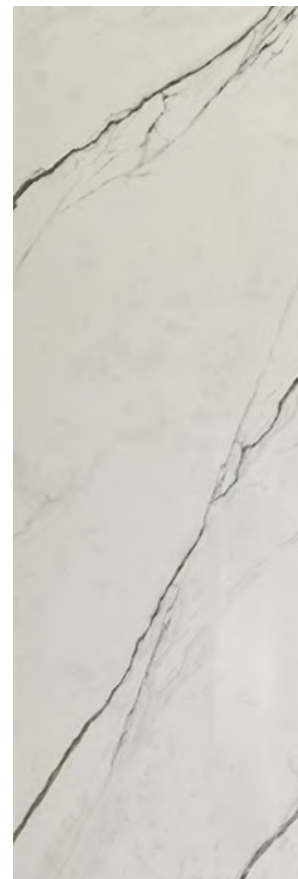

STATUARIO WHITE SATIN



PIETRA GRAY POLISHED



PIETRA GRAY SATIN

Timeless Calacatta Bookmatch

Timeless

PRODUCT SPECIFICATIONS

SIZES	FINISHES	TILE EDGE
1000x3000mm	SATIN	RECTIFIED
1000x3000mm	POLISHED	RECTIFIED

NB This product requires approximately 8-12 weeks lead-time from date of order and a minimum quantity may apply.

FORMATS



CALACATTA BOOKMATCH SIDE A

CALACATTA BOOKMATCH SIDE B

Timeless

Timeless Statuario Variation



Timeless Pietra Gray Variation




Timeless



Timeless





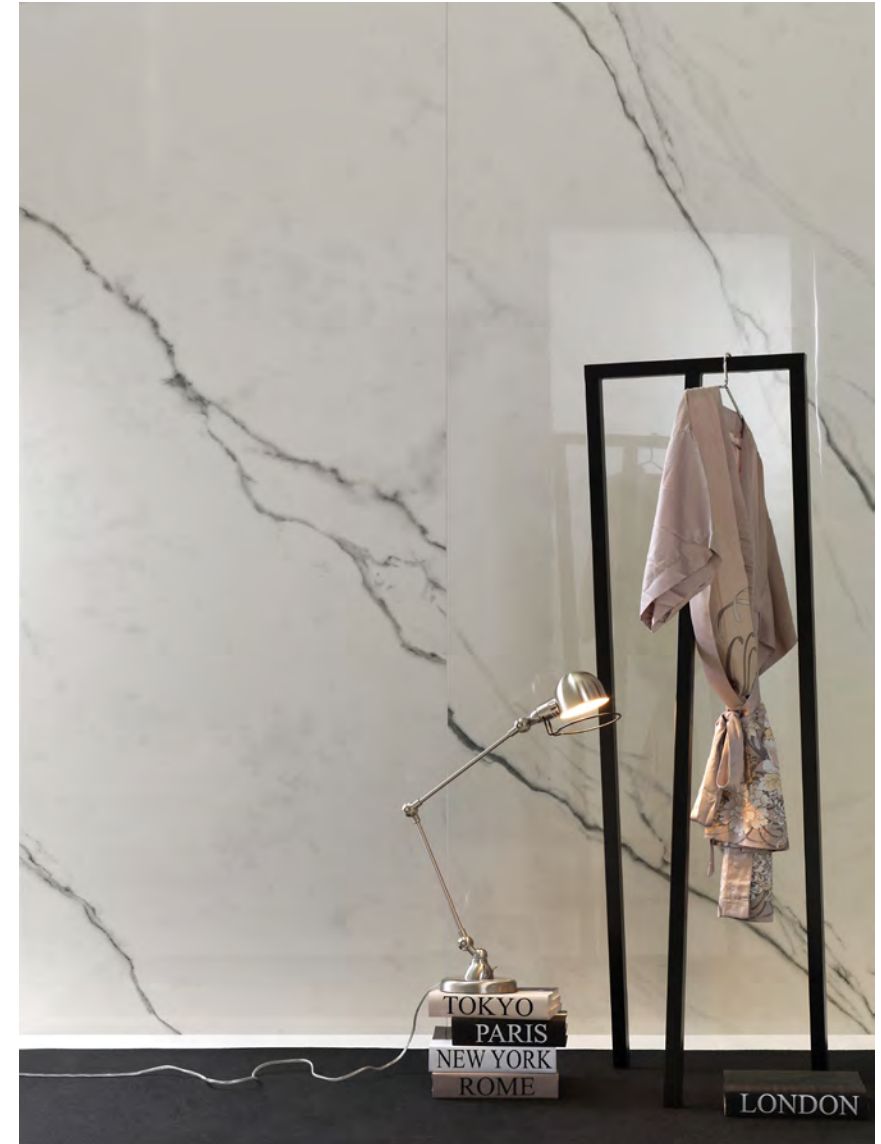






Timeless



Timeless



laminated porcelain UGL

	technical characteristics	test method	required values iso 13006 - G / en 14411 - G B1a ugl	value
	water absorption	iso 10545-3	≤ 0,5%	≤ 0,01%*
	frost resistance	iso 10545-12	no alterations	resistant
	bending strength	iso 10545-4	≥ 35 N/mm ²	≥ 120 N/mm ^{2**}
	breaking strength (S)	iso 10545-4	≥ 700 N	≥ 1000 N**
	resistance to deep abrasion	iso 10545-6	≤ 175 mm ³	compliant
	resistance to compression	-	-	≥ 400 N/mm ²
	thermal shock resistance	iso 10545-9	resistant	resistant
	chemical resistance	iso 10545-13	as indicated by manufacturer	resistant
	stain resistance	iso 10545-14	≥ class 3	resistant