



TORONTO is produced using hi-definition inkjet technology to recreate a crosscut stone look.

**PRODUCT TYPE**: Glazed Porcelain

**COLOURS:** Pearl, Ash and Slate

**SIZES:** 300x300mm, 300x600mm, 600x600mm

FINISHES/USAGE: Rectified edges

AESTHETIC QUALITIES: Matt, Semi-Polished, Satin & Grip/Wall &

floor

The digital system gurantees realistic, authentic colouring, with variations in

texture and patterning.

**TECHNICAL DATA:** P3 Pendulum slip rating (Matt)

P2 Pendulum slip rating (Satin) P5 Pendulum slip rating (Grip)

More technical data on the last page

**VARIATION:** 



٧3



#### PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
300x300mm	MATT	P3 PENDULUM	RECTIFIED
300x600mm	MATT	P3 PENDULUM	RECTIFIED
600x600mm	MATT	P3 PENDULUM	RECTIFIED
300x600mm	SEMI POLISHED	_	RECTIFIED
300x600mm	SEMI POLISHED	_	RECTIFIED





PEARL MATT

PEARL SEMI-POLISHED

### **FORMATS**

300x600mm 300x300mm

600x600mm



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



#### PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
300x300mm	MATT	P3 PENDULUM	RECTIFIED
300X30011111	IVIALI	P3 PENDULUIVI	KECTIFIED
300x600mm	MATT	P3 PENDULUM	RECTIFIED
600x600mm	MATT	P3 PENDULUM	RECTIFIED
300x600mm	SEMI POLISHED	-	RECTIFIED
300x600mm	SEMI POLISHED	-	RECTIFIED
300x600mm	GRIP	P5 PENDULUM	RECTIFIED
600x600mm	GRIP	P5 PENDULUM	RECTIFIED







ASH MATT


ASH SEMI-POLISHED

ASH GRIP

### **FORMATS**

300x600mm 300x300mm



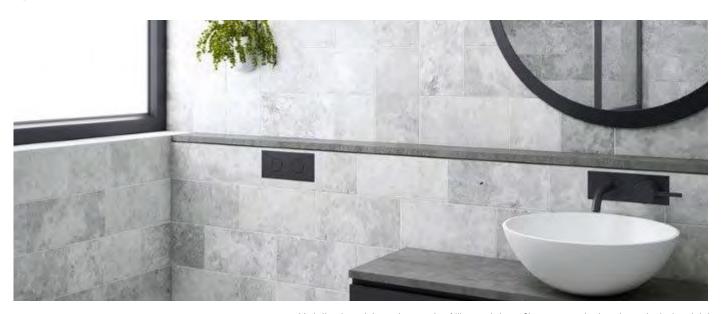

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



#### PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
200, 200, 20	CATINI	DO DENIDUIUM	DECTIFIED
300x300mm	SATIN	P2 PENDULUM	RECTIFIED
300x600mm	SATIN	P2 PENDULUM	RECTIFIED
600x600mm	SATIN	P2 PENDULUM	RECTIFIED
300x600mm	GRIP	P5 PENDULUM	RECTIFIED
600x600mm	GRIP	P5 PENDULUM	RECTIFIED





SLATE SATIN

SLATE GRIP

### **FORMATS**

300x600mm 300x300mm













DESIGNER: INK INTERIOR ARCHITECTS
PHOTOGRAPHER: MICHAEL WEE



	technical characteristics Group B I a	test method	required values	value
888	water absorption	iso 10545-30	≤ 0.5%	.21%
<b>B</b> C	bending strength	iso 10545-4	≥12MPA	≥ 33.5MPA
ßô	breaking strength (S)	iso 10545-4	≥ 350 N	≥ 1785N
<b>©</b>	abrasion resistace	iso 10545-7	Max. 175 mm³ PEI 1-5	Class 3
	chemical resistance	iso 10545-13	Household chemicals and swimming pool salts	GA
•			Low concentration of acids and alkalis	GLA
7.	stain resistance	iso 10545-14	Minimum Class 3	Class 5