

**COLOURS:** Off White, Grey, Greige, Buff and Charcoal

SIZES: Varies per colour Rectified Edges

FINISHES/USAGE: Matt, Semi-Polished, Grip/Wall and Floor

AESTHETIC QUALITIES: Concrete look with 30-40% exposed

aggregate.

**TECHINICAL INFO:** P3 Pendulum Slip rating (Matt)

P5 Pendulum Slip rating (Grip)

AWT P3 Pendulum Slip rating after 500

cycles (Grip)

More technical data on the last page.

ORIGIN: Italy

**VARIATION:** 



٧3



With the impact of concrete and all the benefits of porcelain, our AGGREGATE series is the best looking exposed aggregate tile on the market. The series contains an adaptable neutral colour palette with easy maintenance finishes and large formats suitable for new or existing projects.




#### PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATINGS	TILE EDGE
300x300mm	MATT	`X' Pendulum	RECTIFIED
400x800mm	MATT	`X' Pendulum	RECTIFIED
600x600mm	MATT	`X' Pendulum	RECTIFIED
800x800mm	MATT	`X' Pendulum	RECTIFIED
400x800mm	MATT	`X' Pendulum	RECTIFIED
800x800mm	SEMI-POLISH	-	RECTIFIED
600x600mm	GRIP	P5 'V' Pendulum**	RECTIFIED
300X600mm*	MATT	'X' Pendulum	RECTIFIED
300x600mm*	SEMI-POLISH	-	RECTIFIED

<sup>\*</sup> Indent item - Subject to stock availability overseas, please allow 6-10 weeks lead time from date of order confirmation. Minimum quantity may apply.

#### **FORMATS**



#### **GREY**







MATT

SEMI-POLISHED

**GRIP** 



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

<sup>\*\*</sup> AWT P3 'X' Pendulum slip rating (500 cycles)



#### PRODUCT SPECIFICATIONS

SIZES	FINISHES SLIP RATINGS		TILE EDGE
300x300mm	MATT	`X' Pendulum	RECTIFIED
300x30011111	IVIATI	A Feriadiani	KLCIIIILD
600x600mm	MATT	'X' Pendulum	RECTIFIED
600x600mm	SEMI-POLISH	-	RECTIFIED
300X600mm*	MATT	'X' Pendulum	RECTIFIED
400x800mm*	MATT	'X' Pendulum	RECTIFIED
800x800mm*	MATT	'X' Pendulum	RECTIFIED
300x600mm*	SEMI-POLISH	-	RECTIFIED
400x800mm*	SEMI-POLISH	-	RECTIFIED
800x800mm*	SEMI-POLISH	-	RECTIFIED
600x600mm*	DECOR MATT	-	RECTIFIED

<sup>\*</sup> Indent item - Subject to stock availability overseas, please allow 6-10 weeks lead time from date of order confirmation. Minimum quantity may apply.

#### **FORMATS**

300x 300mm 300x600mm 400x800mm 600x600mm

800x800mm

#### **OFF-WHITE**







SEMI-POLISHED

**DECORI** 




Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



#### PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATINGS	TILE EDGE
300x300mm 600x600mm 600x600mm	MATT	'X' Pendulum 'X' Pendulum	RECTIFIED RECTIFIED RECTIFIED
300X600mm* 400x800mm* 300x600mm* 400x800mm*	MATT SEMI-POLISH	'X' Pendulum 'X' Pendulum -	RECTIFIED RECTIFIED RECTIFIED
600x600mm*	DECOR MATT	-	RECTIFIED

#### **FORMATS**



#### **GREIGE**







MATT

SEMI-POLISHED

DECORI



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

<sup>\*</sup> Indent item - Subject to stock availability overseas, please allow 6-10 weeks lead time from date of order confirmation. Minimum quantity may apply.



#### PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATINGS	TILE EDGE
300x300mm	MATT	'X' Pendulum	RECTIFIED
600x600mm	MATT	'X' Pendulum	RECTIFIED
600x600mm	SEMI-POLISH	-	RECTIFIED
300X600mm	* MATT	'X' Pendulum	RECTIFIED
400x800mm*	MATT	'X' Pendulum	RECTIFIED
300x600mm*	SEMI-POLISH	-	RECTIFIED
400x800mm*	SEMI-POLISH	-	RECTIFIED

<sup>\*</sup> Indent item - Subject to stock availability overseas, please allow 6-10 weeks lead time from date of order confirmation. Minimum quantity may apply.

#### **BUFF**



MATT SEMI-POLISHED

#### **FORMATS**

600x600mm

300x 300mm 300x600mm 400x800mm



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.




#### PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATINGS	TILE EDGE
300x300mm	MAH	`X' Pendulum	RECTIFIED
600x600mm	MATT	'X' Pendulum	RECTIFIED
600x600mm	SEMI-POLISH	-	RECTIFIED
300X600mm	* MATT	'X' Pendulum	RECTIFIED
400x800mm*	* MATT	'X' Pendulum	RECTIFIED
800x800mm*	* MATT	'X' Pendulum	RECTIFIED
300x600mm*	* SEMI-POLISH	-	RECTIFIED
400x800mm*	* SEMI-POLISH	-	RECTIFIED
800x800mm*	* SEMI-POLISH	-	RECTIFIED

<sup>\*</sup> Indent item - Subject to stock availability overseas, please allow 6-10 weeks lead time from date of order confirmation. Minimum quantity may apply.


#### **FORMATS**



#### **CHARCOAL**



MATT SEMI-POLISHED

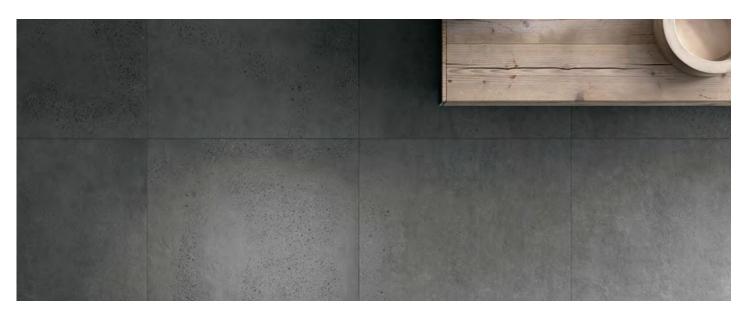



technical characteristics	test method	required values	value
water absorption	iso 10545-3	0,5% < E ≤ 3%	0,5% < E ≤ 2%
bending strength	iso 10545-4	≥ 27 N/mm²	≥ 32 N/mm²**
breaking strength (S)	iso 10545-4	≥ 1300 N	compliant
thermal shock resistance	iso 10545-9r	resistant	esistant
chemical resistance	iso 10545-13	-	resistant
length and width of the average sizes	iso 10545-2	± 0,5%	compliant
thickness	iso 10545-2	± 0,5%	compliant
warpages of edges	iso 10545-2	± 0,5%	compliant
wedging	iso 10545-2	± 0,6%	compliant
 flatness	iso 10545-2	± 0,5%	compliant