

Aggregate II



PRODUCT TYPE: Glazed porcelain

COLOURS: White, Pewter, Cotto and Gunmetal

SIZES: 300x300mm and 600x600mm
Rectified Edges


FINISHES/USAGE: Matt, Semi-Polish, Textured/Wall and Floor

AESTHETIC QUALITIES: Concrete look with 50% exposed aggregate.

TECHINICAL INFO: P3 'X' Pendulum Slip rating (Matt)
P4 'W' Pendulum Slip rating (Textured)
More technical data on the last page.

ORIGIN: Italy

VARIATION:



V3

With the impact of concrete and all the benefits of porcelain, the AGGREGATE II series is the best looking exposed aggregate tile on the market. The series contains an updated colour palette with easy maintenance finishes and large formats suitable for new or existing projects.

Aggregate II

PRODUCT SPECIFICATIONS

SIZES	FINISHES	TILE EDGE	SLIP RATINGS
300x300mm	MATT	RECTIFIED	P3 'X' Pendulum
600x600mm	MATT	RECTIFIED	P3 'X' Pendulum
600x600mm	SEMI-POLISH	RECTIFIED	-
600x600mm	TEXTURED	RECTIFIED	P4 'W' Pendulum

WHITE



MATT






SEMI-POLISH



TEXTURED

FORMATS

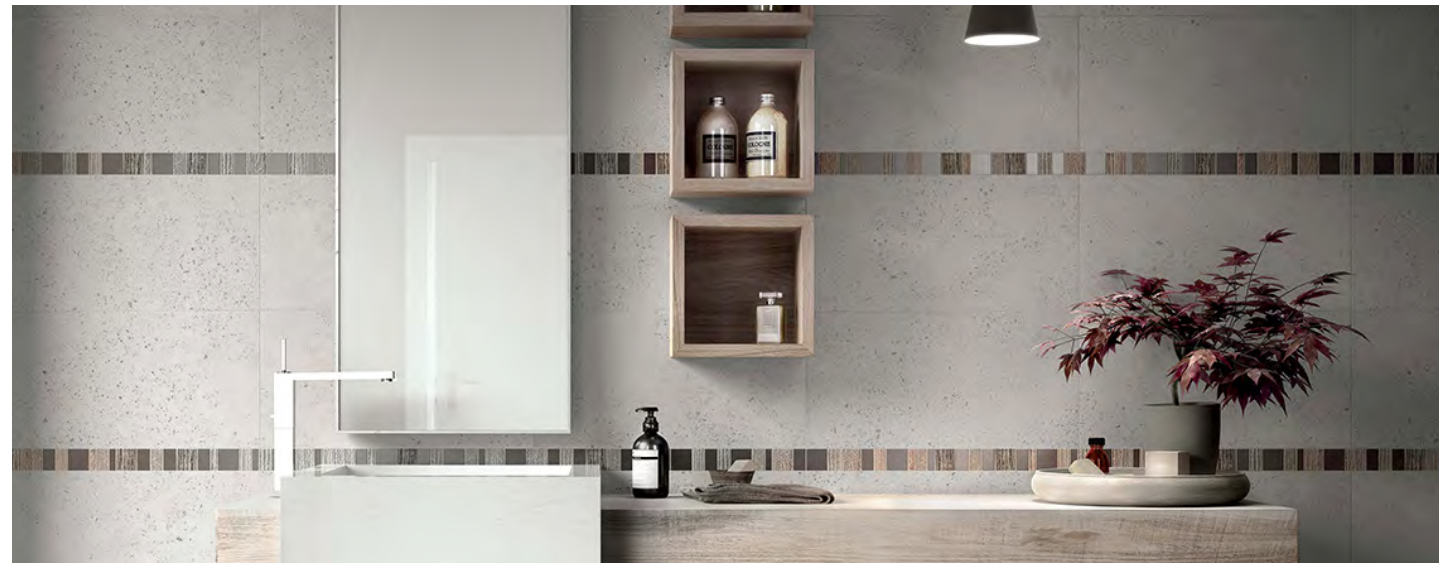

Aggregate II

PRODUCT SPECIFICATIONS

SIZES	FINISHES	TILE EDGE	SLIP RATINGS
300x300mm	MATT	RECTIFIED	P3 'X' Pendulum
600x600mm	MATT	RECTIFIED	P3 'X' Pendulum
600x600mm	SEMI-POLISH	RECTIFIED	-
600x600mm	TEXTURED	RECTIFIED	P4 'W' Pendulum

PEWTER



MATT





SEMI-POLISH



TEXTURED

FORMATS



Aggregate II

PRODUCT SPECIFICATIONS

SIZES	FINISHES	TILE EDGE	SLIP RATINGS
300x300mm	MATT	RECTIFIED	P3 'X' Pendulum
600x600mm	MATT	RECTIFIED	P3 'X' Pendulum
600x600mm	SEMI-POLISH	RECTIFIED	-
600x600mm	TEXTURED	RECTIFIED	P4 'W' Pendulum


COTTO



MATT





SEMI-POLISH

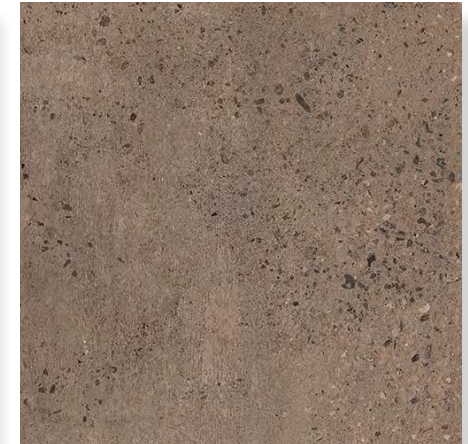

TEXTURED

FORMATS



Aggregate II


PRODUCT SPECIFICATIONS

SIZES	FINISHES	TILE EDGE	SLIP RATINGS
300x300mm	MATT	RECTIFIED	P3 'X' Pendulum
600x600mm	MATT	RECTIFIED	P3 'X' Pendulum
600x600mm	SEMI-POLISH	RECTIFIED	-
600x600mm	TEXTURED	RECTIFIED	P4 'W' Pendulum


GUNMETAL



MATT


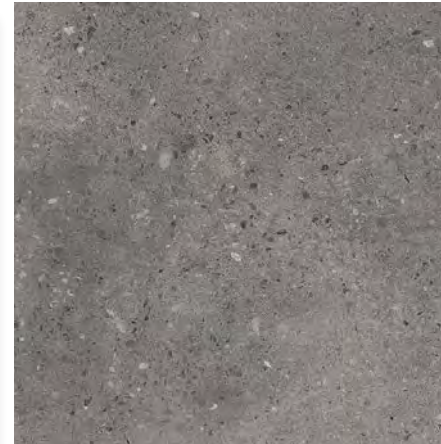


SEMI-POLISH

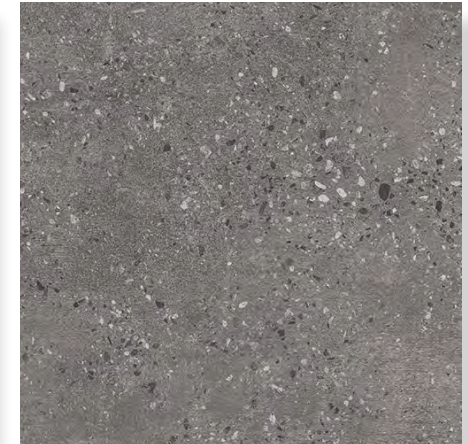

TEXTURED

FORMATS



Aggregate II

technical characteristics	test method	required values	value
water absorption	iso 10545-3	0,5% < E ≤ 3%	0,5% < E ≤ 2%
bending strength	iso 10545-4	≥ 27 N/mm ²	≥ 32 N/mm ^{2**}
breaking strength (S)	iso 10545-4	≥ 1300 N	compliant
thermal shock resistance	iso 10545-9r	resistant	esistant
chemical resistance	iso 10545-13	-	resistant
length and width of the average sizes	iso 10545-2	± 0,5%	compliant
thickness	iso 10545-2	± 0,5%	compliant
warpages of edges	iso 10545-2	± 0,5%	compliant
wedging	iso 10545-2	± 0,6%	compliant
flatness	iso 10545-2	± 0,5%	compliant