

# Aspen



ASPEN is a modern twist on timbers with the use of a non traditional grey colour palette.

**PRODUCT TYPE:** Glazed colour-bodied porcelain

**COLOURS:** Greige, Grey, Charcoal and Black

**SIZES:** 150x900mm and 75x450mm  
Rectified edges


**FINISHES/USAGE:** Textured, Textured Chevron/Wall & floor

**AESTHETIC QUALITIES:** Natural wood appearance and surface finish

**TECHINICAL INFO:** P4 Pendulum Slip rating (The Aspen Black and Greige does not achieve this rating)

See last page for more technical data

**VARIATION:**



V1

# Aspen



## PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
150x900mm	TEXTURED	P4 Pendulum	RECTIFIED
75x450mm	TEXTURED CHEVRON	P4 Pendulum	RECTIFIED


\*The Aspen Black and Greige does not achieve a P4 Pendulum Slip Rating.

Brick bond laying pattern where the grout joint is in the middle of the adjacent tile is not suggested as it highlights potential flatness irregularities. Due to surface flatness tolerance in most large size tiles (including timber look tiles), it is suggested to offset the tiles with no more than 30% of the tile length. Eg. 900mm long, should be laid with an offset no larger than 270mm.

## FORMATS



## COMPLETE SERIES

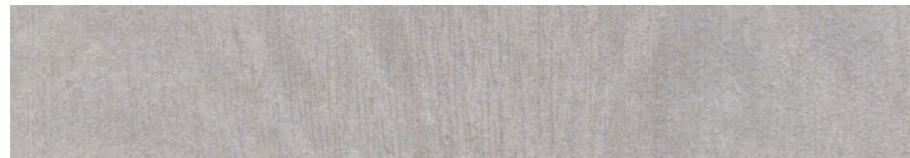

GREIGE



GREY



CHARCOAL



BLACK\*




# Aspen

## PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
150x900mm	TEXTURED	P4 Pendulum	RECTIFIED
75x450mm	TEXTURED CHEVRON	P4 Pendulum	RECTIFIED

\*The Aspen Greige does not achieve a P4 Pendulum Slip Rating.

## FORMATS

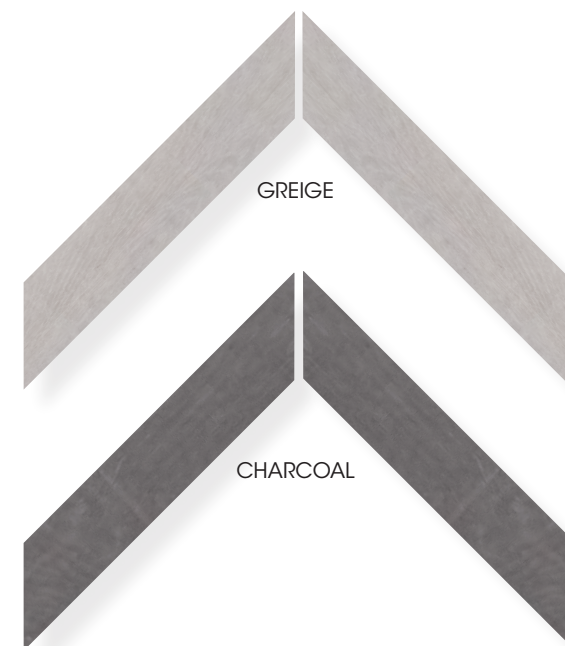

# Aspen



# Aspen



# Aspen



# Aspen

<b>technical characteristics</b>	<b>test method</b>	<b>required values</b>	<b>value</b>
water absorption	iso 10545-3	0,5% < E ≤ 3%	pass
breaking strength (S)	iso 10545-4	≥ 1300 N	pass
thermal shock resistance	iso 10545-9	resistant	pass
chemical resistance	iso 10545-13	minimum GB	Class GA pass
length and width of the average sizes	iso 10545-2	± 0,5%	pass
surface quality	iso 10545-2	minimum of 95% of tiles free from visible defects	pass