



Modern, concrete-like tactile look, FORM series is available in three colours in matt and grip finishes.

**PRODUCT TYPE**: Glazed porcelain

**COLOURS:** Grey, Taupe and Black

**SIZES:** 300x300mm, 300x600mm, 600x600mm

and 800x800mm (Matt) 300x600mm

(Grip)

Rectified edges

FINISHES/USAGE: Matt/Floor and Wall

Grip/Floor and Wall

**AESTHETIC QUALITIES:** Concrete-like tactile effect

**TECHNICAL DATA**: X 'P3' Pendulum slip rating (Matt)

W 'P4' Pendulum slip rating (Grip) More technical data on the last page

**VARIATION:** 







### PRODUCT SPECIFICATIONS

SIZES	FINISHES	TILE EDGE	SLIP RATINGS
300x300mm	MATT	RECTIFIED	P3 'X' PENDUI UM
300330011111			. 0 /
300x600mm	MATT	RECTIFIED	P3 'X' PENDULUM
600x600mm	MATT	RECTIFIED	P3 'X' PENDULUM
800x800mm	MATT	RECTIFIED	P3 'X' PENDULUM
300x600mm	GRIP	RECTIFIED	P4 'W' Pendulum

## FORMATS

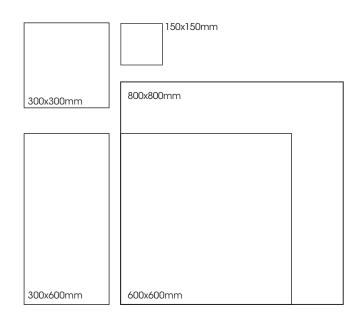

### **GREY**

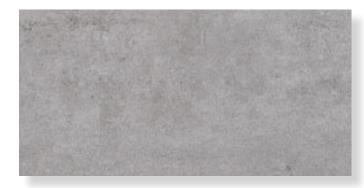

MATT



### **TAUPE**



MATT



GRIP




### PRODUCT SPECIFICATIONS

SIZES	FINISHES	TILE EDGE	SLIP RATINGS
300x300mm	MATT	RECTIFIED	P3 'X' PENDULUM
300x600mm	MATT	RECTIFIED	P3 'X' PENDULUM
600x600mm	MATT	RECTIFIED	P3 'X' PENDULUM
300x600mm	GRIP	RECTIFIED	P4 'W' Pendulum

#### **FORMATS**





#### **BLACK**



MATT



GRIP







	technical characteristics Group B I a	test method	required values	value
۵ ۵ ۵ ۵ ۵	water absorption	iso 10545-30	≤ 0.5%	.21%
ß	bending strength	iso 10545-4	≥12MPA	≥33.5MPA
ß	breaking strength (S)	iso 10545-4	≥ 350 N	≥ 1785N
	abrasion resistace	iso 10545-7	Max. 175 mm³ PEI 1-5	Class3
	chemical resistance	iso 10545-13	Household chemicals and swimming pool salts	GA
•			Low concentration of acids and alkalis	GLA
Z	stain resistance	iso 10545-14	Minimum Class 3	Class 5