

# Terrazzo



**PRODUCT TYPE:** Terrazzo composite tile

**COLOURS:** Whitecap, Fusion, Paloma and Phantom

**SIZES:** 600x600x12mm, 600x1200x12mm  
Rectified edges


**FINISHES/USAGE:** Honed/Wall and Floor

**AESTHETIC QUALITIES:** Real terrazzo with porcelain benefits

**TECHNICAL INFO:** P2 Pendulum (Honed)

- Porcelain installation procedure
- No wrapping after installation
- Easy to maintain and stable
- Lightweight format

**VARIATION:**



V3

Terrazzo Series is our new terrazzo composite tile featuring four contemporary colours and a honed finish.


# Terrazzo

## PRODUCT SPECIFICATIONS


SIZES	FINISHES	SLIP RATING	TILE EDGE
600x600x12mm	HONED	P2 Pendulum	RECTIFIED
600x1200x12mm	HONED	P2 Pendulum	RECTIFIED

\*Please note, 600x1200mm only available in Whitecap, for other colours please allow 16 weeks from date of order.

## FORMATS




600x600x12mm




600x1200x12mm

### TERRAZZO COMPOSITE TILE TECHNICAL INFORMATION

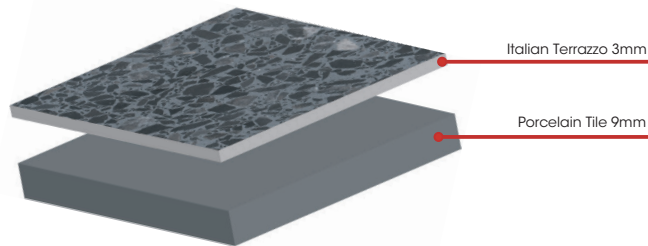


### ADVANTAGES TO USAGE


- Stable
- Porcelain installation procedure
- Easy to maintain
- Suitable for commercial and residential
- No Wrapping after installation
- Light weight (12mm in thickness) compare to traditional terrazzo
- More efficient and simpler to handle and install then traditional terrazzo

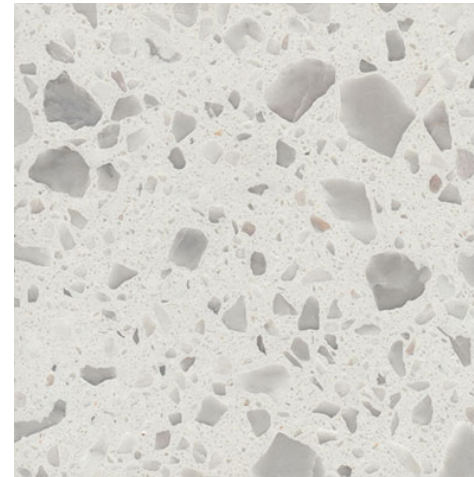


WHITECAP

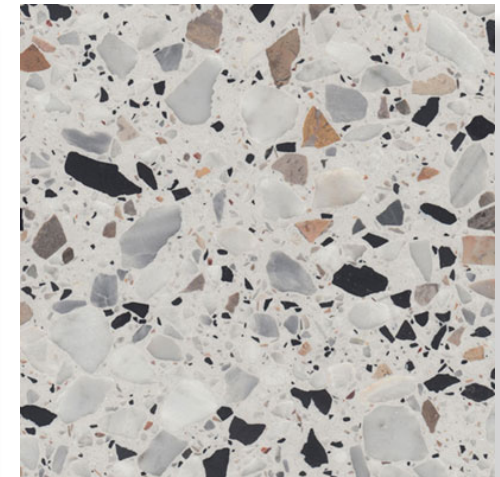

FUSION

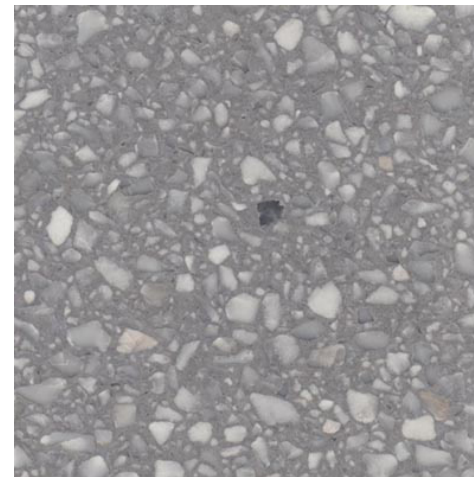



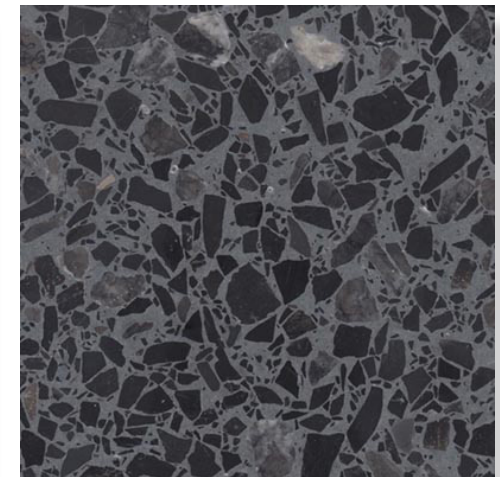



PALOMA



PHANTOM

# Terrazzo

technical characteristics	test method	required values	result
 water absorption	ISO 10545-3	0.5% < E < 3%	2.4%
 modulus of rupture	ISO 10545-4	min 30MPa	37.4MPa
 stain resistance	ISO 10545-13	Min Class 2	Pass
 breaking strength	ISO 10545-4	>1100N	1800N
 abrasion resistance	ISO 10545-7	< 26	15.7
 chemical resistance	ISO 10545-13	Pass	Pass

# Terrazzo



# Terrazzo

