



ARIA is a contemporary series that displays subtle movement and colour variation for a soft limestone look. Available in four colours and three finishes including a feature chevron tile. ARIA is able to add extra design elements to any environment.

PRODUCT TYPE: Porcelain Glazed Tile

COLOURS: Ivory, Ash, Taupe and Deep Taupe

SIZES: 300x300mm 300x600mm and

600x600mm Rectified edges

FINISHES/USAGE: Matt/Wall and Floor

Grip/Floor Only Chevron/ Wall Only

AESTHETIC QUALITIES: Subtle movement and colour variation

TECHINICAL INFO: P3 Pendulum Slip rating/Matt

P4 Pendulum Slip rating/Grip

There is inherent variation in colour and calibration between Aria base tiles and Aria Chevron tiles due to the

different production process.

Please inspect the tiles carefully prior to

installation.

More technical data on last page

VARIATION:





PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
300x300mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	MATT	P3 Pendulum	RECTIFIED
600x600mm	MATT	P3 Pendulum	RECTIFIED
300x600mm*	GRIP	P4 Pendulum	RECTIFIED
300x600mm	CHEVRON	-	RECTIFIED


^{*}Please note - Ivory is not available in the Grip finish



IVORY IVORY CHEVRON



FORMATS











PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
200-200	NAATT	D2 Dava alvelousa	DEOTIFIED
300x300mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	MATT	P3 Pendulum	RECTIFIED
600x600mm	MATT	P3 Pendulum	RECTIFIED
300x600mm*	GRIP	P4 Pendulum	RECTIFIED
300x600mm	CHEVRON*	-	RECTIFIED


^{*}Please note - Deep Taupe is not available in Chevron



TAUPE TAUPE CHEVRON




FORMATS





DEEP TAUPE



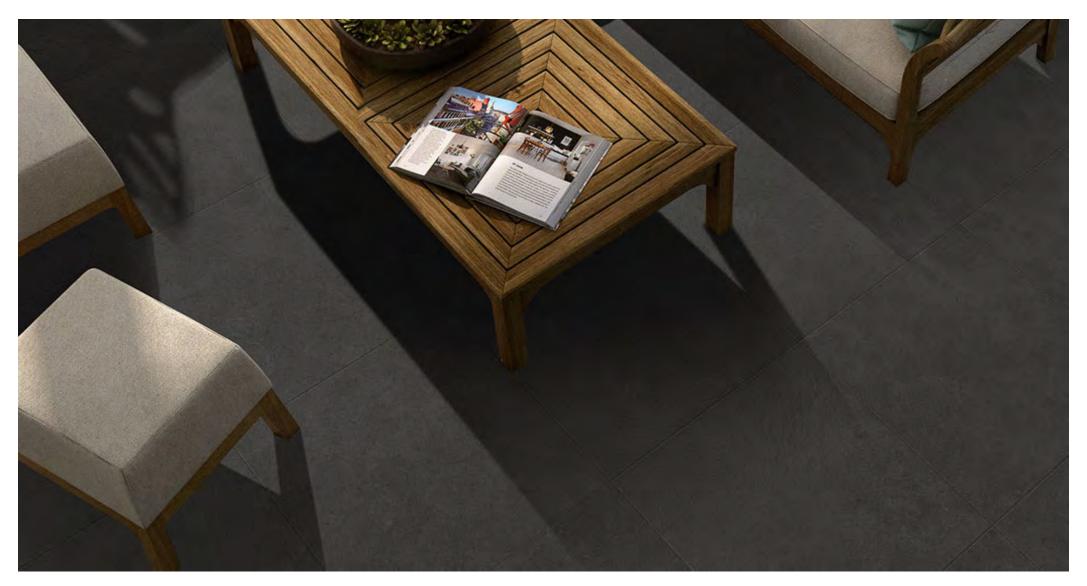











TECHNICAL DATA

Technical Characteristis	Test Method	Requirement	Result
Surface quality	ISO 10545-2	95%	100%
Length and Width	ISO 10545-2	‡ 0,6%	0.5%
Thickness	ISO 10545-2	‡ 0,5	‡ 0,5
Straightness of sides	ISO 10545-2	‡ 0,5%	‡ 0,3%
Water Absorbtion	ISO 10545-3	3%	3%
Modulus of Rupture	ISO 10545-4	35	38
Breaking Strength	ISO 10545-4	1100	1300
Crazing Resistance	ISO 10545-11	Pass	Resistant
Chemical Resistance	ISO 10545-13	Declared Value	ULA / UHB
Stain Resistance	ISO 10545-14	Minimum Class 3	Class 5