



Made in Italy, ALPES MAX Series combines stone, marble and metal textures to create a crossover style ideal for most designs. Their large slab formats allow it to be used in residential and commercial spaces. Available in four colours and three versatile sizes.

PRODUCT TYPE: Porcelain Slab

**COLOURS:** Ivory, Sand, Grey and Lead

SIZES: 1200x1200x7mm,1200x2400x7mm and

1600x3200x6mm Rectified edges

FINISHES/USAGE: Natural/Wall and Floor

**AESTHETIC QUALITIES:** Metal and Natural Stone look slabs

TECHNICAL DATA: The 1200x2400mm format has 6

different faces

More information on last page

ORIGIN: Italy


VARIATION:






### **TECHNICAL QUALITIES**

Slim porcelain slabs allowing endless custom design opportunities such as joinery cladding, internal and external facades.

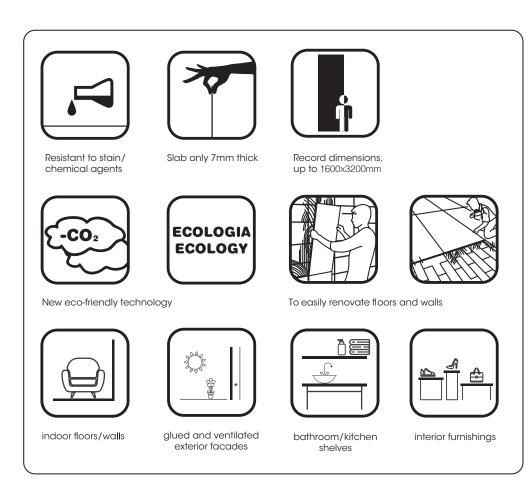

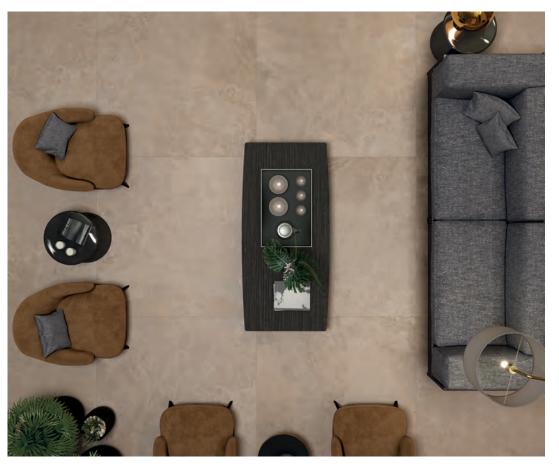




### PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
1200x1200mm* 1200x2400mm 1600x3200mm*	NATURAL NATURAL NATURAL	- - -	RECTIFIED RECTIFIED RECTIFIED

\*Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.

### **FORMATS**

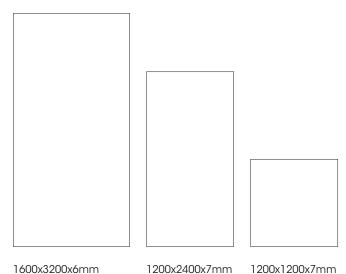





LEAD




### PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
1200x1200mm*	NATURAL	-	RECTIFIED
1200x2400mm* 1600x3200mm*	NATURAL NATURAL	-	RECTIFIED RECTIFIED

\*Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.

### **FORMATS**

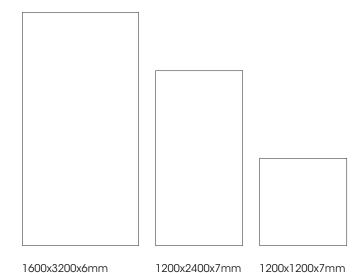





Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



### **VARIATION - IVORY AND LEAD**






### **VARIATION - SAND AND GREY**










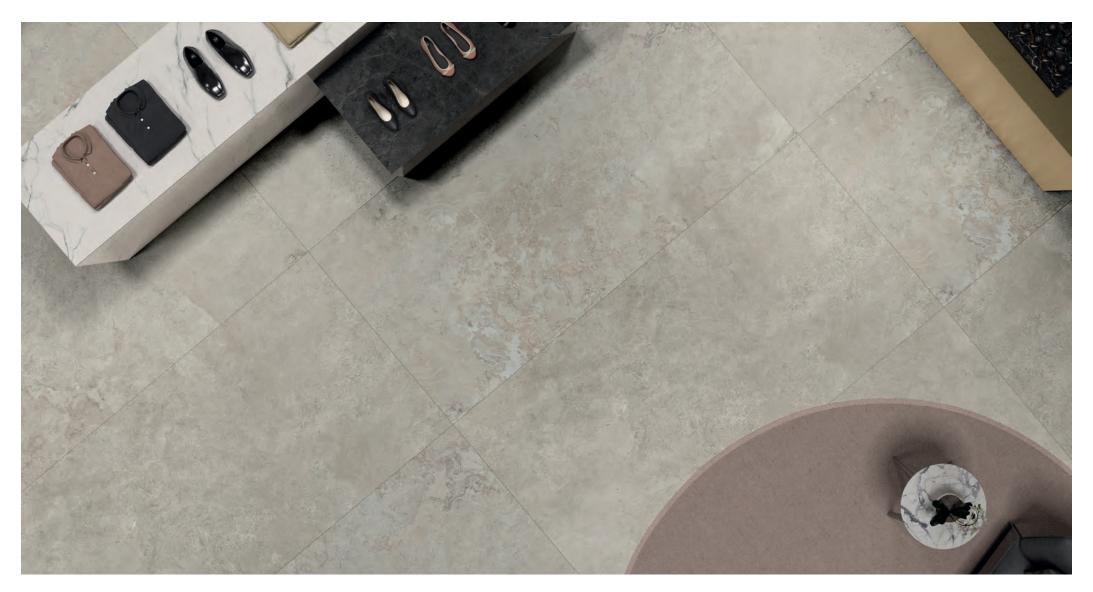



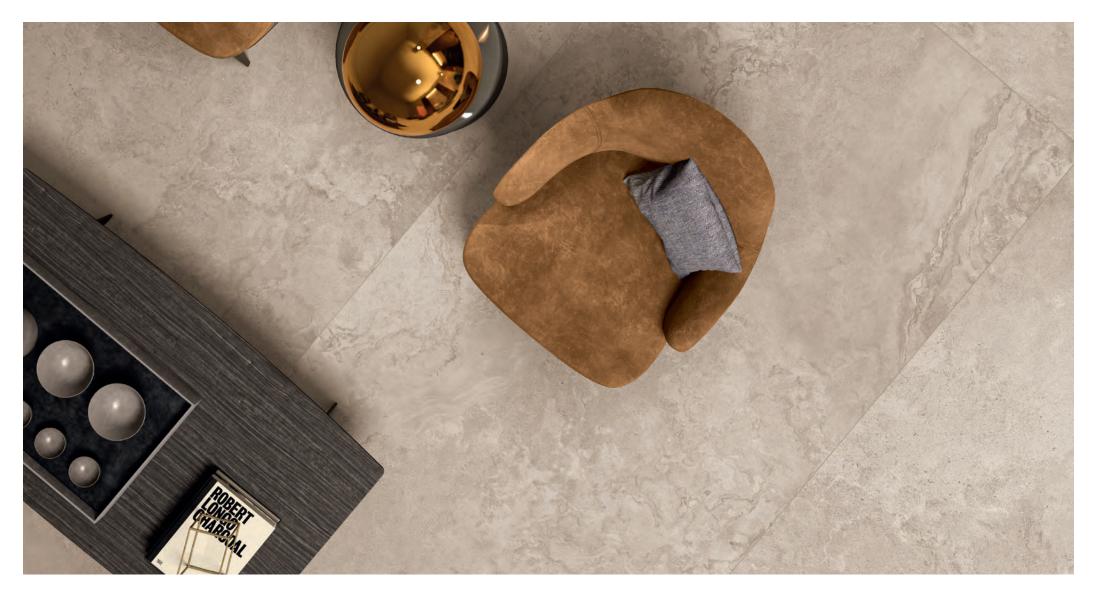



### TECHNICAL DATA

Technical Characteristis	Test Standard	Product Standard	Result	
Length and Width	ISO 10545-2+	/-0,6% (+/-2mm)	Complies	
Thickness	ISO 10545-2	+/-0,5% (+/-5mm)	Complies	
Straightness of sides	ISO 10545-2	+/-0,5% (+/-1,5mm)	Complies	_
Rectangularity	ISO 10545-2	+/-0,5% (+/-2mm)	Complies	_
Water Absorption	ISO 10545-3	Eb 0,5%	Eb 0,3%	_
Breaking Strength	ISO 10545-4	min 1300	>1500	
Modulus of Rupture	ISO 10545-4	min 35	45	_
Warp	ISO 10545-2	Deviation % Max ‡ 0,5	Complies	
Thermal Shock	ISO 10545-9	Test method available	Resistant	
Frost Resistance	ISO 10545-12	Required	Resistant	_
Resistance to household chemicals	ISO 10545-13	min GB	min GA	