

# Aria



ARIA is a contemporary series that displays subtle movement and colour variation for a soft limestone look. Available in four colours and three finishes including a feature chevron tile. ARIA is able to add extra design elements to any environment.

**PRODUCT TYPE:** Glazed Porcelain

**COLOURS:** Ivory, Ash, Taupe and Deep Taupe

**SIZES:** 300x300mm 300x600mm and  
600x600mm  
Rectified edges

**FINISHES/USAGE:** Matt/Wall and Floor  
Grip/Floor Only  
Chevron/ Wall Only


**AESTHETIC QUALITIES:** Subtle movement and colour variation

**TECHNICAL INFO:** P3 Pendulum Slip rating/Matt  
P4 Pendulum Slip rating/Grip

There is inherent variation in colour and calibration between Aria base tiles and Aria Chevron tiles due to the different production process. Please inspect the tiles carefully prior to installation.

More technical data on last page

**VARIATION:**



V2



# Aria

## PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
300x300mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	MATT	P3 Pendulum	RECTIFIED
600x600mm	MATT	P3 Pendulum	RECTIFIED
300x600mm*	GRIP	P4 Pendulum	RECTIFIED
300x600mm	CHEVRON	-	RECTIFIED

\*Please note - Ivory is not available in the Grip finish


## FORMATS

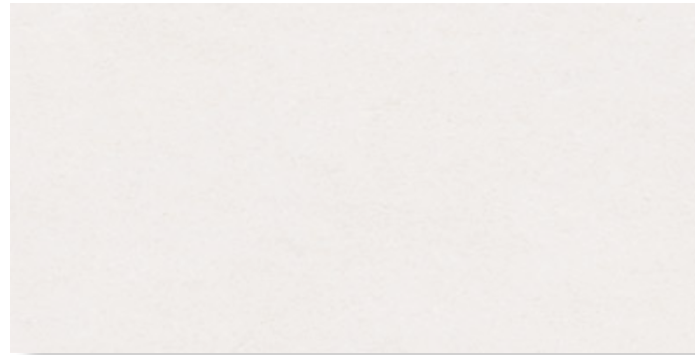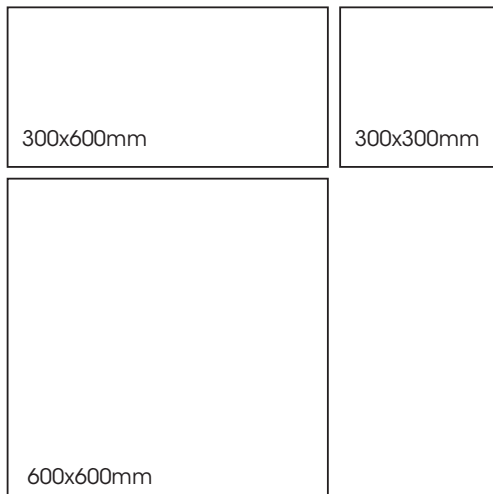


IVORY



IVORY CHEVRON

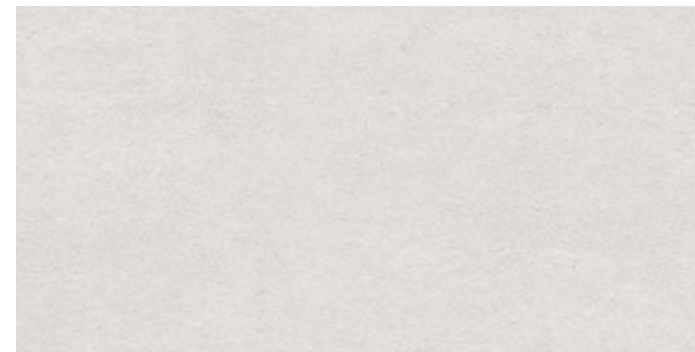

ASH

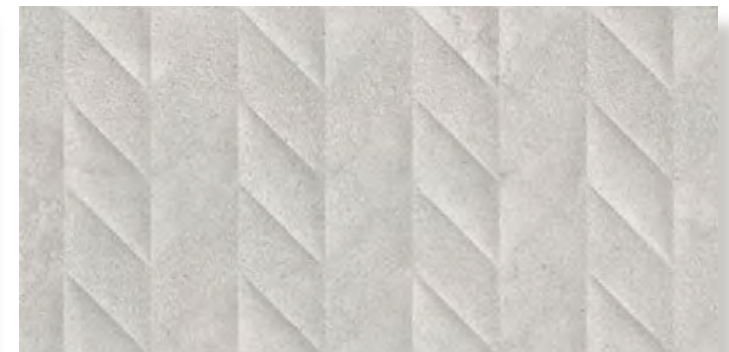

ASH CHEVRON

# Aria

## PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
300x300mm	MATT	P3 Pendulum	RECTIFIED
300x600mm	MATT	P3 Pendulum	RECTIFIED
600x600mm	MATT	P3 Pendulum	RECTIFIED
300x600mm*	GRIP	P4 Pendulum	RECTIFIED
300x600mm	CHEVRON*	-	RECTIFIED

\*Please note - Chevron is not available in Dark Taupe





TAUPE



TAUPE CHEVRON

## FORMATS

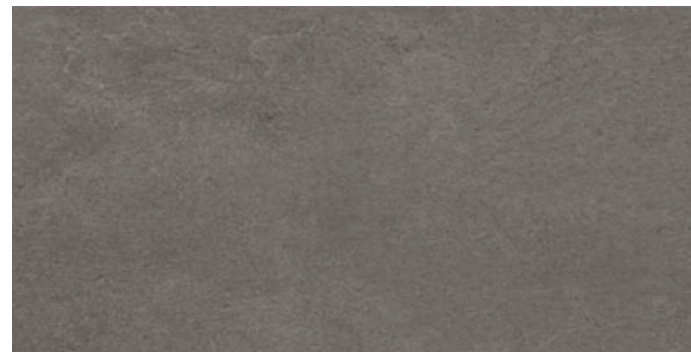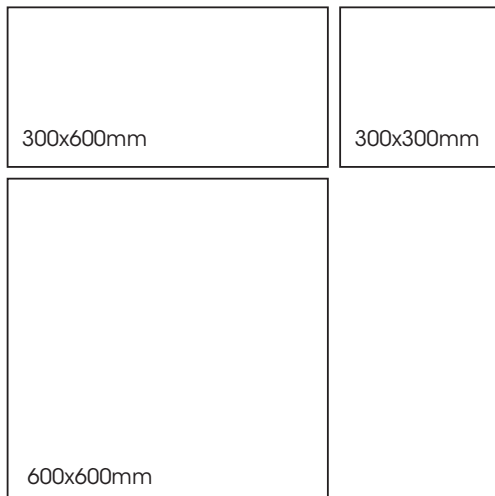

DEEP TAUPE

# Aria



# Aria



# Aria



## TECHNICAL DATA

Technical Characteristic	Test Method	Requirement	Result
Surface quality	ISO 10545-2	95%	100%
Length and Width	ISO 10545-2	± 0,6%	0.5%
Thickness	ISO 10545-2	± 0,5	± 0,5
Straightness of sides	ISO 10545-2	± 0,5%	± 0,3%
Water Absorbtion	ISO 10545-3	3%	3%
Modulus of Rupture	ISO 10545-4	35	38
Breaking Strength	ISO 10545-4	1100	1300
Crazing Resistance	ISO 10545-11	Pass	Resistant
Chemical Resistance	ISO 10545-13	Declared Value	ULA / UHB
Stain Resistance	ISO 10545-14	Minimum Class 3	Class 5