

Aspen



ASPEN is a modern twist on timbers with the use of a non traditional grey colour palette.

PRODUCT TYPE: Glazed Porcelain

COLOURS: Greige, Grey, Charcoal and Black


SIZES: 150x900mm and 75x450mm
Rectified edges

FINISHES/USAGE: Textured, Textured Chevron/Wall & floor

AESTHETIC QUALITIES: Natural wood appearance and surface finish

TECHINICAL INFO: P3 Pendulum Slip rating (The Aspen Black and Greige does not achieve this rating)
Brick bond laying pattern where the grout joint is in the middle of the adjacent tile is not suggested.
See last page for more technical data and reccomendations

VARIATION:



V1


Aspen

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
150x900mm	TEXTURED	P3 Pendulum	RECTIFIED
75x450mm	TEXTURED CHEVRON	P3 Pendulum	RECTIFIED

*The Aspen Black and Greige does not achieve a P3 Pendulum Slip Rating.
Aspen Greige has a P2 slip rating

FORMATS



GREIGE




GREY



CHARCOAL



BLACK*

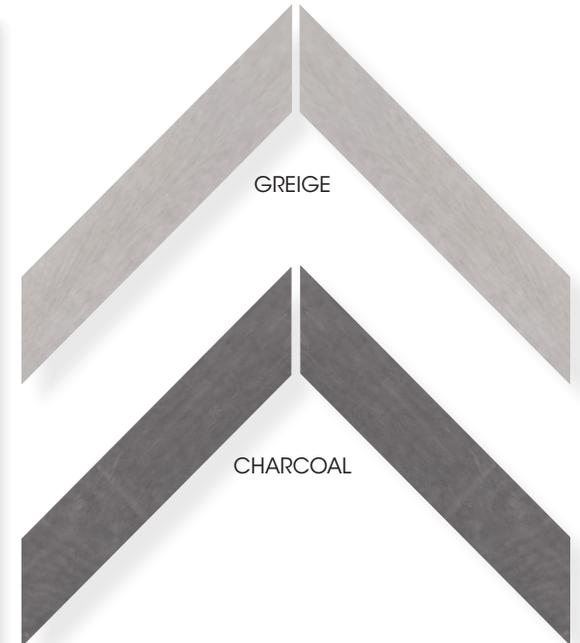

GREIGE

CHARCOAL

Aspen



Aspen



Aspen



TECHNICAL DATA

technical characteristics	test method	required values	value
water absorption	iso 10545-3	$0,5\% < E \leq 3\%$	pass
breaking strength (S)	iso 10545-4	$\geq 1300 \text{ N}$	pass
thermal shock resistance	iso 10545-9	resistant	pass
chemical resistance	iso 10545-13	minimum GB	Class GA pass
length and width of the average sizes	iso 10545-2	$\pm 0,5\%$	pass
surface quality	iso 10545-2	minimum of 95% of tiles free from visible defects	pass

PLEASE NOTE:

Brick bond laying pattern where the grout joint is in the middle of the adjacent tile is not suggested as it highlights potential flatness irregularities. Due to surface flatness tolerance in most large size tiles (including timber look tiles), it is suggested to offset the tiles with no more than 30% of the tile length. Eg. 900mm long, should be laid with an offset no larger than 270mm.