

Carriere



PRODUCT TYPE: Coloured-bodied porcelain

COLOURS: Bruges, Gent and Namur

SIZES: 600x1200mm, 800x1800mm and
200x200mm
Rectified edges


FINISHES/USAGE: Natural, Lappato and Grip/Wall and
Floor

AESTHETIC QUALITIES: Stone and Concrete look tiles

TECHNICAL DATA: P3 Pendulum Slip rating (Natural)
P4 Pendulum Slip rating (Grip)
More technical data on the last page

ORIGIN: Italy

VARIATION:



V2

Made in Italy, CARRIERE is the matching tile series to CARRIERE MAX. It represents the innovative combination of stone and concrete look porcelain slabs, to achieve a contemporary design.

Carriere

NAMUR

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
600x1200mm*	NATURAL	P3 Pendulum	RECTIFIED
800x1800mm*	NATURAL	P3 Pendulum	RECTIFIED
200x200mm*	NATURAL	P3 Pendulum	RECTIFIED
600x1200mm*	LAPPATO	-	RECTIFIED
800x1800mm*	LAPPATO	-	RECTIFIED
200x200mm*	GRIP	P4 Pendulum	RECTIFIED
600x1200mm*	GRIP	P4 Pendulum	RECTIFIED

*Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.

FORMATS



NATURAL



LAPPATO



GRIP

Carriere

GENT

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
600x1200mm*	NATURAL	P3 Pendulum	RECTIFIED
800x1800mm*	NATURAL	P3 Pendulum	RECTIFIED
200x200mm*	NATURAL	P3 Pendulum	RECTIFIED
600x1200mm*	LAPPATO	-	RECTIFIED
800x1800mm*	LAPPATO	-	RECTIFIED
200x200mm*	GRIP	P4 Pendulum	RECTIFIED
600x1200mm*	GRIP	P4 Pendulum	RECTIFIED

*Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.

FORMATS



NATURAL



LAPPATO



GRIP

Carriere


BRUGES

PRODUCT SPECIFICATIONS


SIZES	FINISHES	SLIP RATING	TILE EDGE
600x1200mm*	NATURAL	P3 Pendulum	RECTIFIED
800x1800mm*	NATURAL	P3 Pendulum	RECTIFIED
200x200mm*	NATURAL	P3 Pendulum	RECTIFIED
600x1200mm*	LAPPATO	-	RECTIFIED
800x1800mm*	LAPPATO	-	RECTIFIED
200x200mm*	GRIP	P4 Pendulum	RECTIFIED
600x1200mm*	GRIP	P4 Pendulum	RECTIFIED

*Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.

FORMATS

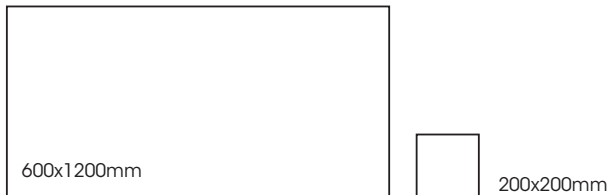

NATURAL

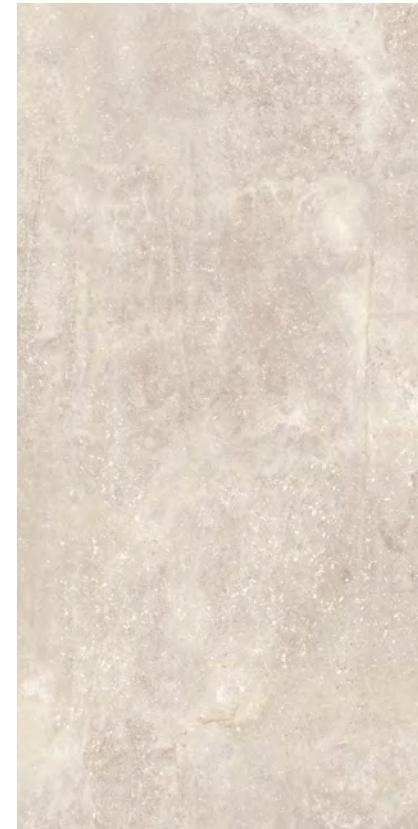

LAPPATO



GRIP

Carriere










Carriere



Carriere



	technical characteristics	test method	required values	result
	water absorbtion	ISO 10545-3	$\leq 0,5 \%$	$E < = 0,04 \%$
	bending strength	ISO 10545-4	$R \geq 35 \text{ N/mm}^2$	53 N/mm ²
	surface quality	ISO 10545-2	$N \geq 15 \text{ cm mm}$	complies with standard
	impact resistance	ISO 10545-5	declared value	0,88
	deep abrasion resistance	ISO 10545-6	$\leq 175 \text{ mm}^3$	$< 128 \text{ mm}^3$
	chemical resistance	ISO 10545-13	UB MIN.	UA ULA UHA
	resistance to frost	ISO 10545-12	must comply	no damage