

# Casablanca



**PRODUCT TYPE:** Ceramic Wall Tile

**COLOURS:** Pearl, Blush, Sky Blue, Grey, Jade, Carbon, Blue, Honey, Deep Blush and Cream

**SIZES:** 132x132mm and 65x200mm  
Non-Rectified Edges


**FINISHES/USAGE:** Gloss/Wall only

**AESTHETIC QUALITIES:** Vast colour range with organic variation

**ORIGIN:** Spain

**TECHNICAL DATA:** More information on last page

**VARIATION:**




V4

Imported from Spain, our Casablanca Series is inspired by Moroccan Zellige tiles. Available in two formats and a variety of colours.


# Casablanca

## PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATINGS	TILE EDGE
132x132mm	GLOSS	-	NON-RECTIFIED
65x200mm	GLOSS	-	NON-RECTIFIED

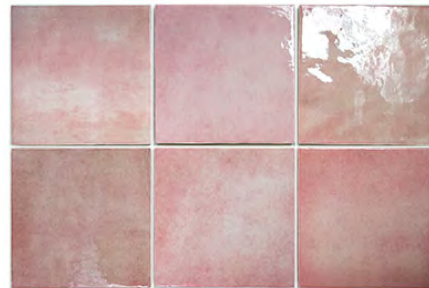

BLUSH GLOSS


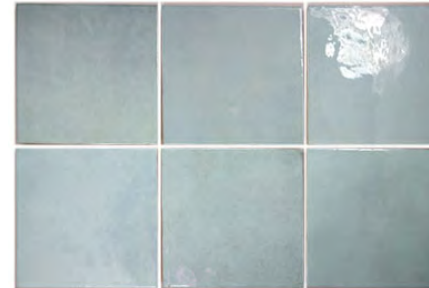


SKY BLUE GLOSS




PEARL GLOSS

## FORMATS

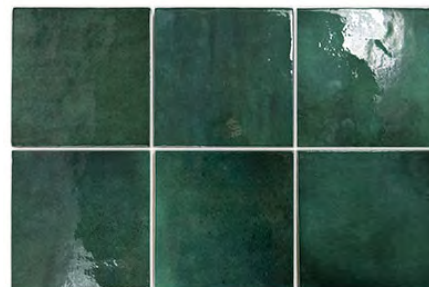

JADE GLOSS

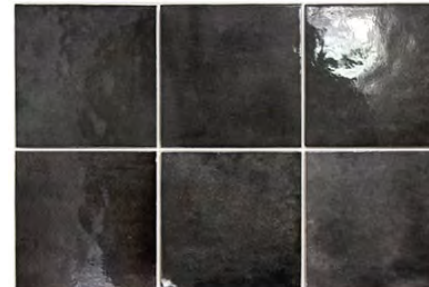

CARBON GLOSS



GREY GLOSS



# Casablanca

## PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATINGS	TILE EDGE
132x132mm*	GLOSS	-	NON-RECTIFIED
65x200mm*	GLOSS	-	NON-RECTIFIED

\* Indent item - Subject to stock availability overseas, please allow 10-12 weeks lead time from date of order confirmation. Minimum quantity may apply.


## FORMATS

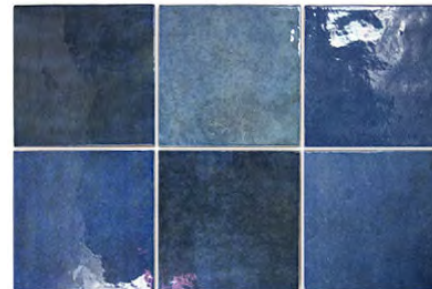


BLUE GLOSS



HONEY GLOSS

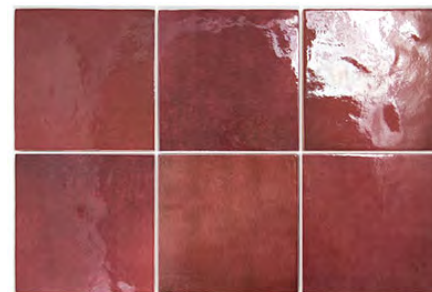

DEEP BLUSH GLOSS

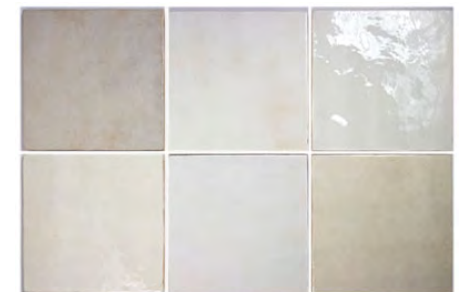


CREAM GLOSS

# Casablanca


## BRICK FORMAT 65x200mm



PEARL GLOSS

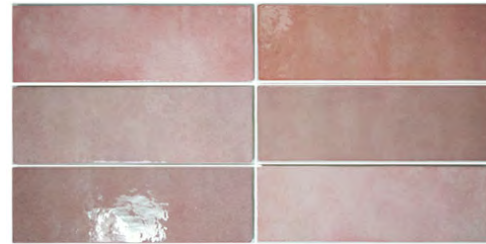

BLUSH GLOSS

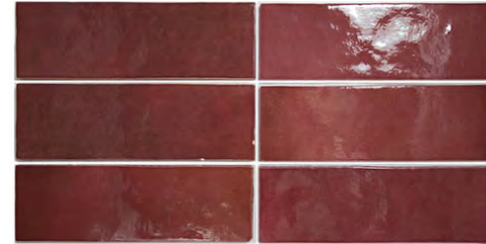


DEEP BLUSH GLOSS



CREAM GLOSS




GREY GLOSS

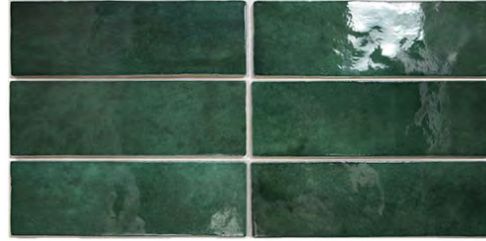


JADE GLOSS




HONEY GLOSS

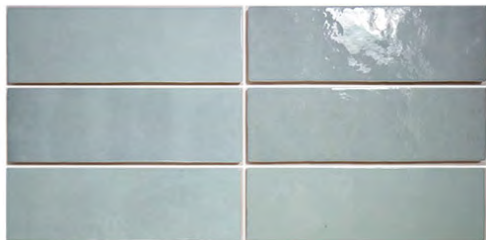


SKY BLUE GLOSS

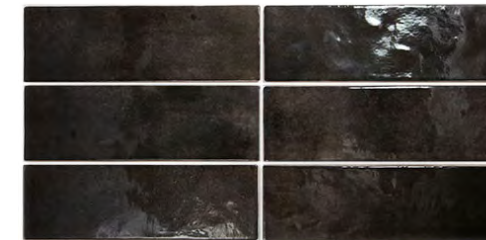

CARBON GLOSS

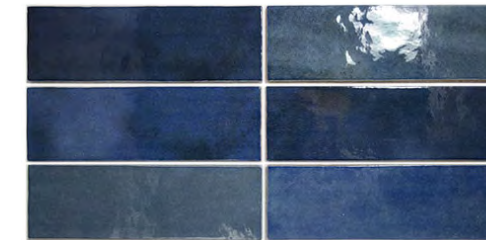

BLUE GLOSS

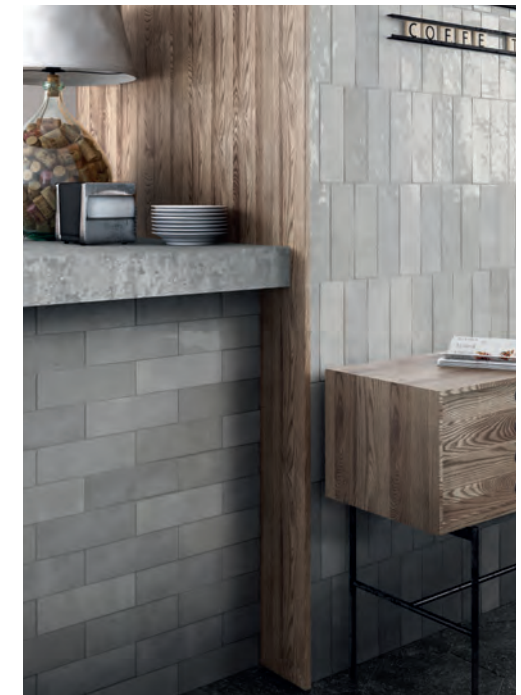

# Casablanca



# Casablanca










# Casablanca



## TECHNICAL DATA

# Casablanca

	technical characteristics	test method	result
	water absorption	EN ISO 10545-3	> 10 % (BIII)
	modulus of rupture	EN ISO 10545-4	> 12 N/mm <sup>2</sup>
	surface quality	EN ISO 10545-2	complies
	breaking strength	EN ISO 10545-4	> 600 N
	abrasion resistance	EN 101	3
	chemical resistance	EN ISO 10545-13	GLA   GHB   GA
	resistance to thermal shock	EN ISO 10545-9	Guaranteed