

Jazz



A collection of 100x300mm Porcelain Glazed tiles with gloss and matt finishes, suitable for floor and external facades. The glazed gloss and matt tiles can also be provided with an Antibacterial Protection* enriching the tiles with more hygiene and ease of maintenance.

PRODUCT TYPE: Glazed Porcelain

COLOURS: White, Pale Grey, Charcoal, Black, Yellow, Red and Cobalt

SIZES: 100x300mm
Non-rectified edges

FINISHES/USAGE: Matt/Floor (soft shoe only)
Gloss/Wall only


AESTHETIC QUALITIES: A modular sleek tile in an abundance of colours that are complementary to each other

TECHNICAL INFO: *A 200 metre minimum order is required when ordering Antibacterial protection

More technical data on the last page

ORIGIN: Turkey

VARIATION:




V1

Jazz


PRODUCT SPECIFICATIONS

SIZES	FINISHES	TILE EDGE
100x300mm	GLOSS	NON-RECTIFIED
100x300mm	MATT	NON-RECTIFIED


FORMATS




WHITE GLOSS

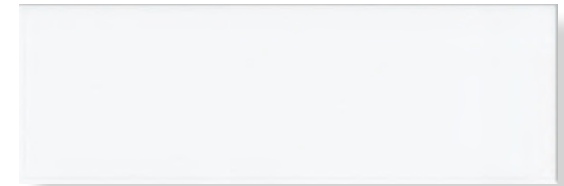


WHITE MATT

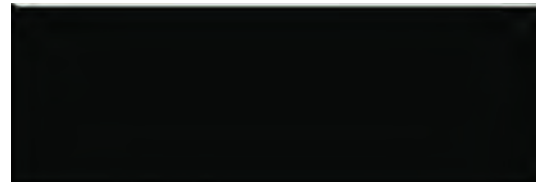


BLACK GLOSS

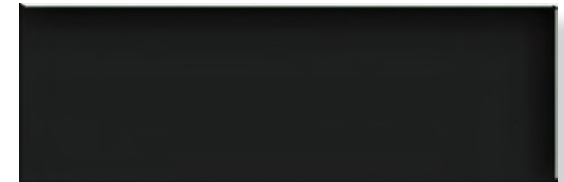

BLACK MATT

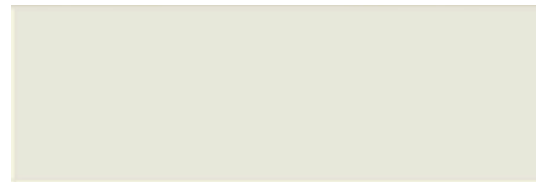


PALE GREY GLOSS

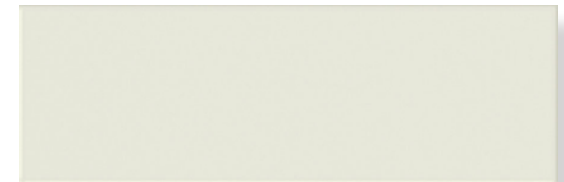

PALE GREY MATT



CHARCOAL GLOSS

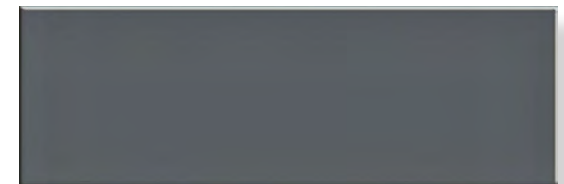

CHARCOAL MATT


Jazz

PRODUCT SPECIFICATIONS


SIZES	FINISHES	TILE EDGE
100x300mm	GLOSS	NON-RECTIFIED
100x300mm	MATT	NON-RECTIFIED



RED GLOSS

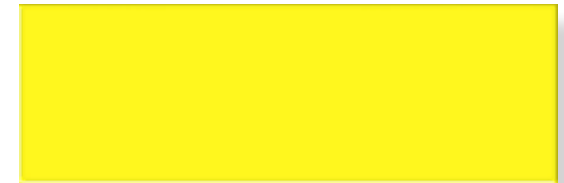

YELLOW MATT

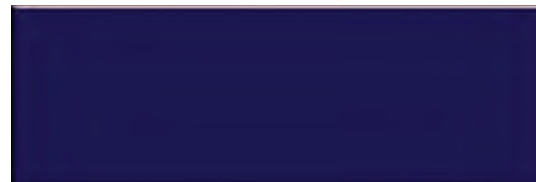

COBALT GLOSS

FORMATS










Jazz



Jazz



TECHNICAL DATA

	technical characteristics	test method	required values	value
	water absorption	iso 10545-3	0,5%<E≤ 3%	0,5%<E≤ 3%
	frost resistance	iso 10545-12	no alterations	resistant
	breaking strength (S)	iso 10545-4	Min. 1300N For thickness ≥ 7,5mm Min. 700N For thickness < 7,5mm	>700N
	thermal shock resistance	iso 10545-9	test method available	resistant
	chemical resistance	iso 10545-13	resistant	resistant
	stain resistance	iso 10545-14	test method available	class 3
	surface abrasion	iso 10545-7	Report Abrasion Class and cycles passed	PEI 1-4

ENVIRONMENTAL CERTIFICATION



ISO:14001 2004

ANTIBACTERIAL TREATMENT*

The wall tile can be treated with an antibacterial treatment that is added before the firing process and has a life expectancy equal to the tile itself. Antibacterial treatment is added protection for spaces where superior health and hygiene are a must such as hospitality and medical areas.

*A 200 metre minimum order is required when ordering this extra feature.